Scheduling Report
Construction of a Residential House

Faizan Manshad, Kashan Shafiq, Fahad Bin Rasheed, Muhammad Ali

Department of Civil Engineering

MGT462: Project Planning and Management

Dr Hassan Ashraf

June 02, 2025

COMSATS UNIVERSITY ISLAMABAD, WAH CAMPUS

ABSTRACT

This report presents the planning and scheduling of a residential construction project located at XYZ, developed using Primavera P6. With a labor- only contract and a strict one-year completion deadline, the planning process relied on approximate quantity take-offs from architectural drawings and productivity rates sourced from PlanningPlanet.com.

The project team structured the Work Breakdown Structure (WBS) and Organizational Breakdown Structure (OBS) to reflect construction phases and roles. Logical dependencies, including Finish-to-Start (FS) and Start-to-Start (SS) relationships, enabled efficient scheduling using concurrent engineering strategies. Primavera's tools supported constraint configuration, resource histograms, leveling, and the planning of Earned Value Analysis (EVA) and S-curves to monitor performance throughout the project lifecycle. This approach balances academic rigor with practical execution in a real-world setting.

TABLE OF CONTENTS

ABSTRACT II

LIST OF FIGURES IV

1. INTRODUCTION 1

1.1 Overview 1

1.2 Statement of Purpose 1

1.3 Significance 2

1.4 Objectives 2

1.5 Limitations 2

2. RESEARCH PROCEDURE 2

3. PROJECT PLANNING AND SCHEDULING COMPONENTS 3

3.1 Enterprise Project Structure 3

3.2 Organizational Breakdown Structure (OBS) 3

3.3 Work Breakdown Structure (WBS) 3

3.4 Resource Breakdown Structure (RBS) 3

3.5 Gantt Chart / Scheduling Model 4

3.6 Activity List and Duration Estimates 4

3.7 Earned Value Analysis (EVA) 4

3.8 Gantt Representation of EVA 4

3.9 Activity Usage Profile 5

3.10 Resource Usage Profile 6

3.11 All Identified Issues & Risks 6

3.12 Activity Dependencies and Concurrent Engineering 6

3.13 Constraints 7

3.14 Duration Estimation 7

4. CONCLUSION 7

5. RECOMMENDATIONS 7

6. REFRENCES 8

LIST OF FIGURES

Figure 1 Enterprise Project Structure (EPS) 9
Figure 2 Organizational Breakdown structure (OBS) 10
Figure 3 Work Breakdown Structure (WBS) 11
Figure 4 Resource Breakdown Structure (RBS) 12
Figure 5 Activity Usage Profile 13
Figure 6 Resource Usage Profile 14
Figure 7 Gantt Chart Report 23
Figure 8 Activity List and Duration 27
Figure 9 Earned Value Analysis 32
Figure 10 Earned Value Analysis (Ganting) 37

1. INTRODUCTION

1.1 Overview

This report covers the scheduling strategy for a residential construction project located in the prestigious XYZ. The residence sits on a spacious plot measuring 250 feet by 110 feet. It includes a basement, ground, and first floor and is equipped with modern architectural features such as a gym, swimming pool, drawing and dining areas, multiple bedrooms and bathrooms, servant quarters, lawn space, and external development areas.

The scale and complexity of the house required robust planning to meet the client's timeline and quality expectations. Primavera P6 was selected as the project management software to model activities, structure the enterprise environment, and simulate project outcomes. The schedule began with enterprise-level structuring, which involved creating a clear hierarchy of project levels using WBS, OBS, and resource categories. The WBS was broken down by work phases, the OBS by role and responsibility, and resources were categorized based on trade and tasks.

Subsequent activities were mapped with logical dependencies and durations. The planning team utilized concurrent engineering to optimize time—examples include electrical conduit installation running in parallel with plaster work (Start-to-Start relationship), and tiling works starting shortly after screeding. Resource calendars were used to reflect actual site working hours, weekends, and holidays, while Primavera's leveling and histogram tools ensured manpower was allocated without overburdening.

The complexity and volume of construction work required detailed planning to meet client expectations and project deadlines. Primavera P6 was used to map out each phase of construction and to simulate various schedule scenarios. Every phase was analyzed for dependencies, resource demands, and critical path alignment to ensure successful project delivery.

1.2 Statement of Purpose

The purpose of this project is to develop a detailed, realistic, and professional construction schedule using Primavera P6. The scheduling must reflect a one-year delivery constraint and address practical factors such as labor-only contracts, productivity variations, and concurrent task execution.

1.3 Significance

In modern construction management, digital scheduling tools like Primavera P6 play a pivotal role in meeting timelines and budgets. This report exemplifies the real-world application of such software, enhancing engineering decision-making and aligning with PEC and Washington Accord attributes.

1.4 Objectives

- Develop a detailed and logical Work Breakdown Structure (WBS)
- Estimate activity durations based on productivity standards
- Assign roles and resources using a labor-only framework
- Integrate project constraints and calendars
- Apply concurrent engineering principles for optimization
- Create resource histograms and apply leveling techniques
- Plan for earned value tracking and S-curve analysis

1.5 Limitations

- Project duration was restricted to 12 months
- Quantities were approximated due to the unavailability of a formal BOQ
- Productivity rates used for duration estimation were sourced from PlanningPlanet.com
- A labor-only contract restricted resource planning to manpower exclusively

2. RESEARCH PROCEDURE

The research procedure followed a stepwise workflow:

1. Architectural drawings were reviewed in detail to identify spatial allocations and structural requirements.
2. Construction zones were segmented into logical components such as basement work, ground slab, superstructure, and finishes.
3. Work Breakdown Structure (WBS) was prepared by categorizing activities into phases.
4. Activity durations were estimated using online construction productivity databases.
5. Primavera P6 was utilized to enter WBS, create activity lists, and define relationships.
6. Resources were added from the labor category, assigning relevant activities.
7. Logical dependencies (SS, FS) were assigned to maximize overlap and efficiency.

8. Constraints and calendars were introduced to manage working hours and sequencing.
9. Histograms and leveling tools were used to optimize labor demand.
10. Earned Value metrics and S-curve charts were designed to track performance across the project lifecycle.

3. PROJECT PLANNING AND SCHEDULING COMPONENTS

3.1 Enterprise Project Structure

The Enterprise Project Structure (EPS) is used to organize all projects in a structured hierarchy, making it easier to manage and align with the company's overall strategy. In the case of Mr. Azeem Paracha's residence, the project is categorized under "Engineering & Construction," which places it appropriately within TRICONX's project portfolio and ensures consistent tracking, budgeting, and control at the enterprise level.

3.2 Organizational Breakdown Structure (OBS)

The Organizational Breakdown Structure (OBS) assigns responsibilities to various roles involved in the project to ensure clarity and accountability. For this residential project, key roles like Project Manager, Site Engineer, and Safety Officer are assigned to relevant tasks such as excavation, reinforcement works, plumbing, and inspection. This mapping ensures that each activity is supervised by the correct professional and aligns well with the project drawings that highlight the complexity of work such as RCC construction, finishing, and utility installation.

3.3 Work Breakdown Structure (WBS)

The Work Breakdown Structure (WBS) breaks the entire scope of work into smaller, manageable tasks. It outlines all stages including pre-construction, substructure, superstructure, MEP, finishes, and external works. These stages directly correspond to architectural and structural drawings, for example, excavation and basement slab construction match the basement working plans, while electrical and plumbing tasks align with utility layouts. This breakdown allows for better sequencing, scheduling, and progress tracking in Primavera.

3.4 Resource Breakdown Structure (RBS)

The Resource Breakdown Structure (RBS) identifies and categorizes both human resources and equipment—needed for the project. It includes labor roles like masons, painters, electricians, as well as machinery such as cranes and concrete pumps. These resources are assigned to specific

tasks such as concreting, wiring, and cladding. Their assignment matches the physical needs shown in the project drawings, like the requirement of plumbing around bathrooms or concrete work in slabs and walls. This structured allocation ensures proper planning and resource availability throughout the construction process.

3.5 Gantt Chart / Scheduling Model

The **Gantt Chart** visually represents the entire timeline of the TRICON VILLA project from January 2025 to January 2026, breaking down the schedule into phases such as Pre-construction, Substructure, Superstructure, MEP works, Finishes, and Handover. It clearly distinguishes between actual, remaining, and critical activities, which helps in understanding project flow and priority paths. For instance, activities like basement excavation and raft concrete are early drivers for all future tasks, and delays in these would affect subsequent structural and MEP milestones. This aligns well with WBS, which separates work into clean, traceable packages and allows monitoring based on both time and deliverables.

3.6 Activity List and Duration Estimates

The **Activity List and Duration Report** offers granular detail on all 305 tasks, along with predecessors and dependencies. Each task is sequentially linked to ensure smooth handoffs—from excavation to waterproofing to painting—ensuring no phase is isolated. This careful logic prevents misalignment between work packages and enhances schedule reliability. The durations are realistic based on typical construction rates and equipment productivity, further validating the estimates against drawing-based quantities.

3.7 Earned Value Analysis (EVA)

The Earned Value Analysis (EVA) gives detailed insight into project health. As of the data date **28 May 2025**, key indicators show the project has an Earned Value (EV) of Rs 1.71 million against an Actual Cost (AC) of Rs 1.72 million and a Planned Value (PV) of Rs 1.82 million. This means you're slightly over budget and slightly behind schedule. The SPI of 0.94 suggests a 6% delay against plan, while the CPI of 0.99 reflects tight cost control. Specific delays were seen in beam shuttering, staircase works, and conduit installations—all time-sensitive and labor-heavy, confirming that constrained execution periods and resource synchronization are vital under the 12-month limit.

3.8 Gantt Representation of EVA

The **Gantt Representation of Earned Value Analysis (EVA)** visually combines schedule and cost data, showing planned, earned, and actual values across the project timeline. In this TRICON VILLA project, early phases like excavation and rafts align closely with the baseline, but delays appear during superstructure and MEP works. These are visible as shifts in actual progress bars compared to planned ones, reflecting an SPI of 0.94—indicating slight schedule slippage despite near-budget performance (CPI ≈ 0.99).

Critical activities such as beam reinforcement and conduit laying show visible gaps, confirming issues also listed in the Issues Report. This Gantt EVA helps pinpoint exactly where value is lagging and supports fast decision-making on resource reallocation or task resequencing—especially important under the 12-month constraint. It complements the S-curve and resource profile by visually tying performance metrics directly to the timeline and work structure.

3.9 Activity Usage Profile

The **Activity Usage Profile** represents how the project's cost is planned, earned, and spent overtime. The graph shows several curves: Budgeted Total Cost, Actual Total Cost, Remaining Total Cost, Planned Value, and Earned Value. These curves together visualize the cash flow and performance of the project. In this case, the graph roughly follows an **S-curve** pattern, which is typical of construction projects where work starts slowly, accelerates mid-way, and then tapers off toward completion. This curve reflects the increasing complexity and resource demand during the superstructure and finishing phases, as seen in your WBS and architectural plans.

The **S-curve** is crucial because it provides a visual check of project health: alignment between Planned Value and Earned Value indicates good progress, while deviations can signal delays or inefficiencies. If this curve appears slightly lagged or less steep than expected, it may suggest that certain activities (like MEP works or external finishes) started later than planned or required rework. The constraint to complete the project within **12 months** increases the criticality of maintaining the intended curve shape. Delays in early stages such as excavation, concrete works, or MEP rough-ins—clearly depicted in your Primavera schedule and project drawings—can compress later activities, making resource coordination more intense.

3.10 Resource Usage Profile

The **Resource Usage Profile** graph shows the distribution of labor and equipment utilization across the project timeline. It displays Budgeted Units, Actual Units, Overallocated Units, and Resource Limits. This chart follows a **normal distribution pattern**, where resource usage gradually rises, peaks in the middle months, and then declines. This distribution is logical, as peak activity—like RCC structure completion, internal finishes, and installation of MEP systems—occurs mid-project. These stages correspond with complex areas of the drawings such as slab reinforcements, bathroom fittings, and tile/paint finishes.

This profile helps ensure resources like steel fixers, masons, electricians, and painters (as seen in your RBS) are optimally allocated without overburdening specific teams. The absence of significant overallocation spikes suggests effective scheduling of overlapping trades. However, if overallocations occur near the curve's peak, it could be due to rework, delayed deliveries, or compressed deadlines resulting from early-stage slippages, something to watch out for under the 12-month constraint.

Additional insights from the Primavera schedule show that tasks are logically sequenced, starting with site survey, followed by substructure and superstructure, and culminating with MEP and finishing activities. Key milestones—like completion of plinth beams, roof slab, and final inspections—are aligned with typical villa construction progressions. The project's full cycle, from mobilization to handover, matches both Primavera logic and architectural design intent

3.11 All Identified Issues & Risks

The **Earned Value Analysis (EVA)** gives detailed insight into project health. Key indicators show the project has an Earned Value (EV) of Rs 1.71 million against an Actual Cost (AC) of Rs 1.72 million and a Planned Value (PV) of Rs 1.82 million. This means you're slightly over budget and slightly behind schedule. The SPI of 0.94 suggests a 6% delay against plan, while the CPI of 0.99 reflects tight cost control. Specific delays were seen in beam shuttering, staircase works, and conduit installations—all time-sensitive and labor-heavy, confirming that constrained execution periods and resource synchronization are vital under the 12-month limit

3.12 Activity Dependencies and Concurrent Engineering

To ensure an optimized schedule, concurrent engineering was implemented. Logical relationships were applied such as:

- **Finish-to-Start (FS)**:
    - Basement Slab → Ground Floor Columns
    - Internal Plaster → Paint Works
- **Start-to-Start (SS)**:
    - Wall Plastering ↔ Electrical Conduit Fixing
    - Plumbing Works ↔ Block Masonry
    - Screed Laying ↔ Tile Fixing (staggered)

This allowed overlapping of tasks, reducing waiting time and ensuring continuous workflow.

3.13 Constraints

- "Must Start On" constraint applied to the Groundbreaking activity
- Must finish within 12 months
- Work week calendar: 6 working days with 1 off-day
- Public holidays and break periods entered as non-working days

3.14 Duration Estimation

Activity durations were estimated using http://www.planningplanet.com/ production rates. Sample calculations:

- Brick Masonry: 5 sqm/day/labor
- Plastering: 6 sqm/day
- Tile Fixing: 4 sqm/day/skilled worker

These rates were multiplied by estimated quantities calculated from architectural drawings to determine durations.

4. CONCLUSION

The TRICON VILLA project, managed through Primavera P6, reflects a well-structured and logically sequenced construction plan supported by detailed EPS, OBS, WBS, and RBS frameworks. The project is generally on budget with a Cost Performance Index (CPI) of 0.99, and although the Schedule Performance Index (SPI) of 0.94 indicates minor delays, critical early works such as excavation, raft concreting, and plinth construction have been completed. Visual tools like the Gantt chart, S-curve activity profile, and normal-distributed resource profile confirm effective planning but highlight performance lags in structural and MEP stages. The integration of Earned

Value Analysis with schedule tracking has made it possible to identify issues in real-time and maintain control within the strict 12-month deadline.

However, it is important to note that several activities are currently showing **negative float**, indicating they are already delayed and directly affecting the project completion date. Due to these delays, the project is now forecasted to finish on **6 January 2026** instead of the planned **31 December 2025**, requiring immediate **acceleration measures** to bring these activities back on track. Additionally, the **baseline schedule** originally included a **4-day terminal float**, with a scheduled completion date of **26 December 2025**, further emphasizing the need for corrective action to avoid exceeding the contractual deadline.

5. RECOMMENDATIONS

- **Accelerate Lagging Activities:** Immediately address delayed tasks in the superstructure and MEP phases through additional labor shifts or resource reallocation to recover schedule time.
- **Closely Monitor Critical Path:** Maintain weekly reviews of the Gantt EVA and critical path updates to prevent further slippage in dependent activities.
- **Mitigate Start Date Variances:** Resolve start-date issues flagged in the Issues Log by improving coordination between design approvals, site teams, and subcontractors.
- **Use Buffer Management:** Introduce float or time buffers for activities approaching resource peaks, especially in finishing and services installation, to absorb any unforeseen delays.
- **Update the Schedule Regularly:** Keep Primavera data updated in real time to reflect accurate actuals, ensuring decisions are based on the latest progress.
- **Enhance Communication:** Strengthen coordination among OBS-defined roles, especially between planning, site, and safety teams—to streamline execution and avoid rework.

By acting on these measures, the project can stay within its cost and time targets and ensure the successful delivery of a high-quality residential structure.

6. REFRENCES

- http://www.planningplanet.com/

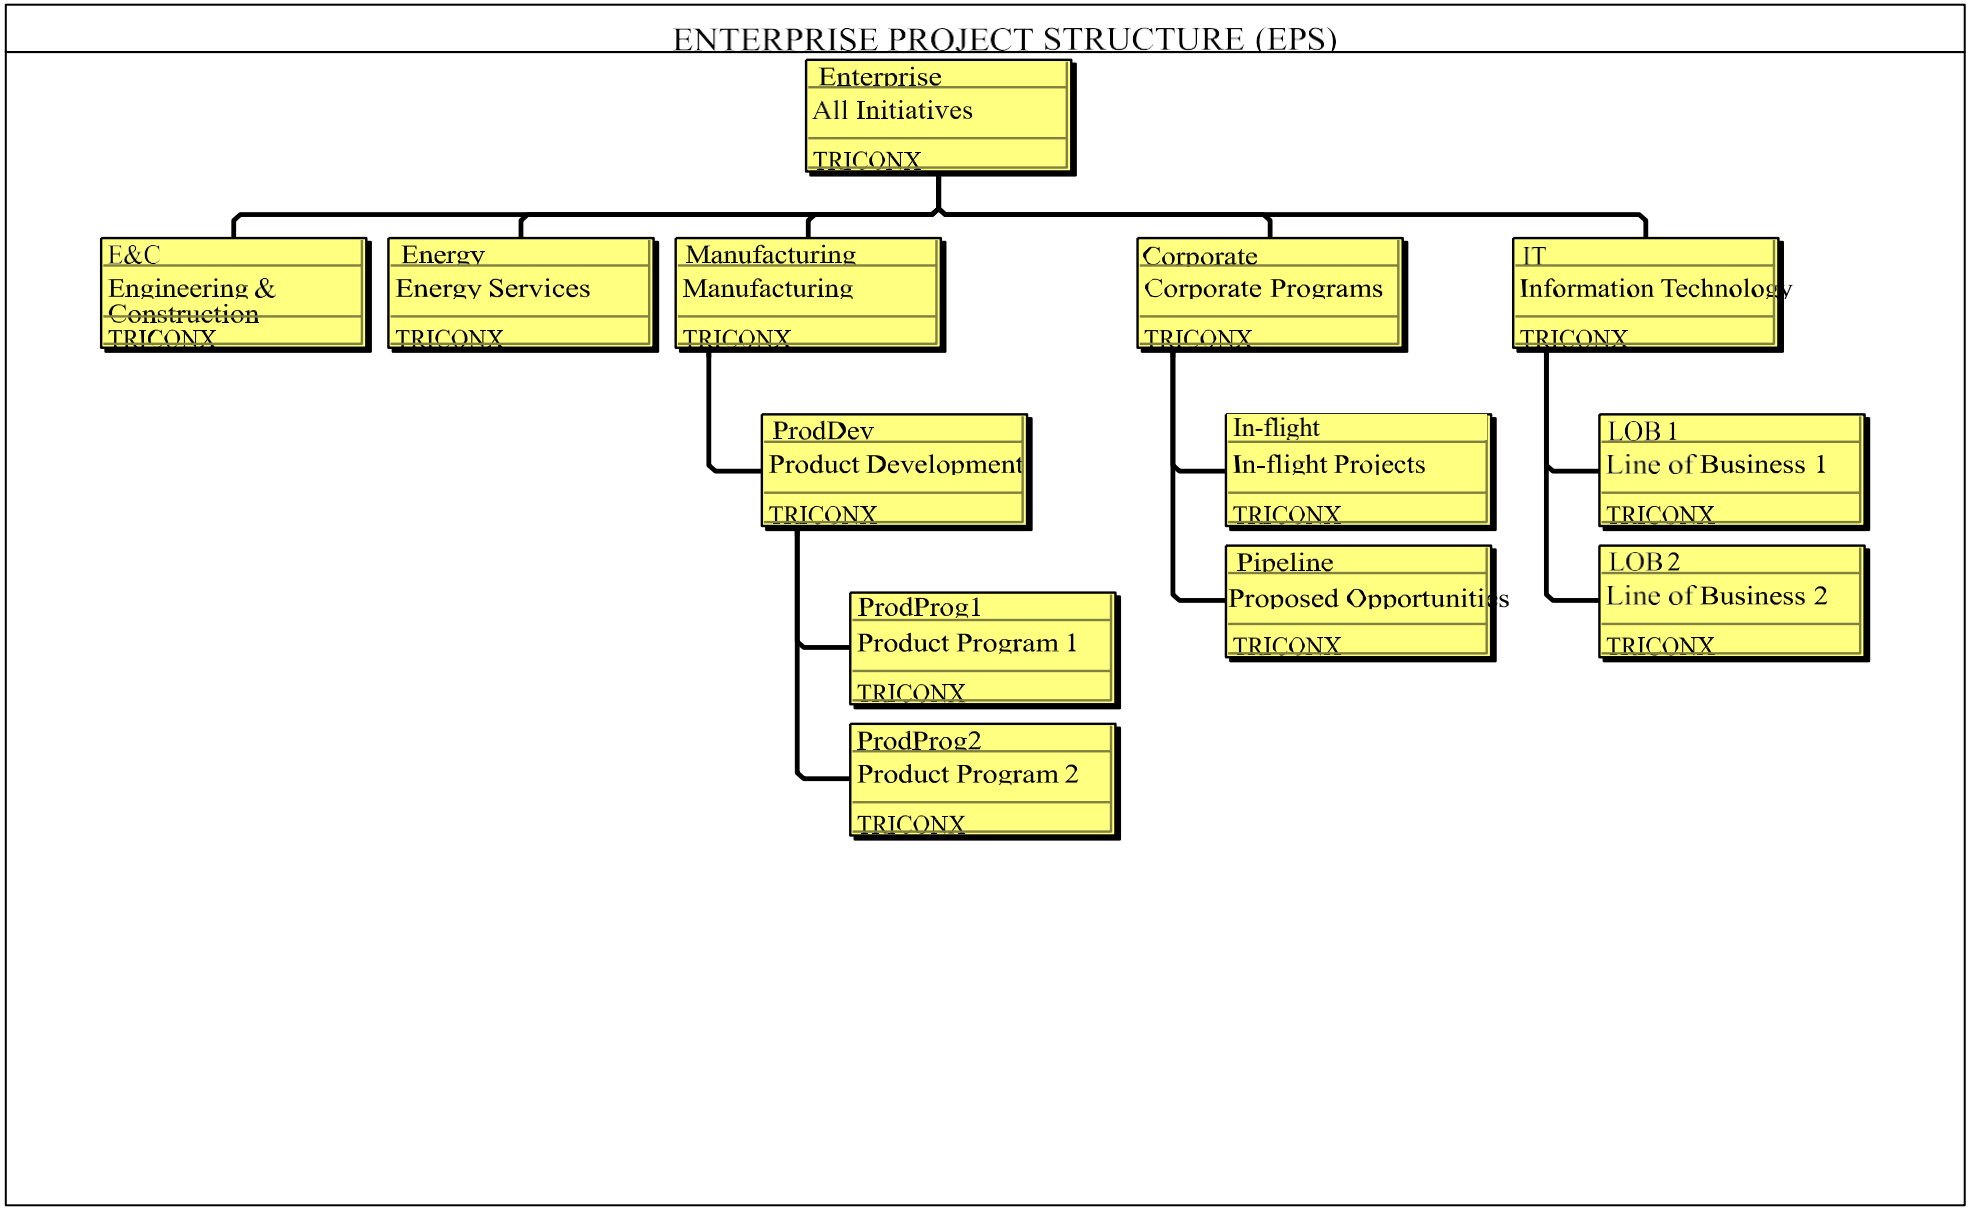


Figure 1 Enterprise Project Structure (EPS)

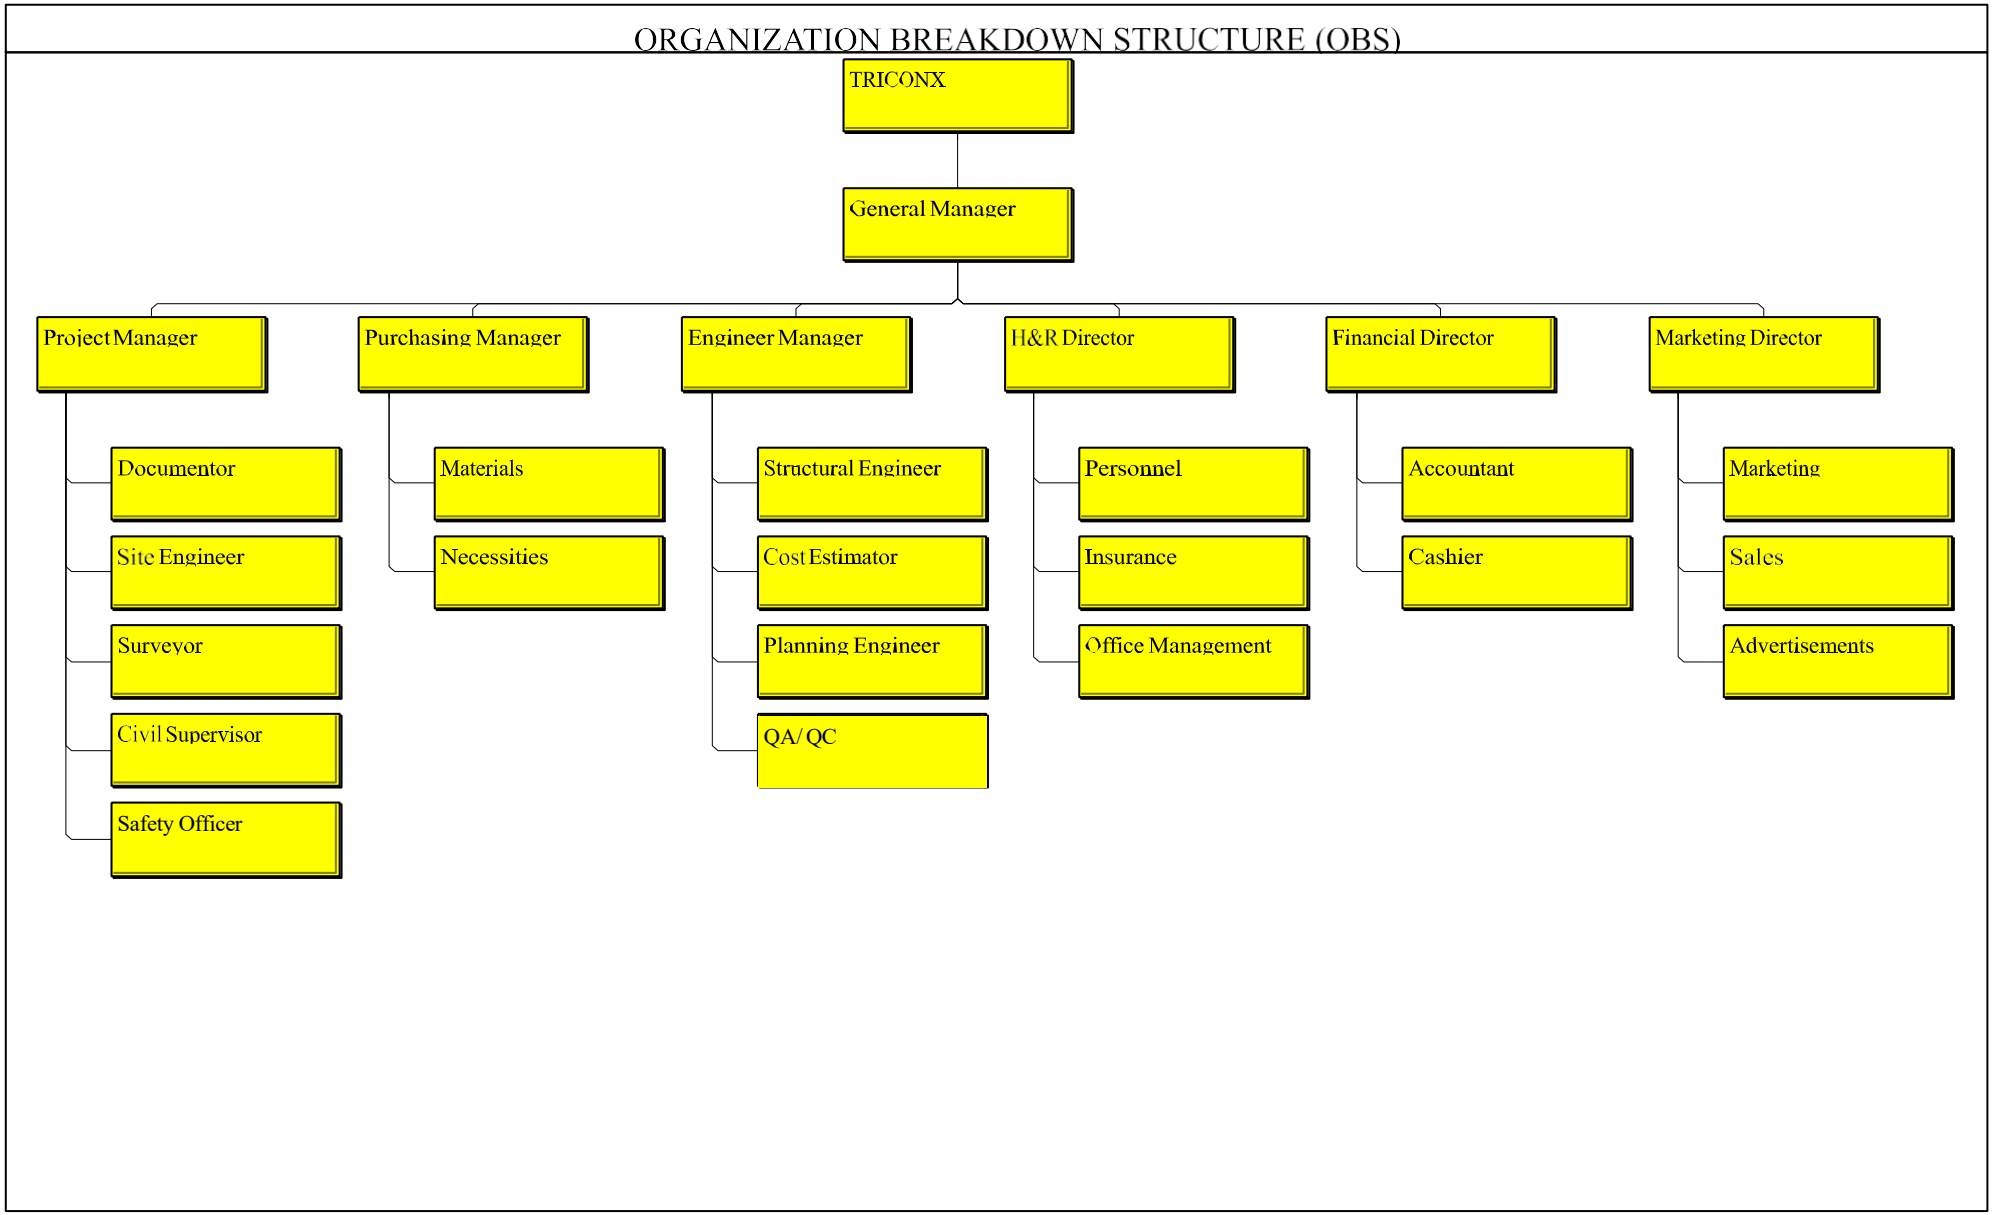


Figure 2 Organizational Breakdown structure (OBS)

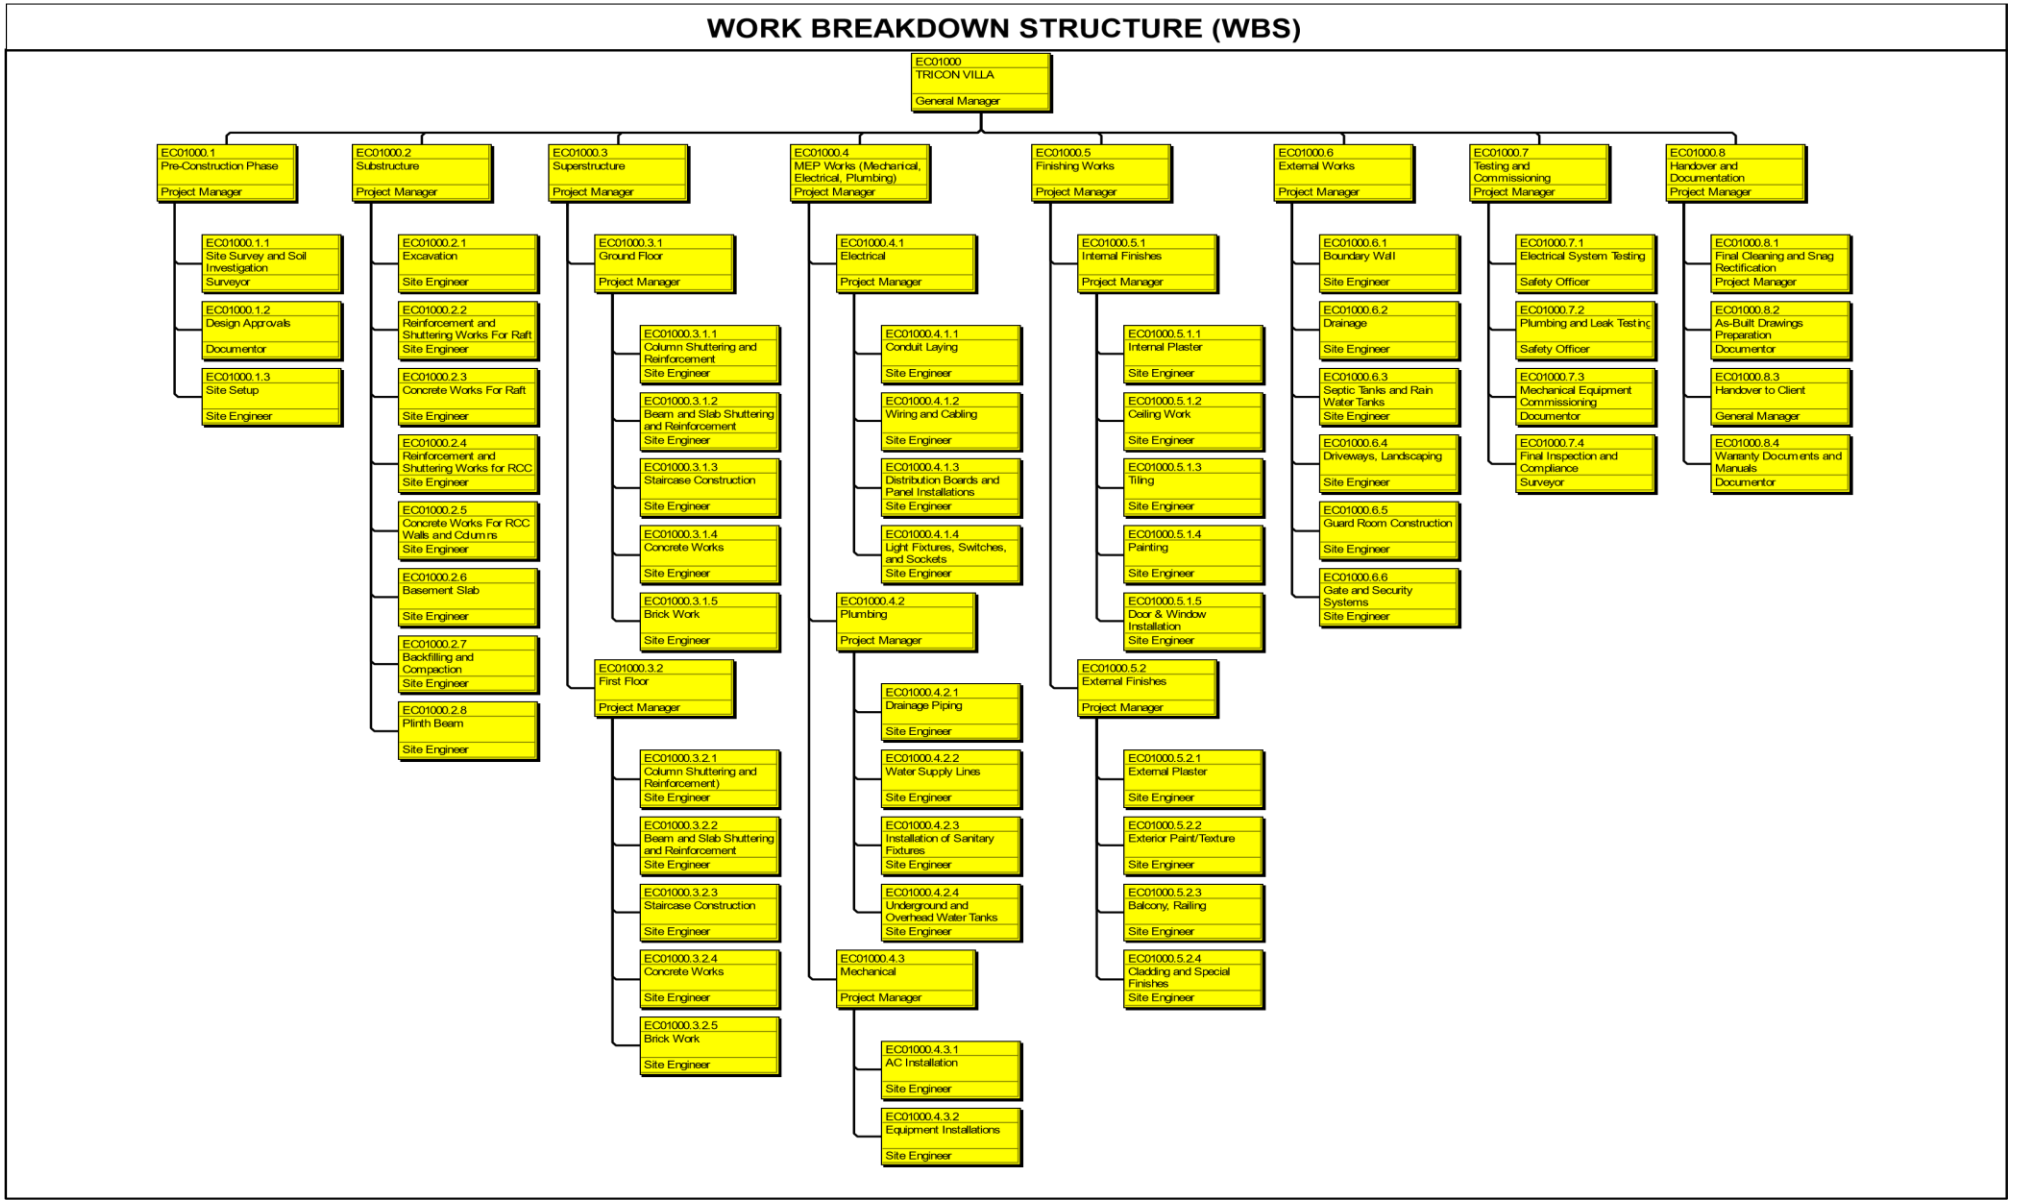


Figure 3 Work Breakdown Structure (WBS)

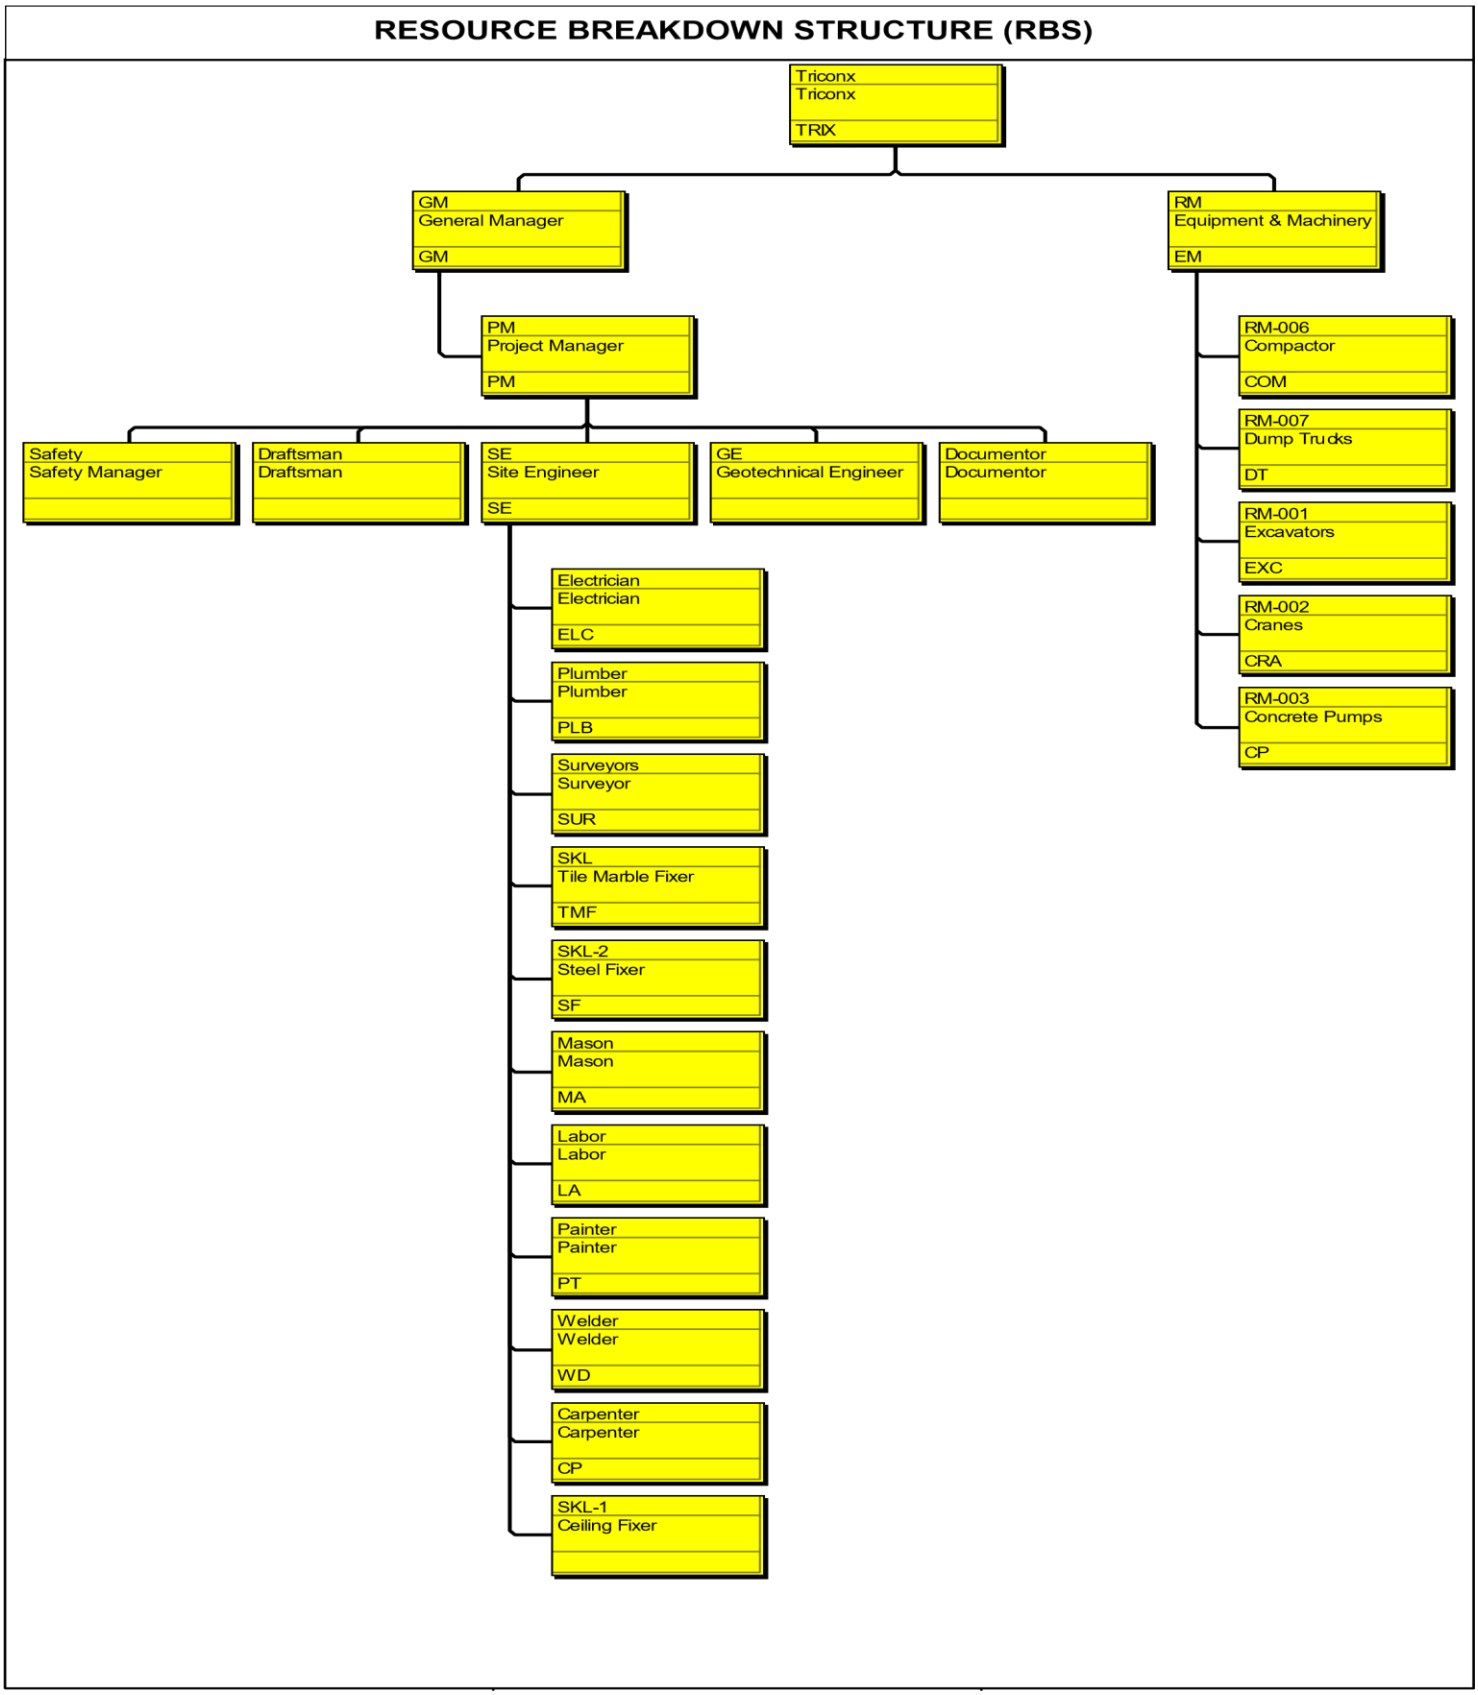


Figure 4 Resource Breakdown Structure (RBS)

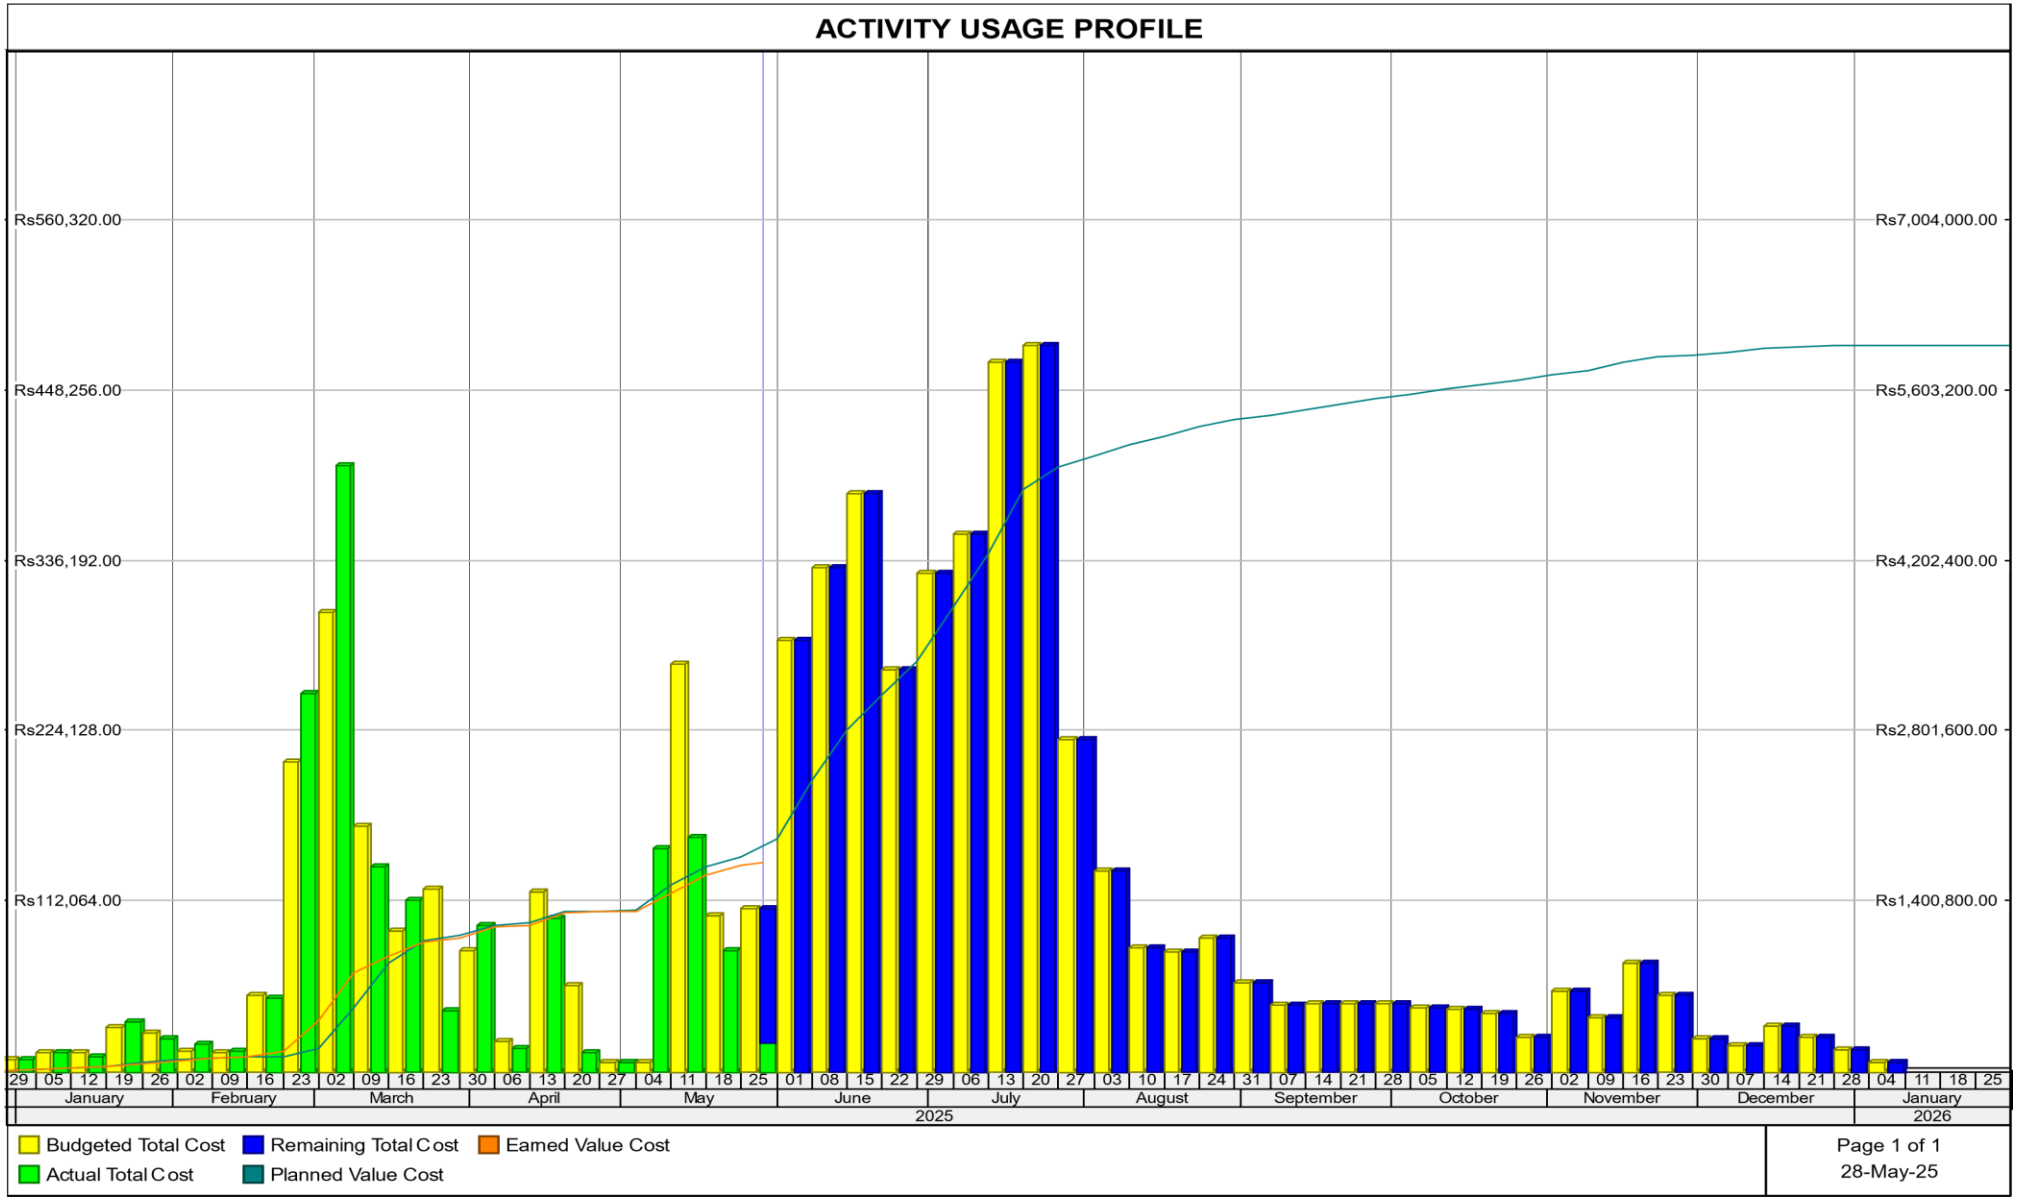


Figure 5 Activity Usage Profile

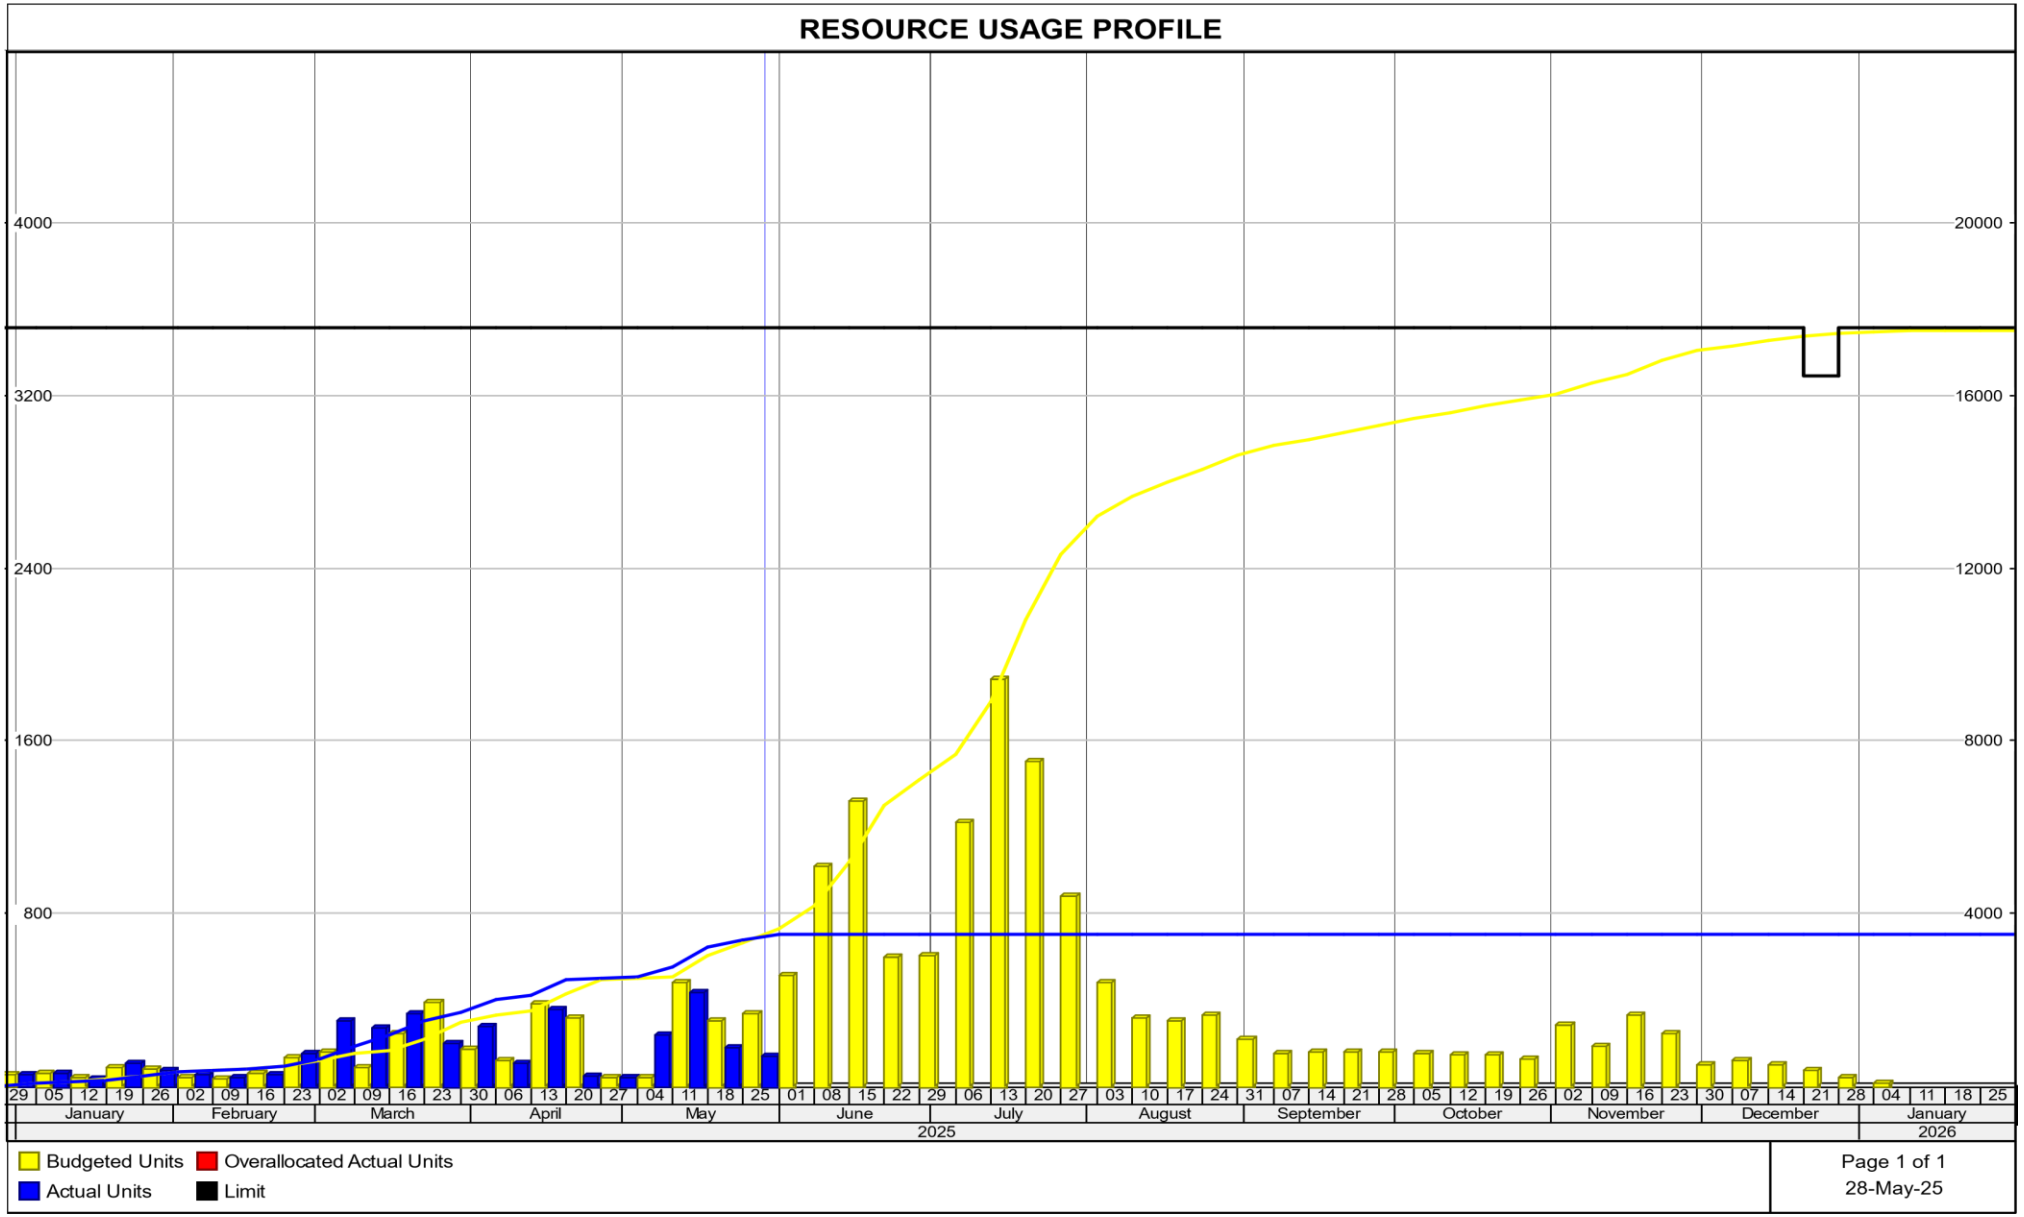
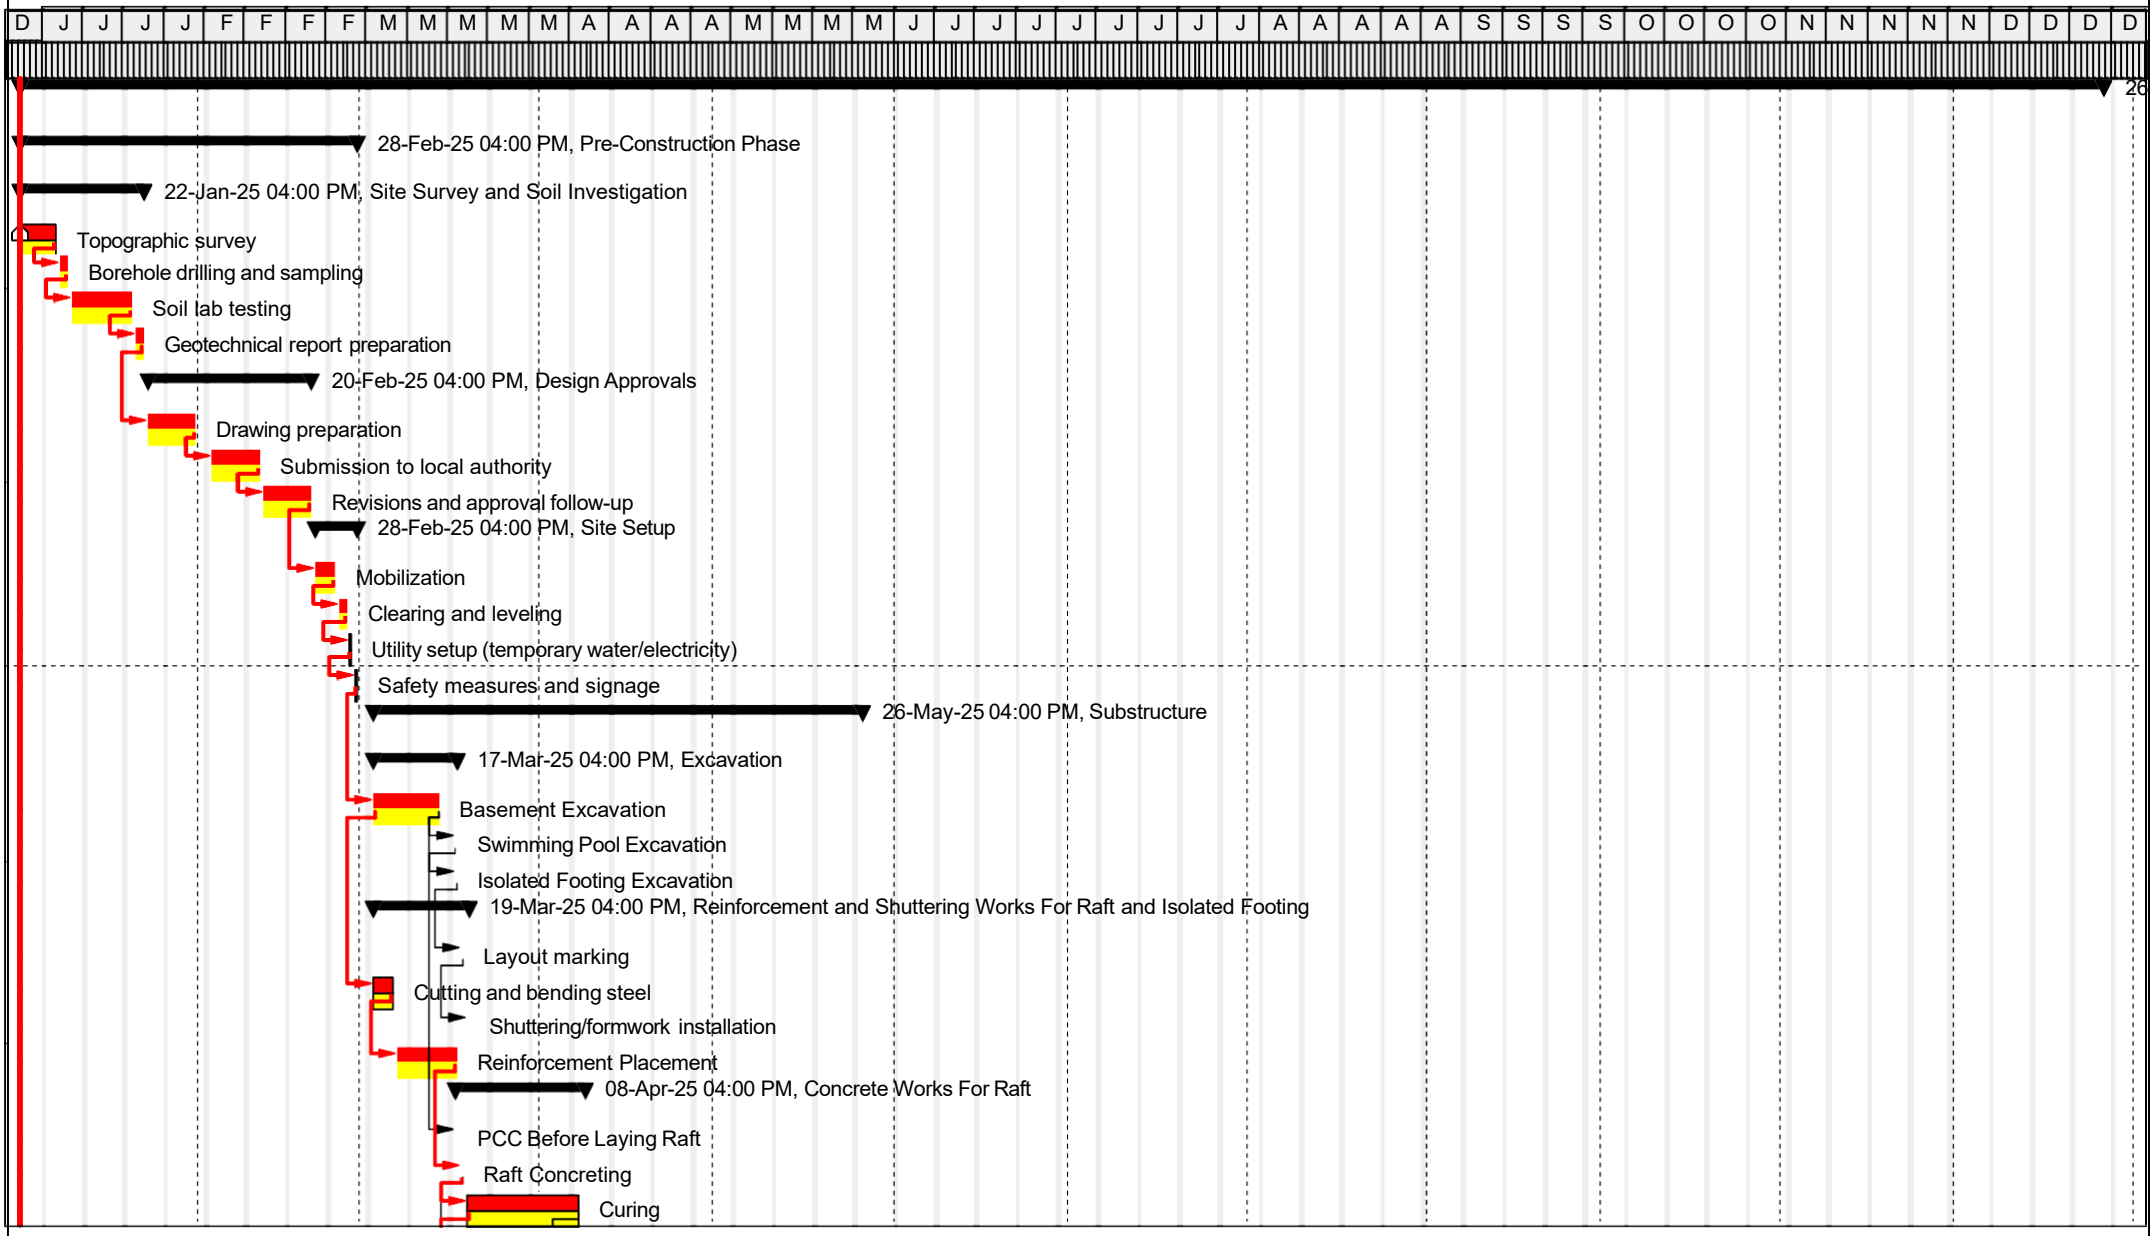
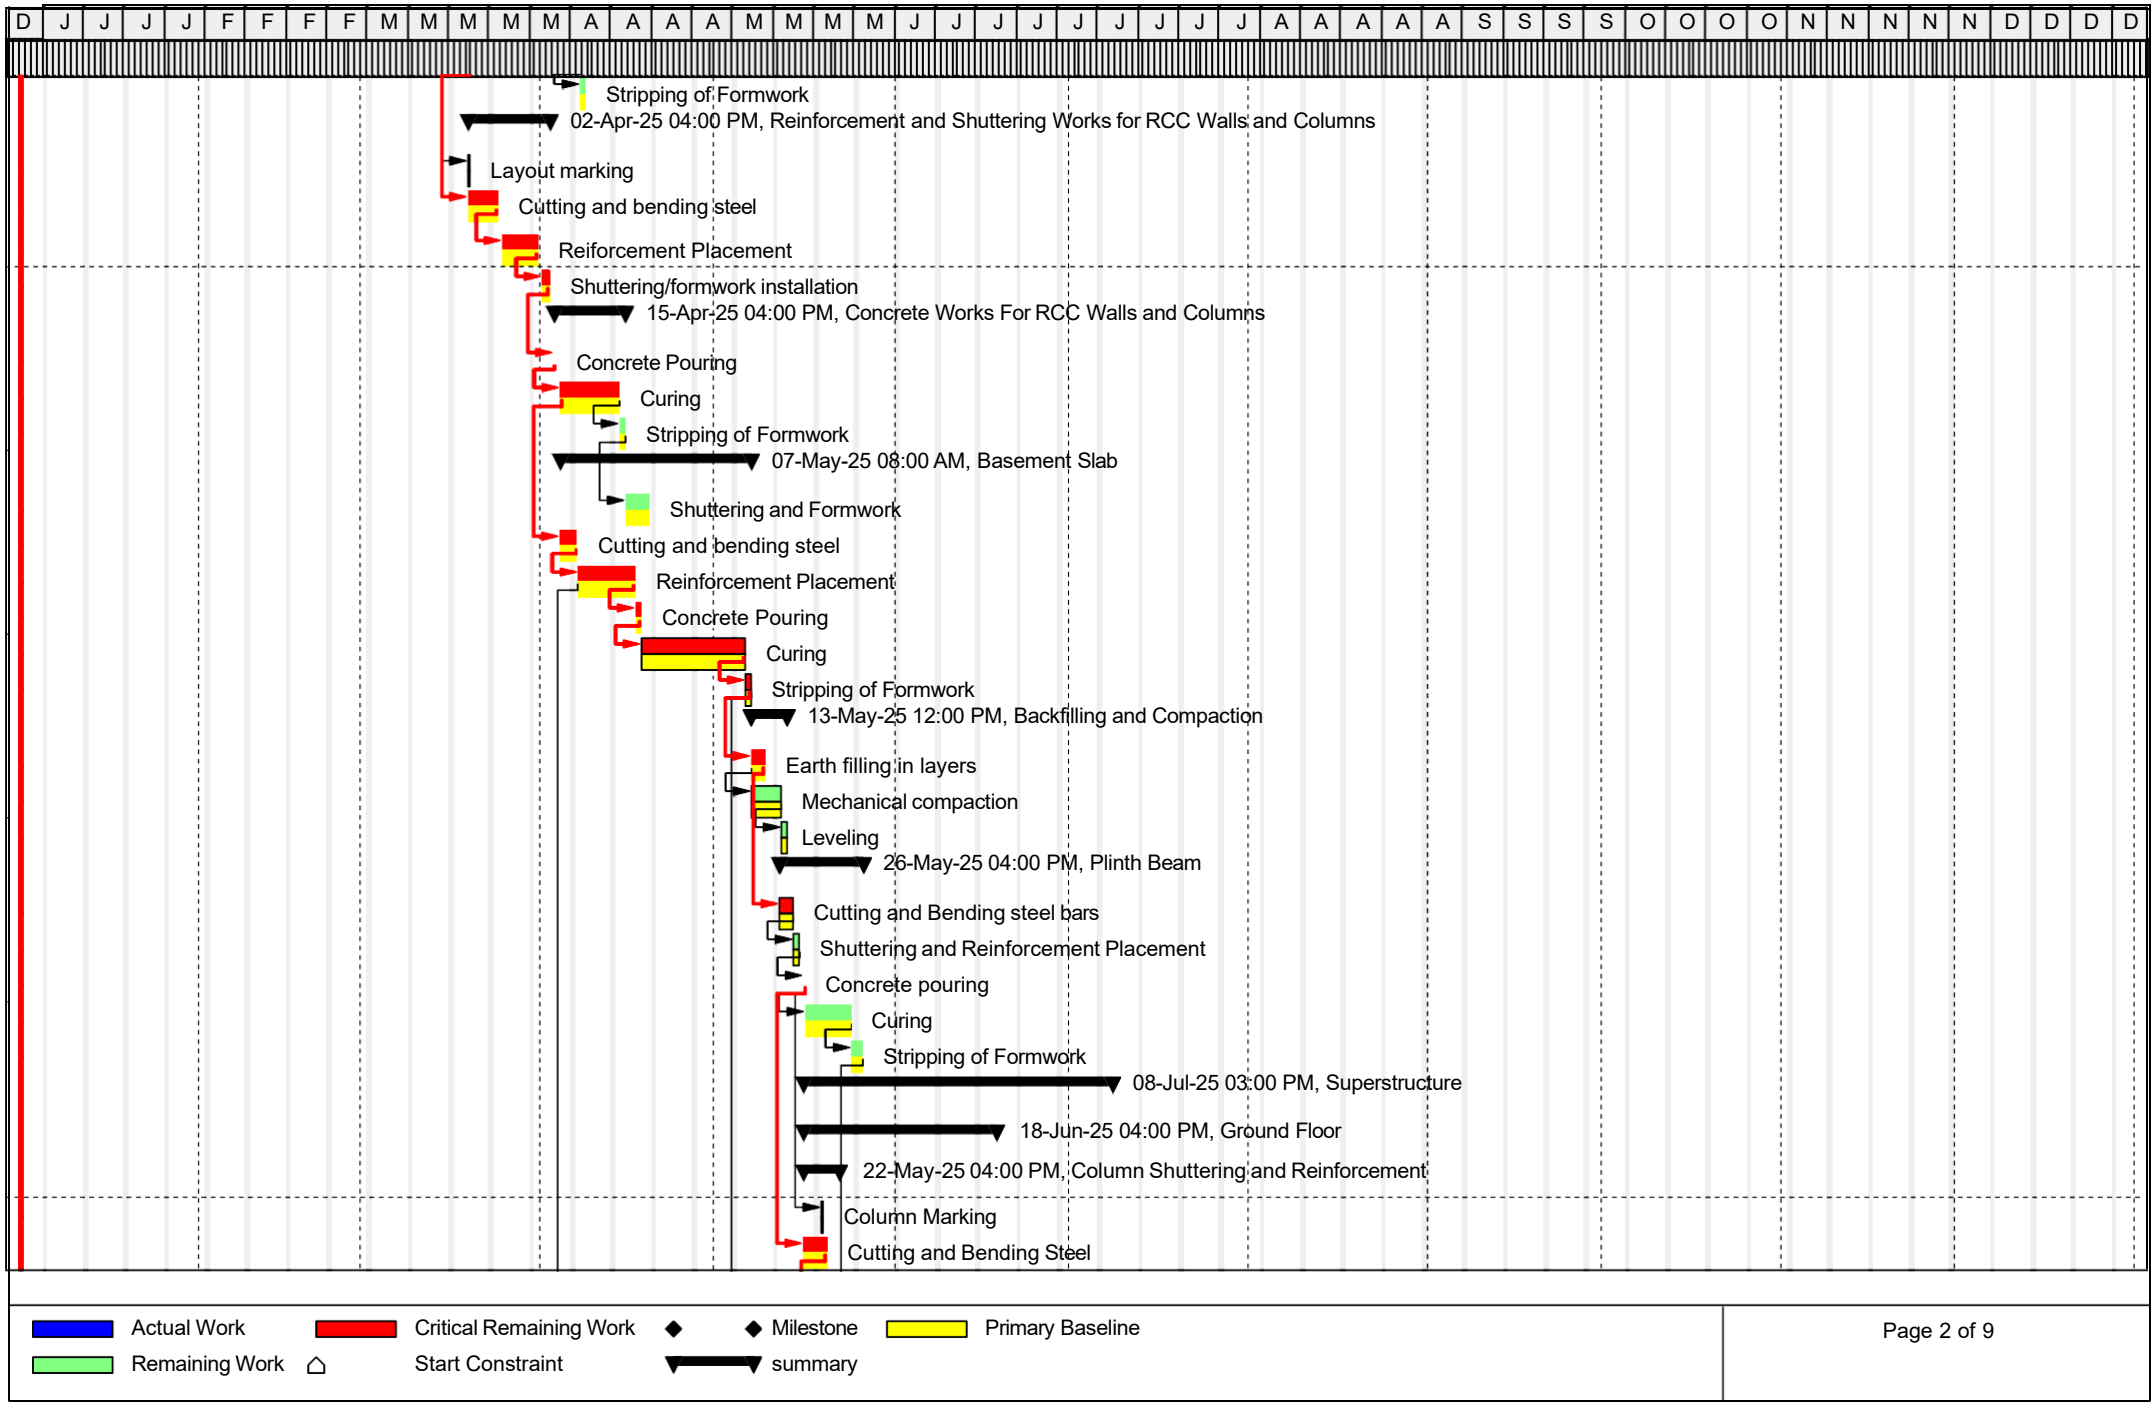
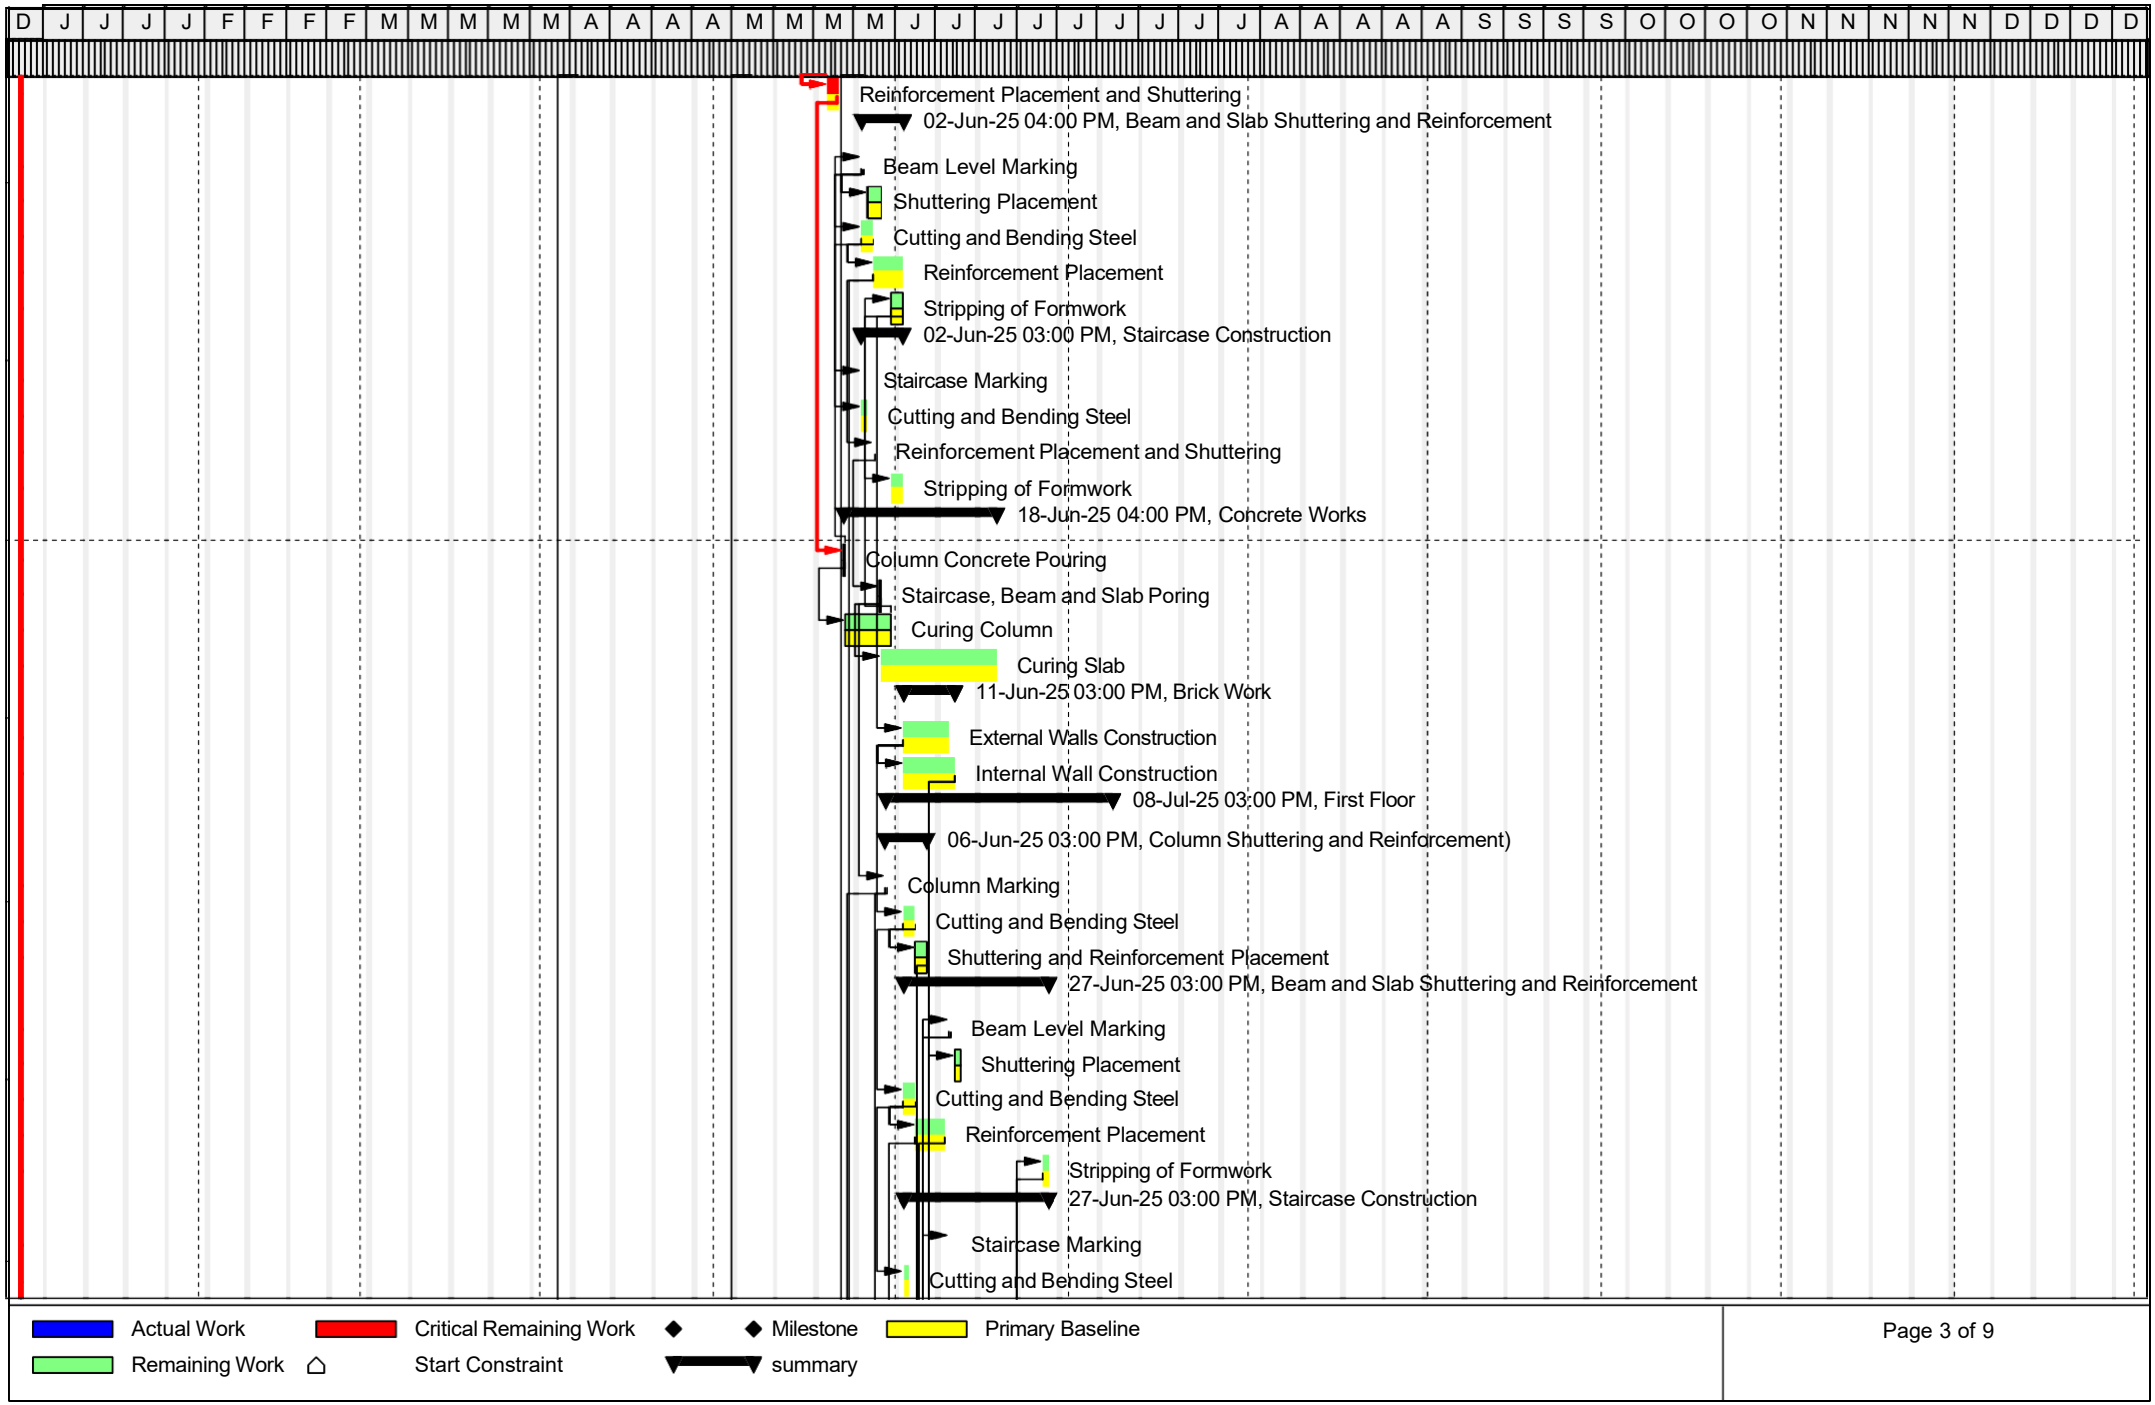



Figure 6 Resource Usage Profile

GANTT CHART


D J J J J F F F F M M M M M A A A A M M M M J J J J J J J J A A A A A S S S S O O O O N N N N N D D D D
28-Feb-25 04:00 PM, Pre-Construction Phase
22-Jan-25 04:00 PM, Site Survey and Soil Investigation
Topographic survey
Borehole drilling and sampling
Soil lab testing
Geotechnical report preparation
20-Feb-25 04:00 PM, Design Approvals
Drawing preparation
Submission to local authority
Revisions and approval follow-up
28-Feb-25 04:00 PM, Site Setup
Mobilization
Clearing and leveling
Utility setup (temporary water/electricity)
Safety measures and signage
26-May-25 04:00 PM, Substructure
17-Mar-25 04:00 PM, Excavation
Basement Excavation
Swimming Pool Excavation
Isolated Footing Excavation
19-Mar-25 04:00 PM, Reinforcement and Shuttering Works For Raft and Isolated Footing
Layout marking
Cutting and bending steel
Shuttering/formwork installation
Reinforcement Placement
08-Apr-25 04:00 PM, Concrete Works For Raft
PCC Before Laying Raft
Raft Concreting
Curing
Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline


D J J J J F F F F M M M M M A A A A M M M M J J J J J J J J A A A A A S S S S O O O O N N N N N D D D D
Stripping of Formwork
02-Apr-25 04:00 PM, Reinforcement and Shuttering Works for RCC Walls and Columns
Layout marking
Cutting and bending steel
Reiforcement Placement
Shuttering/formwork installation
15-Apr-25 04:00 PM, Concrete Works For RCC Walls and Columns
Concrete Pouring
Curing
Stripping of Formwork
07-May-25 08:00 AM, Basement Slab
Shuttering and Formwork
Cutting and bending steel
Reinforcement Placement
Concrete Pouring
Curing
Stripping of Formwork
13-May-25 12:00 PM, Backfilling and Compaction
Earth filling in layers
Mechanical compaction
Leveling
26-May-25 04:00 PM, Plinth Beam
Cutting and Bending steel bars
Shuttering and Reinforcement Placement
Concrete pouring
Curing
Stripping of Formwork
08-Jul-25 03:00 PM, Superstructure
18-Jun-25 04:00 PM, Ground Floor
22-May-25 04:00 PM, Column Shuttering and Reinforcement
Column Marking
Cutting and Bending Steel
Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline



D J J J J F F F F M M M M M A A A A M M M M J J J J J J J J A A A A A S S S S O O O O N N N N N D D D D
Reinforcement Placement and Shuttering
02-Jun-25 04:00 PM, Beam and Slab Shuttering and Reinforcement
Beam Level Marking
Shuttering Placement
Cutting and Bending Steel
Reinforcement Placement
Stripping of Formwork
02-Jun-25 03:00 PM, Staircase Construction
Staircase Marking
Cutting and Bending Steel
Reinforcement Placement and Shuttering
Stripping of Formwork
18-Jun-25 04:00 PM, Concrete Works
Column Concrete Pouring
Staircase, Beam and Slab Poring
Curing Column
Curing Slab
11-Jun-25 03:00 PM, Brick Work
External Walls Construction
Internal Wall Construction
08-Jul-25 03:00 PM, First Floor
06-Jun-25 03:00 PM, Column Shuttering and Reinforcement)
Column Marking
Cutting and Bending Steel
Shuttering and Reinforcement Placement
27-Jun-25 03:00 PM, Beam and Slab Shuttering and Reinforcement
Beam Level Marking
Shuttering Placement
Cutting and Bending Steel
Reinforcement Placement
Stripping of Formwork
27-Jun-25 03:00 PM, Staircase Construction
Staircase Marking
Cutting and Bending Steel
Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

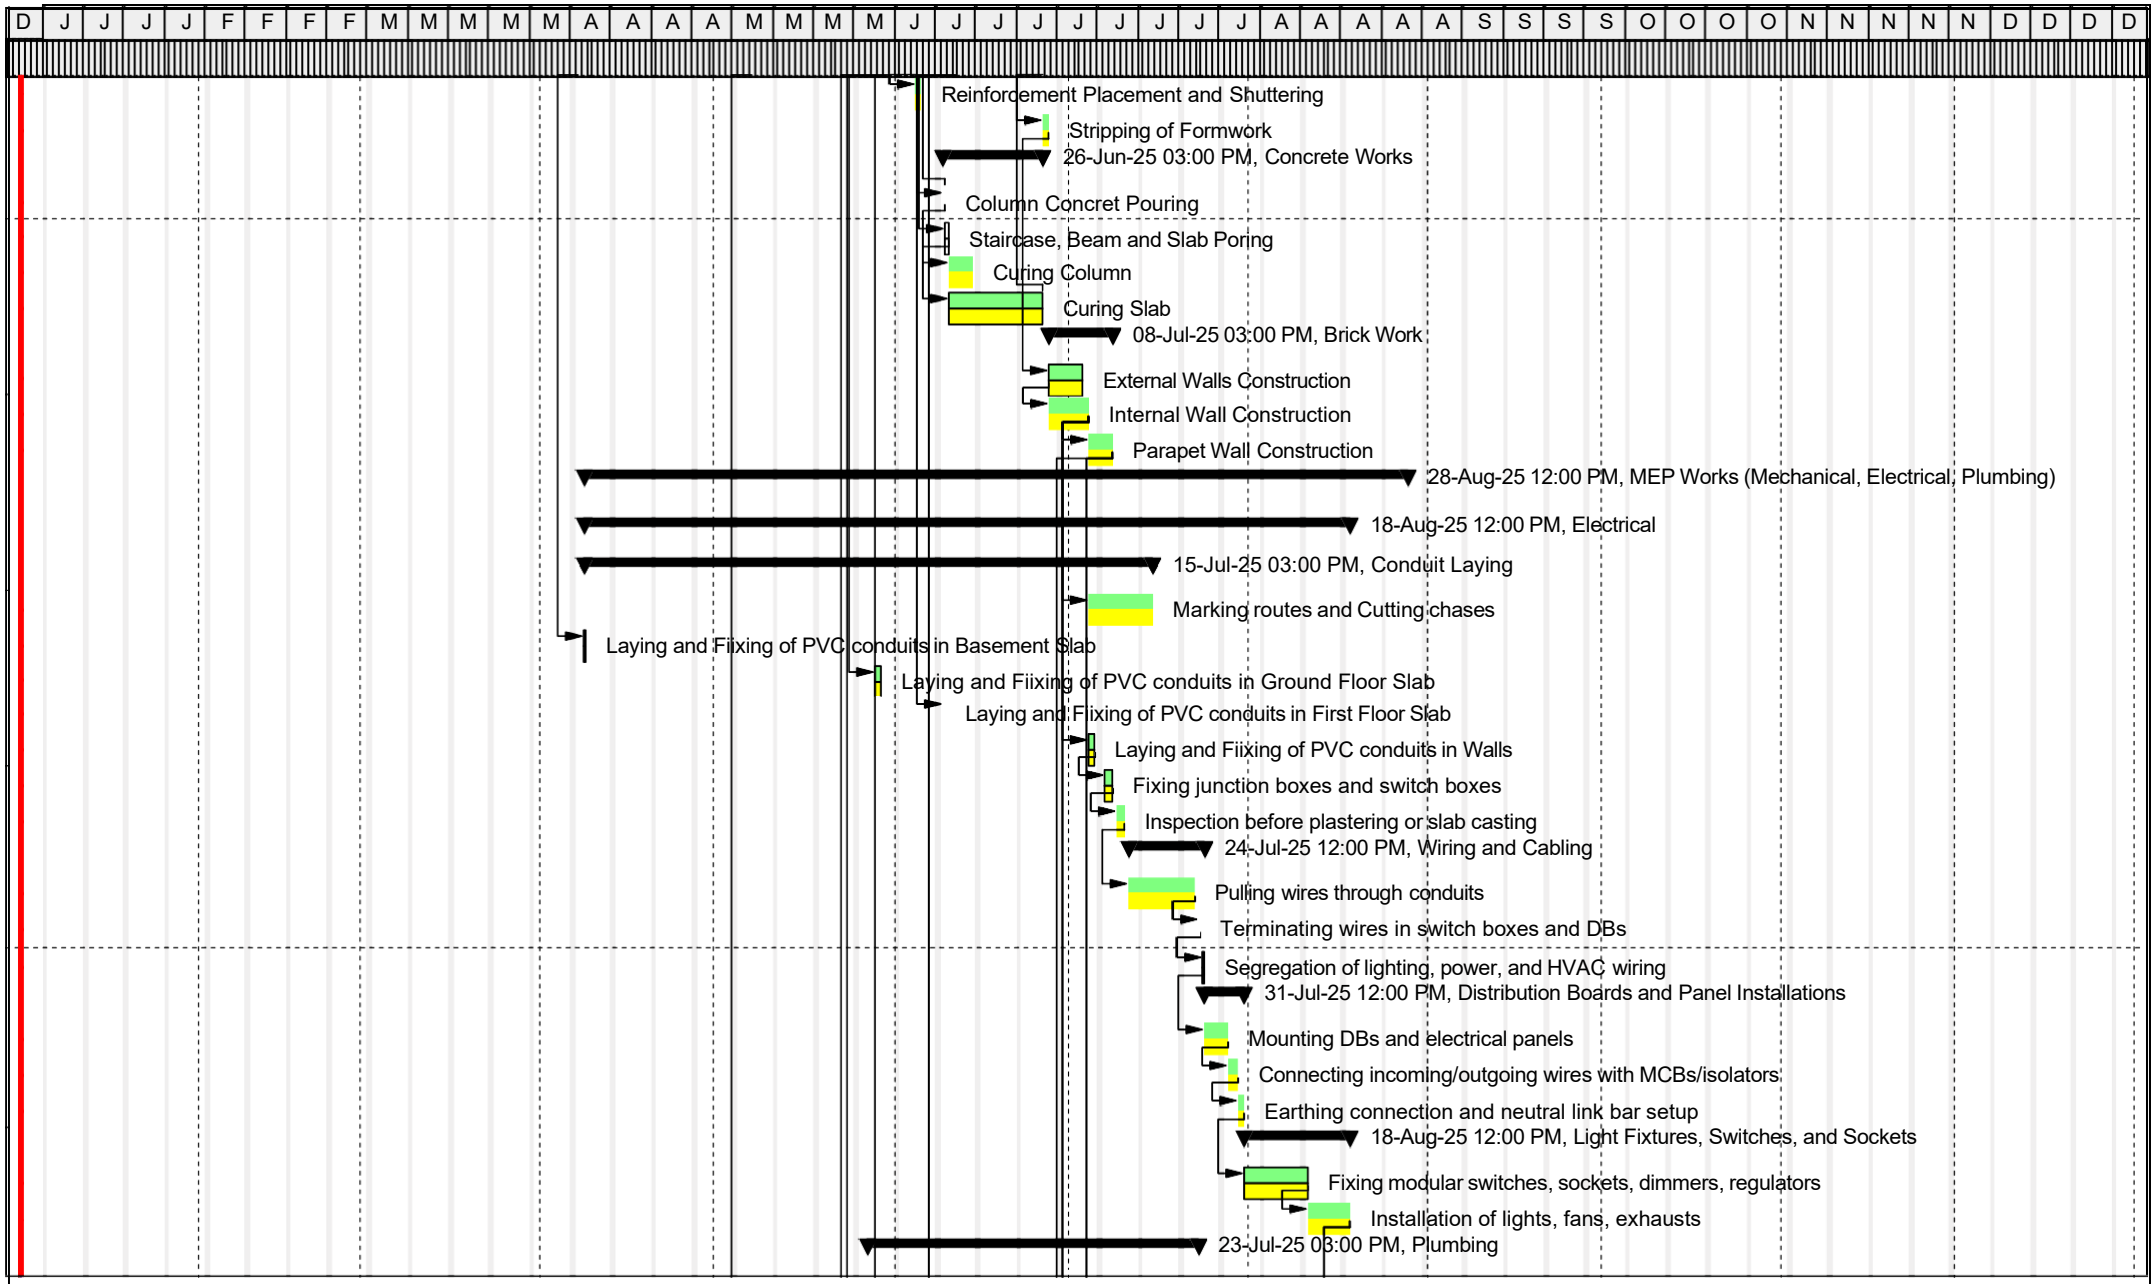


Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline



Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

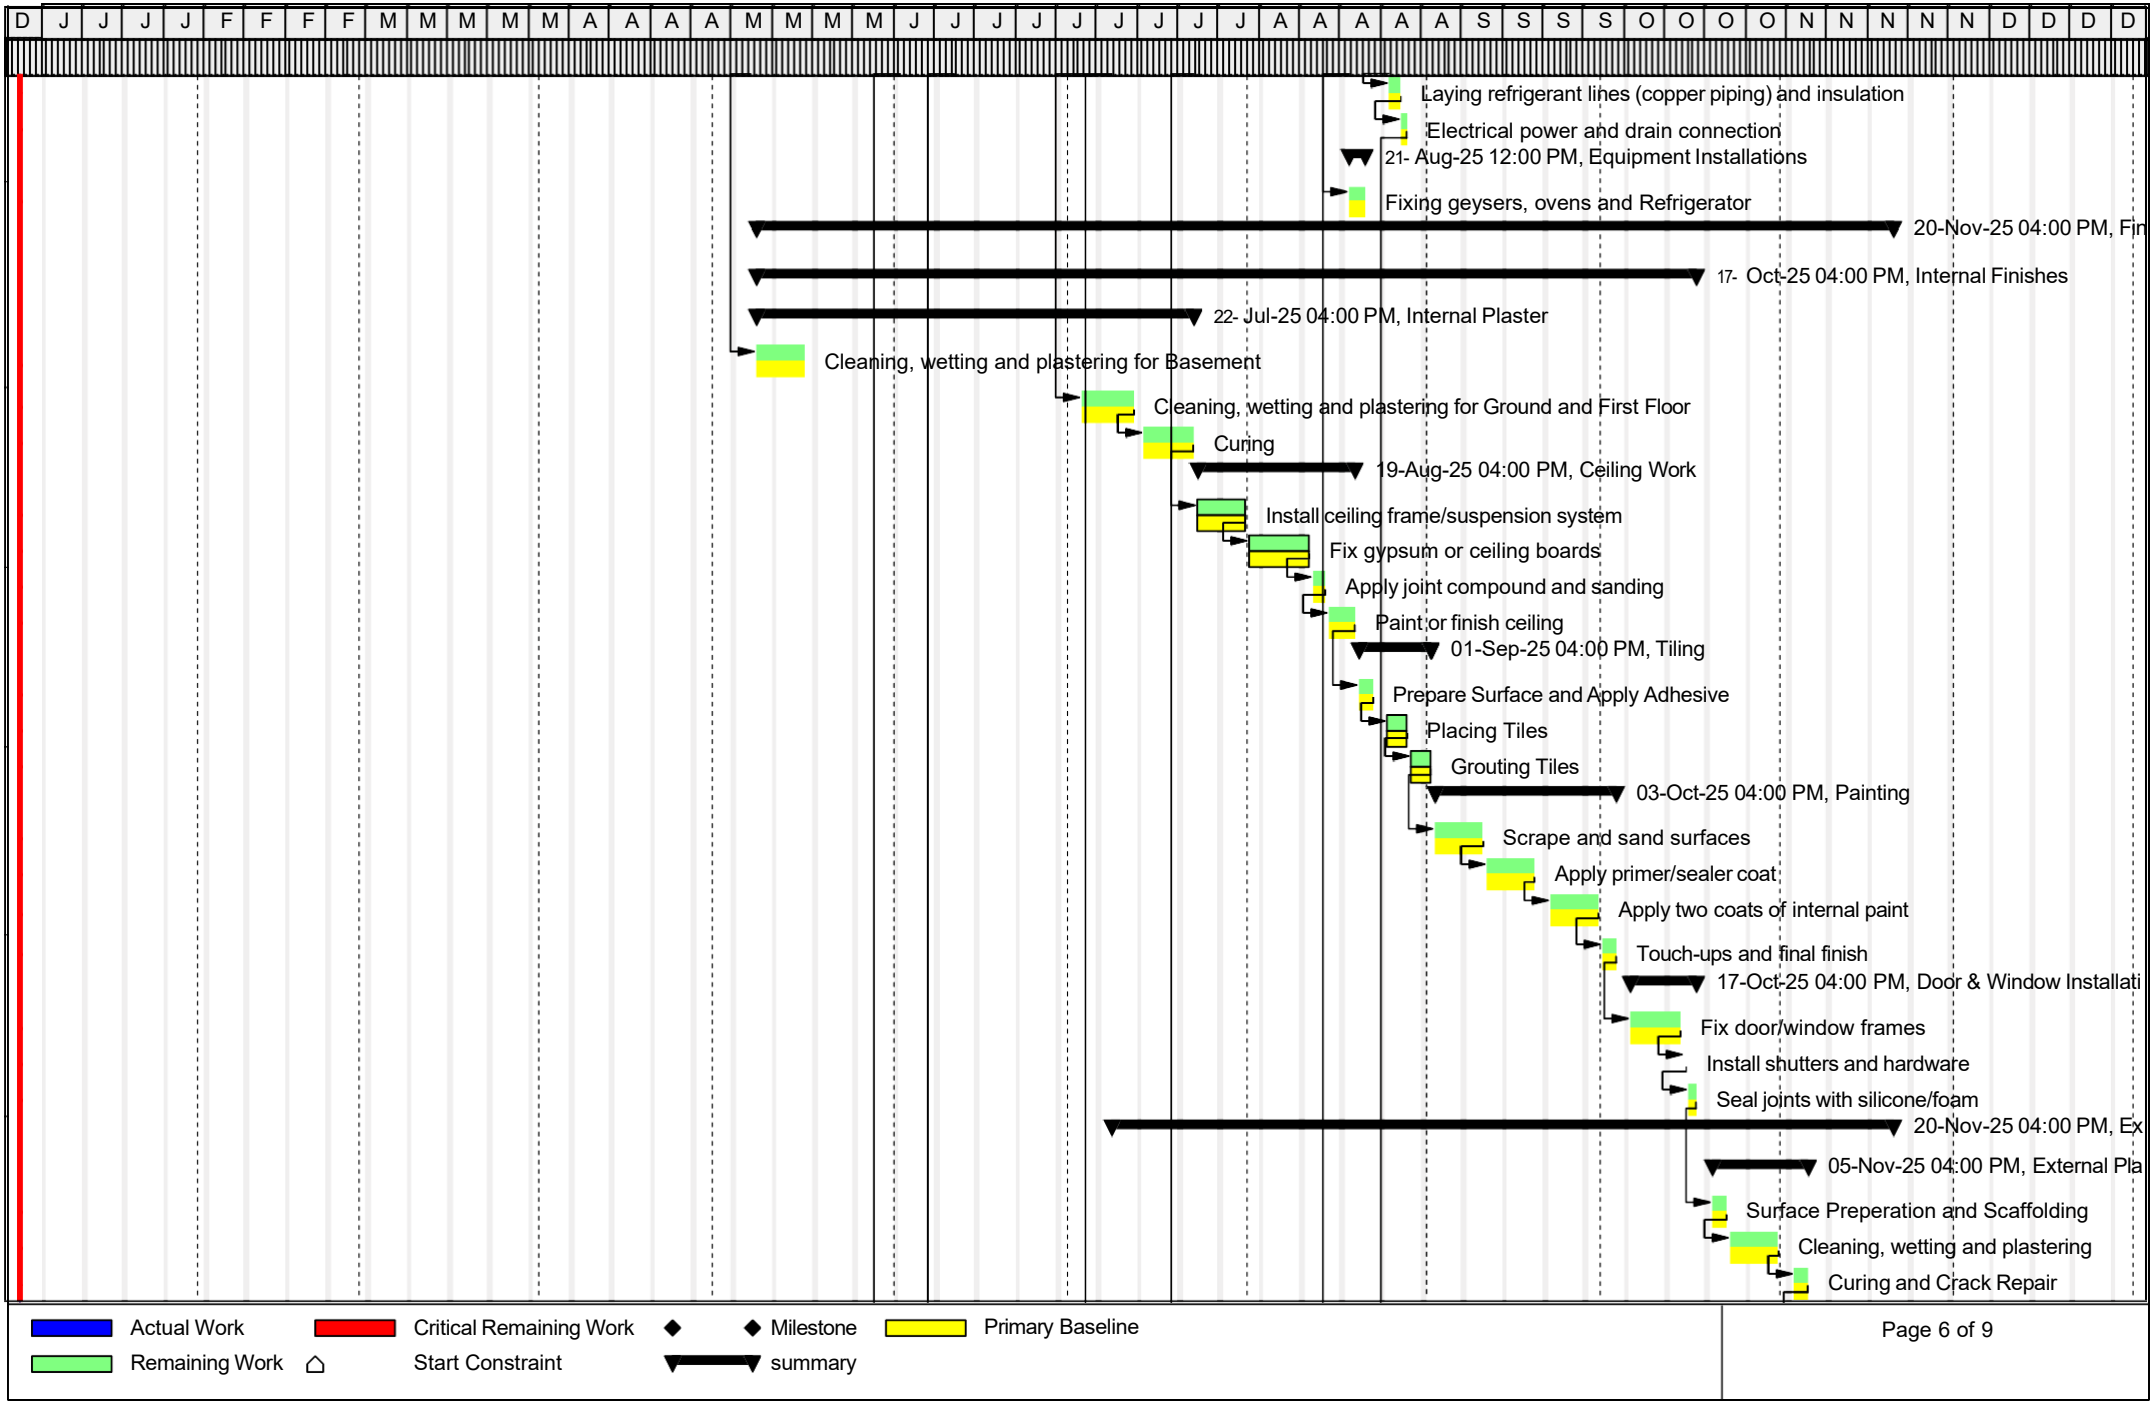
D J J J J F F F F M M M M M A A A A M M M M J J J J J J J J A A A A A S S S S O O O O N N N N D D D D
Laying refrigerant lines (copper piping) and insulation
Electrical power and drain connection
21- Aug-25 12:00 PM, Equipment Installations
Fixing geysers, ovens and Refrigerator
20-Nov-25 04:00 PM, Fin
17- Oct-25 04:00 PM, Internal Finishes
22- Jul-25 04:00 PM, Internal Plaster
Cleaning, wetting and plastering for Basement
Cleaning, wetting and plastering for Ground and First Floor
Curing
19-Aug-25 04:00 PM, Ceiling Work
Install ceiling frame/suspension system
Fix gypsum or ceiling boards
Apply joint compound and sanding
Paint or finish ceiling
01-Sep-25 04:00 PM, Tiling
Prepare Surface and Apply Adhesive
Placing Tiles
Grouting Tiles
03-Oct-25 04:00 PM, Painting
Scrape and sand surfaces
Apply primer/sealer coat
Apply two coats of internal paint
Touch-ups and final finish
17-Oct-25 04:00 PM, Door & Window Installati
Fix door/window frames
Install shutters and hardware
Seal joints with silicone/foam
20-Nov-25 04:00 PM, Ex
05-Nov-25 04:00 PM, External Pla
Surface Preperation and Scaffolding
Cleaning, wetting and plastering
Curing and Crack Repair
Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

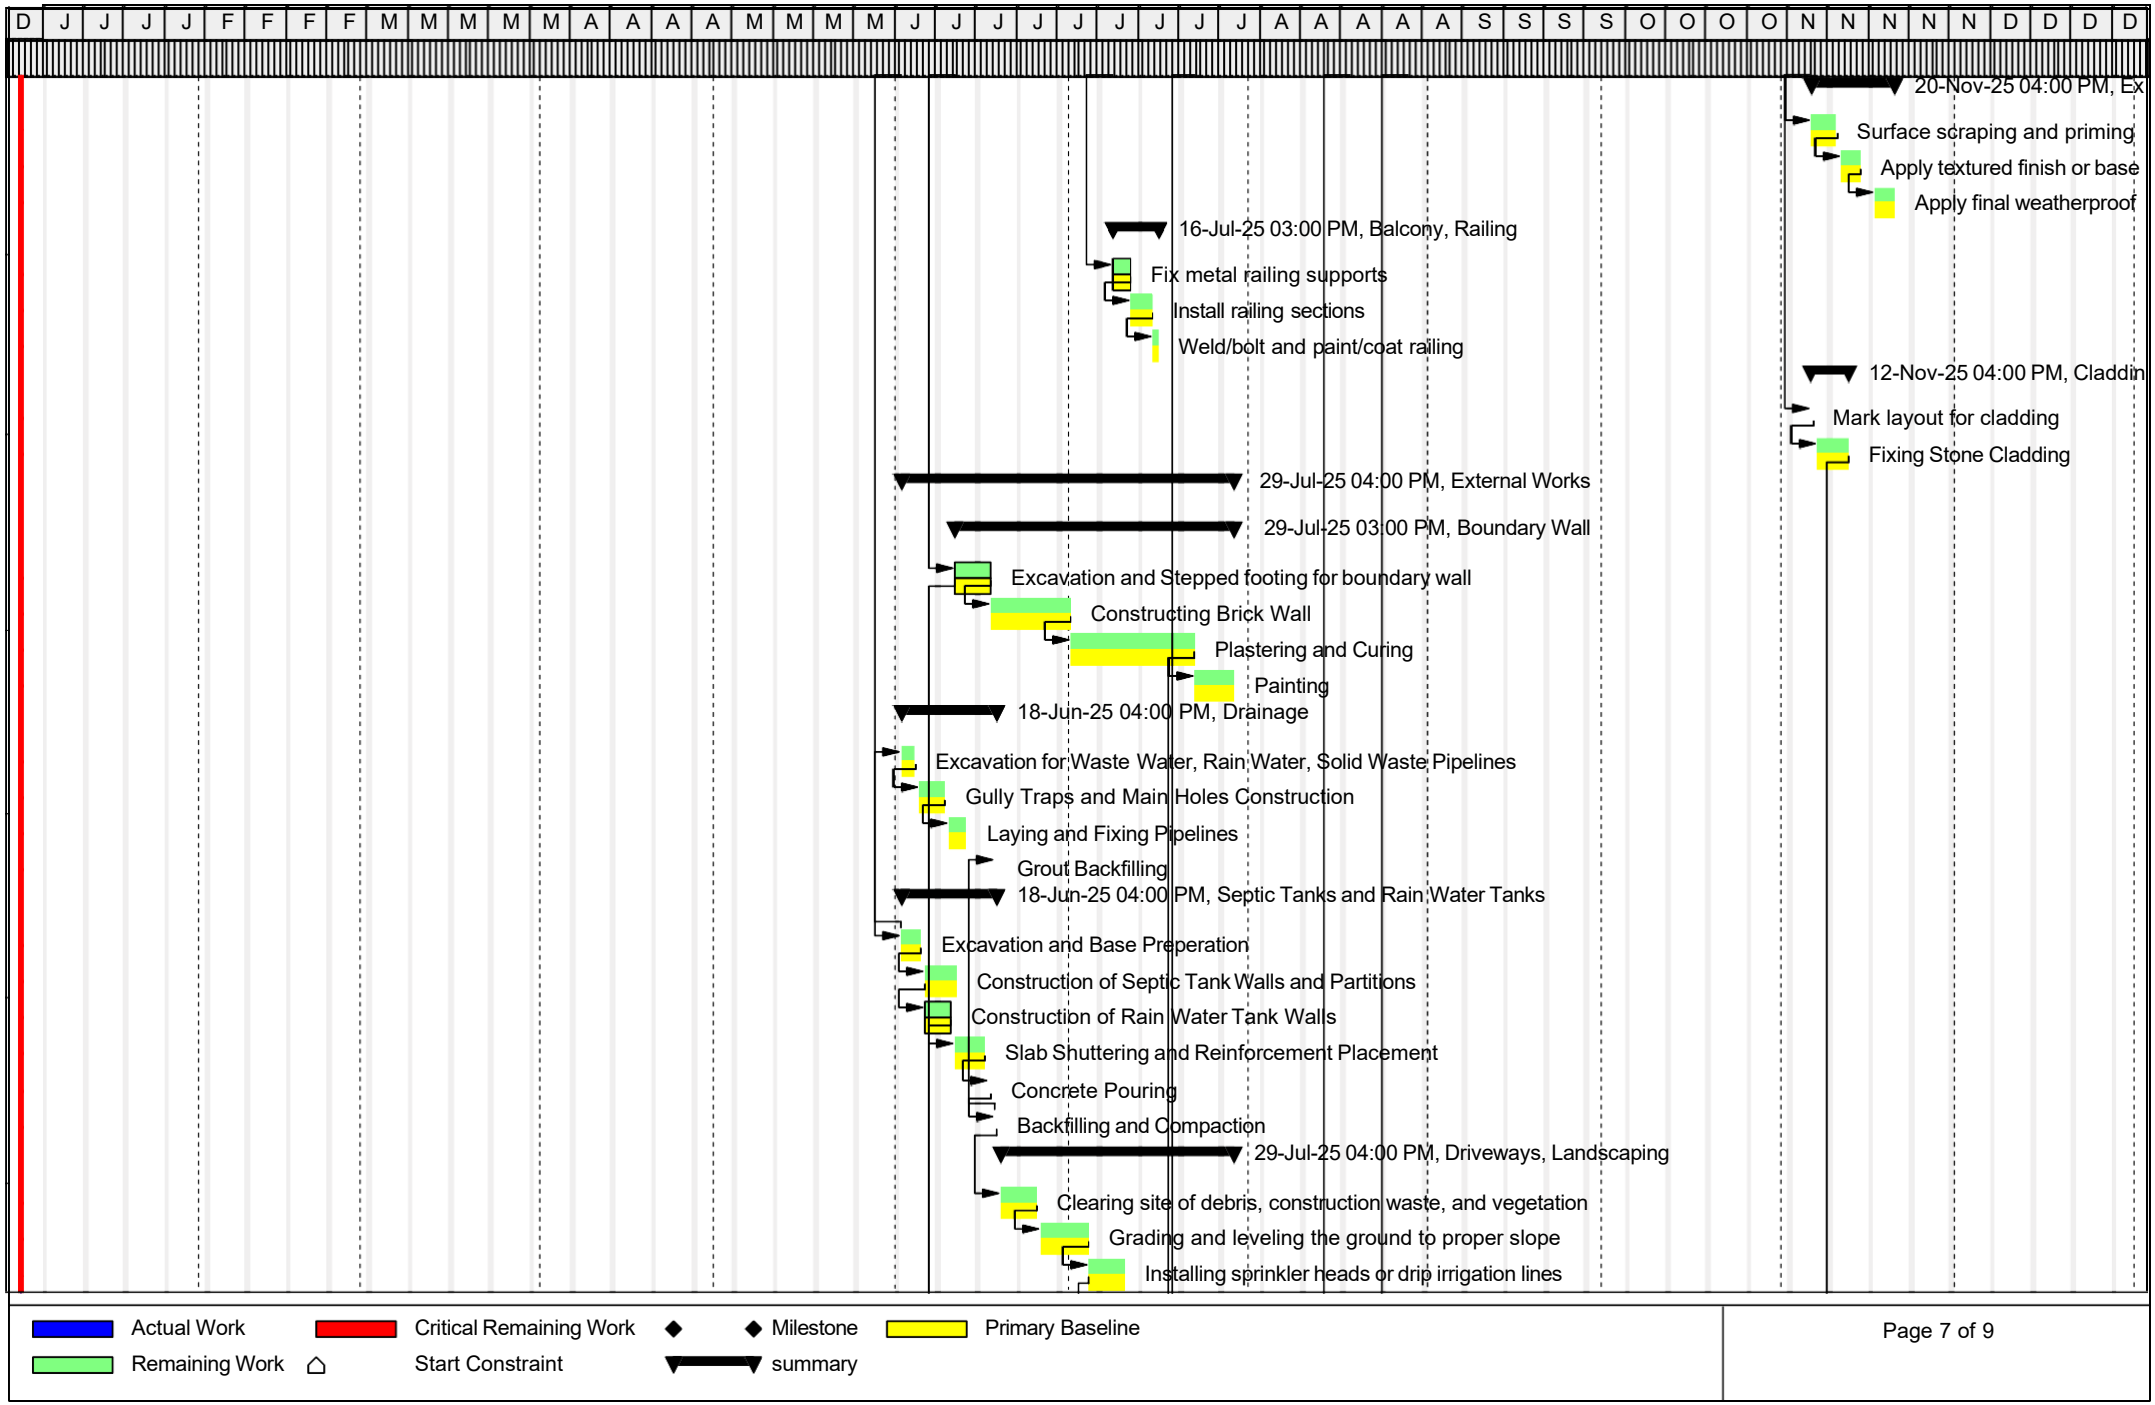
D J J J J F F F F M M M M M A A A A M M M M J J J J J J J J A A A A A S S S S O O O O N N N N N D D D D
20-Nov-25 04:00 PM, Ex
Surface scraping and priming
Apply textured finish or base
Apply final weatherproof
16-Jul-25 03:00 PM, Balcony, Railing
Fix metal railing supports
Install railing sections
Weld/bolt and paint/coat railing
12-Nov-25 04:00 PM, Claddin
Mark layout for cladding
Fixing Stone Cladding
29-Jul-25 04:00 PM, External Works
29-Jul-25 03:00 PM, Boundary Wall
Excavation and Stepped footing for boundary wall
Constructing Brick Wall
Plastering and Curing
Painting
18-Jun-25 04:00 PM, Drainage
Excavation for Waste Water, Rain Water, Solid Waste Pipelines
Gully Traps and Main Holes Construction
Laying and Fixing Pipelines
Grout Backfilling
18-Jun-25 04:00 PM, Septic Tanks and Rain Water Tanks
Excavation and Base Preperation
Construction of Septic Tank Walls and Partitions
Construction of Rain Water Tank Walls
Slab Shuttering and Reinforcement Placement
Concrete Pouring
Backfilling and Compaction
29-Jul-25 04:00 PM, Driveways, Landscaping
Clearing site of debris, construction waste, and vegetation
Grading and leveling the ground to proper slope
Installing sprinkler heads or drip irrigation lines
Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline



Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

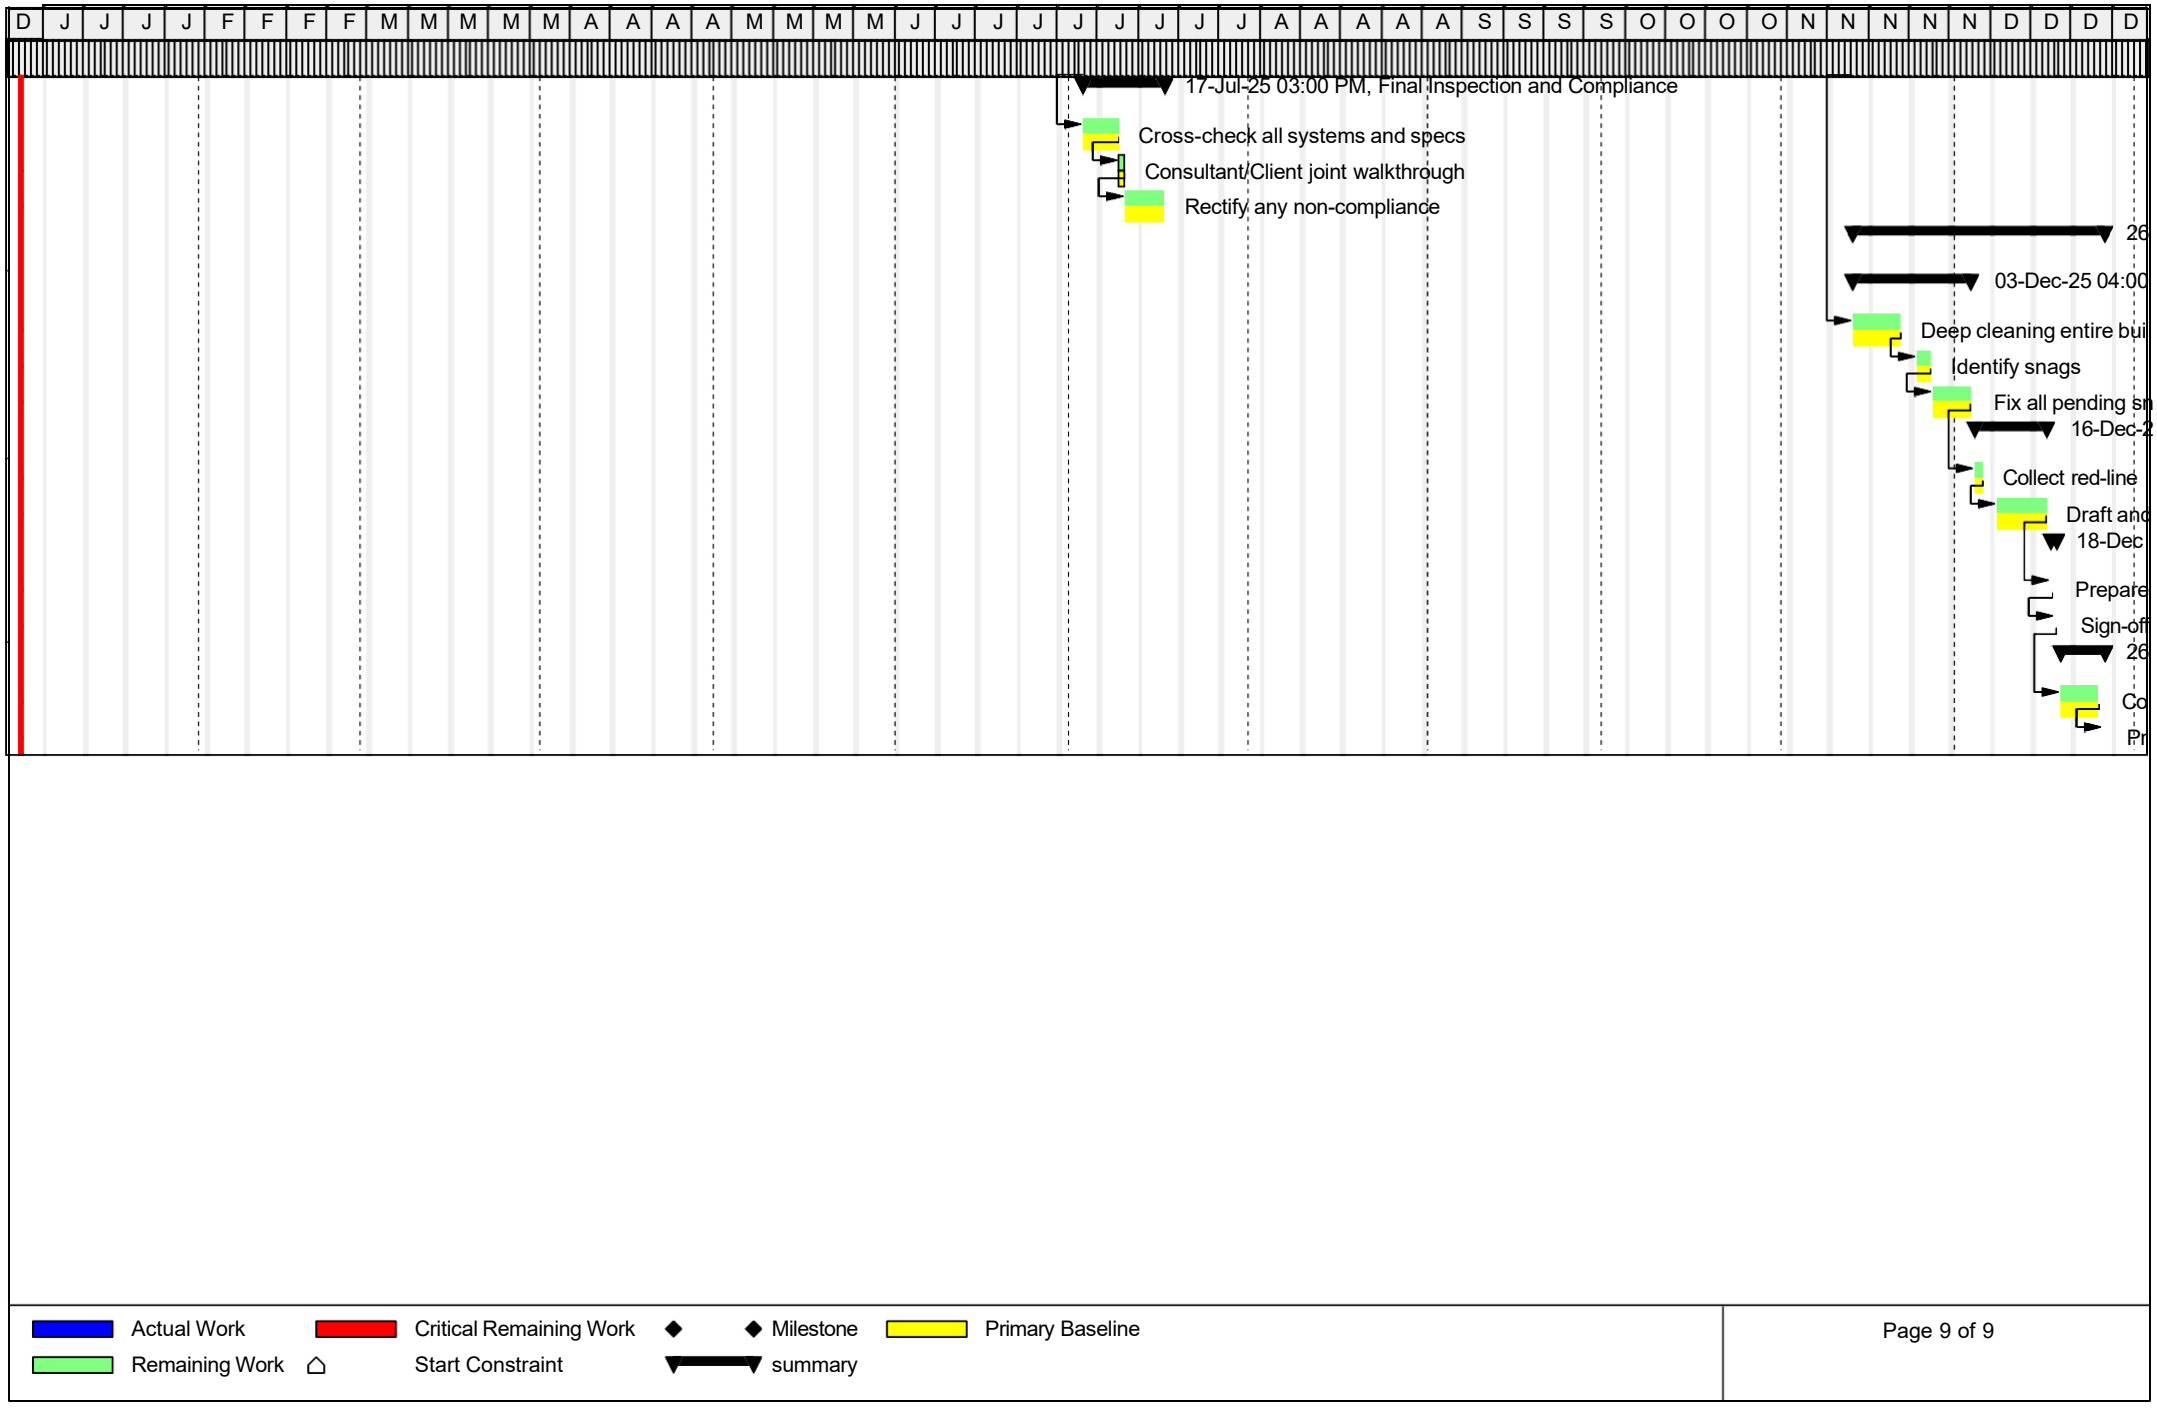


Figure 7 Gantt Chart Reports

ACTIVITY LIST AND DURATION

Activity ID	Activity Name	Predecessors	Original Duration	Start	Finish
TRICON VILLA			305	01-Jan-2508:00AM A	06-Jan-2604:00PM
Pre-Construction Phase			40	01-Jan-2508:00AM A	25-Feb-2504:00 PMA
Site Survey and Soil Investigation			18	01-Jan-2508:00AM A	23-Jan-2504:00PMA
A1000	Topographic survey		5	01-Jan-2508:00AM A	07-Jan-2504:00PMA
A1010	Boreholedrillingandsampling	A1000	2	08-Jan-2508:00AM A	09-Jan-2504:00PMA
A1020	Soil labtesting	A1010	7	10-Jan-2508:00AM A	22-Jan-2504:00PMA
A1030	Geotechnical reportpreparation	A1020	2	23-Jan-2508:00AM A	23-Jan-2504:00PMA
Design Approvals			22	24-Jan-2508:00AM A	17-Feb-2504:00 PMA
A1040	Drawingpreparation	A1030	7	24-Jan-2508:00AM A	04-Feb-2504:00 PMA
A1050	Submissionto local authority	A1040	7	05-Feb-2508:00AM A	13-Feb-2504:00 PMA
A1060	Revisions andapproval follow-up	A1050	7	14-Feb-2508:00AM A	17-Feb-2504:00 PMA
Site Setup			6	18-Feb-2508:00AM A	25-Feb-2504:00 PMA
A1070	Mobilization	A1060	2	18-Feb-2508:00AM A	19-Feb-2504:00 PMA
A1080	Clearingandleveling	A1070	2	20-Feb-2508:00AM A	21-Feb-2504:00 PMA
A1090	Utility setup(temporary water/electricity)	A1080	1	24-Feb-2508:00AM A	24-Feb-2504:00 PMA
A1100	Safety measures and signage	A1090	1	25-Feb-2508:00AM A	25-Feb-2504:00 PMA
Substructure			75	26-Feb-2508:00AM A	30-May-2508:00AM A
Excavation			11	26-Feb-2508:00AM A	10-Mar-25 04:00 PMA
A1110	BasementExcavation	A1100	10	26-Feb-2508:00AM A	07-Mar-25 04:00 PMA
A1120	SwimmingPool Excavation	A1110	1	08-Mar-2508:00AM A	10-Mar-25 04:00 PMA
A1130	IsolatedFooting Excavation	A1120	1	08-Mar-2508:00AM A	10-Mar-25 04:00 PMA
Reinforcement and Shuttering Works For Raft and Isolated Footing			11	03-Mar-2508:00AM A	19-Mar-25 04:00 PMA
A1140	Layoutmarking	A1130	1	10-Mar-2508:00AM A	10-Mar-25 04:00 PMA
A1150	Cuttingandbendingsteel	A1110	4	03-Mar-2508:00AM A	06-Mar-25 04:00 PMA
A1160	Shuttering/formwork installation	A1140	1	11-Mar-2512:00PMA	12-Mar-25 12:00 PMA
A1170	ReinforcementPlacement	A1150,A1140	7	13-Mar-2508:00AM A	19-Mar-25 04:00 PMA
Concrete Works For Raft			21	11-Mar-2508:29AMA	14-Apr-2505:00PMA
A1180	PCC BeforeLayingRaft	A1110	1	11-Mar-2508:29AMA	12-Mar-25 08:29AM A
A1190	Raft Concreting	A1170,A1180	1	20-Mar-2508:40AM A	21-Mar-25 08:40AM A
A1200	Curing	A1190	14	22-Mar-2508:00AM A	10-Apr-2504:00PMA
A1205	Strippingof Formwork	A1200	1	11-Apr-2507:00AMA	14-Apr-2505:00PMA
Reinforcement and Shuttering Works for RCC Walls and Columns			15	20-Mar-2508:00AM A	03-Apr-2504:00PMA
A1210	Layoutmarking	A1190	1	20-Mar-2508:00AM A	20-Mar-25 04:00 PMA
A1220	Cuttingandbendingsteel	A1200	4	24-Mar-2508:00AM A	27-Mar-25 04:00 PMA
A1230	ReifocementPlacement	A1220	5	27-Mar-2508:00AM A	02-Apr-2504:00PMA
A1240	Shuttering/formwork installation	A1230	2	02-Apr-2508:00AM A	03-Apr-2504:00PMA
Concrete Works For RCC Walls and Columns			9	04-Apr-2508:00AM A	19-Apr-2508:00AM A
A1250	ConcretePouring	A1240	1	04-Apr-2508:00AM A	04-Apr-2504:00PMA
A1260	Curing	A1250	7	05-Apr-2508:00AM A	15-Apr-2504:00PMA
A1361	Strippingof Formwork	A1260	1	18-Apr-2508:00AM A	19-Apr-2508:00AM A
Basement Slab			20	05-Apr-2508:00AM A	09-May-2508:00AM A
A1262	ShutteringandFormwork	A1361	5	15-Apr-2508:00AM A	19-Apr-2508:00AM A
A1263	Cuttingandbendingsteel	A1260	2	05-Apr-2508:00AM A	08-Apr-2506:00PMA
A1264	ReinforcementPlacement	A1263	5	09-Apr-2508:00AM A	18- Apr-2505:00PMA
A1265	ConcretePouring	A1264	1	19-Apr-2508:00AM A	21-Apr-2508:00AM A
A1266	Curing	A1265	14	22-Apr-2508:00AM A	09-May-2508:00AM A
A1267	Strippingof Formwork	A1266	1	06-May-2508:00AM A	07-May-2508:00AM A
Backfilling and Compaction			5	08-May-2508:00AM A	14-May-2512:00 PMA
A1270	Earthfillingin layers	A1267	3	08-May-2508:00AM A	12-May-2504:00 PMA
A1280	Mechanical compaction	A1270	3	08-May-2512:00PMA	13-May-2512:00 PMA
A1290	Leveling	A1280	1	13-May-2512:00PMA	14-May-2512:00 PMA
Plinth Beam			13	15-May-2508:00AM A	30-May-2508:00AM A
A1320	CuttingandBendingsteel bars	A1270	3	15-May-2508:00AM A	19- May-2504:00 PMA
A1325	ShutteringandReinforcementPlacement	A1320	1	19-May-2504:00PMA	20- May-2504:00 PMA
A1330	Concretepouring	A1325	1	21-May-2508:00AM A	21- May-2504:00 PMA
A1332	Curing	A1330	7	22-May-2508:00AM A	30-May-2508:00AM A
A1336	Strippingof Formwork	A1332	1	29-May-2508:00AM A	30-May-2508:00AM A
Superstructure			47	21-May-2508:00AM A	17-Jul-2504:00PM
Ground Floor			26	21-May-2508:00AM A	23-Jun-2504:00PM
Column Shuttering and Reinforcement			7	21-May-2508:00AM A	28-May-2504:00 PMA
A1340	Column Marking	A1330	1	22-May-2508:00AM A	22- May-2504:00 PMA
A1345	CuttingandBending Steel	A1330	3	21-May-2508:00AM A	24-May-2508:00AM A
A1350	ReinforcementPlacementand Shuttering	A1345	3	24-May-2508:00AM A	28-May-2504:00 PMA
Beam and Slab Shuttering and Reinforcement			8	30-May-2508:00AM	11-Jun-2504:00PM
A1360	Beam Level Marking	A1410	1	30-May-2508:00AM	30-May-2504:00 PM
A1370	Shuttering Placement	A1360	3	02-Jun-2508:00AM	04-Jun-2504:00PM
A1375	CuttingandBending Steel	A1360	2	30-May-2508:00AM	02-Jun-2508:00AM
A1380	ReinforcementPlacement	A1375	4	02-Jun-2508:00AM	05-Jun-2504:00PM

Activity ID	Activity Name	Predecessors	Original Duration	Start	Finish
A1385	Strippingof Formwork	A1424	1	10-Jun-2504:00PM	11-Jun-2504:00PM
Staircase Construction			8	30-May-2508:00AM	11-Jun-2504:00PM
A1390	Staircase Marking	A1360	1	30-May-2508:00AM	30-May-2504:00 PM
A1395	CuttingandBending Steel	A1375	1	30-May-2508:00AM	31-May-2508:00AM
A1400	Reinforcement Placementand Shuttering	A1380	1	02-Jun-2508:00AM	02-Jun-2504:00PM
A1405	Strippingof Formwork	A1385	1	10-Jun-2504:00PM	11-Jun-2504:00PM
Concrete Works			19	29-May-2508:00AM	23-Jun-2504:00PM
A1410	Column Concrete Pouring	A1350	1	29-May-2508:00AM	29-May-2504:00 PM
A1420	Staircase, Beam and Slab Poring	A1400	1	03-Jun-2508:00AM	03-Jun-2504:00PM
A1424	Curing Column	A1410	7	29-May-2504:00 PM	10-Jun-2504:00PM
A1428	Curing Slab	A1420	14	03-Jun-2504:00PM	23-Jun-2504:00PM
Brick Work			7	12-Jun-2508:00AM	20-Jun-2504:00PM
A1430	External Walls Construction	A1385	6	12-Jun-2508:00AM	19-Jun-2504:00PM
A1440	Internal Wall Construction	A1430	7	12-Jun-2508:00AM	20-Jun-2504:00PM
First Floor			35	04-Jun-2508:00AM	17-Jul-2504:00PM
Column Shuttering and Reinforcement)			9	04-Jun-2508:00AM	17-Jun-2504:00PM
A1450	Column Marking	A1420	1	04-Jun-2508:00AM	04-Jun-2504:00PM
A1455	CuttingandBending Steel	A1430	2	12-Jun-2508:00AM	14-Jun-2508:00AM
A1460	ShutteringandReinforcement Placement	A1455	2	16-Jun-2508:00AM	17-Jun-2504:00PM
Beam and Slab Shuttering and Reinforcement			22	12-Jun-2508:00AM	07-Jul-2504:00PM
A1470	Beam Level Marking	A1518	1	19-Jun-2508:00AM	19-Jun-2504:00PM
A1480	Shuttering Placement	A1470	2	20-Jun-2508:00AM	23-Jun-2504:00PM
A1485	CuttingandBending Steel	A1455	2	12-Jun-2508:00AM	14-Jun-2508:00AM
A1490	Reinforcement Placement	A1485	3	16-Jun-2508:00AM	18-Jun-2504:00PM
A1495	Strippingof Formwork	A1528	1	05-Jul-2504:00PM	07-Jul-2504:00PM
Staircase Construction			22	12-Jun-2508:00AM	07-Jul-2504:00PM
A1500	Staircase Marking	A1470	1	19-Jun-2508:00AM	19-Jun-2504:00PM
A1505	CuttingandBending Steel	A1485	1	12-Jun-2508:00AM	13-Jun-2508:00AM
A1510	Reinforcement Placementand Shuttering	A1490	1	16-Jun-2508:00AM	16-Jun-2504:00PM
A1514	Strippingof Formwork	A1495	1	05-Jul-2504:00PM	07-Jul-2504:00PM
Concrete Works			16	17-Jun-2504:00PM	05-Jul-2504:00PM
A1518	Column Concret Pouring	A1460	1	17-Jun-2504:00PM	18-Jun-2504:00PM
A1520	Staircase, Beam and Slab Poring	A1490	1	19-Jun-2508:00AM	19-Jun-2504:00PM
A1524	Curing Column	A1518	5	18-Jun-2504:00PM	24-Jun-2504:00PM
A1528	Curing Slab	A1520	14	19-Jun-2504:00PM	05-Jul-2504:00PM
Brick Work			9	08-Jul-2508:00AM	17-Jul-2504:00PM
A1530	External Walls Construction	A1514	4	08-Jul-2508:00AM	11-Jul-25 04:00 PM
A1540	Internal Wall Construction	A1530	5	08-Jul-2508:00AM	14-Jul-2504:00PM
A1545	Parapet Wall Construction	A1540	3	14-Jul-2504:00PM	17-Jul-2504:00PM
MEP Works (Mechanical, Electrical, Plumbing)			117	18-Apr-2508:00AM A	08-Sep-25 12:00 PM
Electrical			107	18-Apr-2508:00AM A	27-Aug-25 12:00 PM
Conduit Laying			79	18-Apr-2508:00AM A	23- Jul-2504:00PM
A1550	Markingroutes and Cuttingchases	A1540	7	15-Jul-2508:00AM	23-Jul-2504:00PM
A1560	Laying and FiixingofPVC conduits in Basement Slab	A1264	1	18-Apr-2508:00AM A	18-Apr-2504:00PMA
A1563	Laying and FiixingofPVC conduits in GroundFloor Slab	A1380	1	02-Jun-2504:00PM	03-Jun-2504:00PM
A1566	Laying and FiixingofPVC conduits in First Floor Slab	A1490	1	16-Jun-2504:00PM	17-Jun-2504:00PM
A1569	Laying and FiixingofPVC conduits in Walls	A1540	1	14-Jul-2504:00PM	15-Jul-2504:00PM
A1570	Fixingjunctionboxes andswitchboxes	A1569	2	16-Jul-2508:00AM	17-Jul-2504:00PM
A1580	Inspectionbeforeplasteringor slabcasting	A1570	2	18-Jul-2508:00AM	21-Jul-2504:00PM
Wiring and Cabling			10	22-Jul-2508:00AM	04-Aug-25 12:00 PM
A1590	Pullingwires throughconduits	A1580	8	22-Jul-2508:00AM	31-Jul-2504:00PM
A1600	Terminatingwires inswitchboxes and DBs	A1590	1	01-Aug-2508:00AM	01-Aug-25 04:00 PM
A1610	Segregationoflighting, power, and HVAC wiring	A1600	1	04-Aug-2508:00AM	04-Aug-25 12:00 PM
Distribution Boards and Panel Installations			5	04-Aug-25 12:00 PM	11-Aug-25 12:00 PM
A1620	Mounting DBs andelectrical panels	A1610	2	04-Aug-25 12:00 PM	06-Aug-25 12:00 PM
A1630	Connectingincoming/outgoingwires withMCBs/isolators	A1620	2	06-Aug-25 12:00 PM	08-Aug-25 12:00 PM
A1640	Earthingconnectionandneutral link bar setup	A1630	1	08-Aug-25 12:00 PM	11-Aug-25 12:00 PM
Light Fixtures, Switches, and Sockets			12	11-Aug-25 12:00 PM	27-Aug-25 12:00 PM
A1645	Fixingmodular switches, sockets, dimmers, regulators	A1640	7	11-Aug-25 12:00 PM	20-Aug-25 12:00 PM
A1650	Installation oflights, fans, exhausts	A1645	5	20-Aug-25 12:00 PM	27-Aug-25 12:00 PM
Plumbing			52	29-May-2508:00AM	01-Aug-25 04:00 PM
Drainage Piping			39	29-May-2508:00AM	16-Jul-2504:00PM
A1670	Laying of Waste Water Pipes for Basement	A1336	3	29-May-2508:00AM	02-Jun-2504:00PM
A1673	Laying of Main andBackwashDraininglinefor Swimmingpool	A1670	1	29-May-2508:00AM	30-May-2508:00AM
A1676	Settingand Fixing Pipes, traps, gully chambers, andfloor drains for Basement	A1673	1	30-May-2508:00AM	31-May-2508:00AM
A1679	Laying of Main Drain and Wastwater Pipes for Ground Floor	A1440	2	20-Jun-2504:00PM	23-Jun-2504:00PM
A1680	Settingand Fixing Pipes, traps, gully chambers, andfloor drains for Ground Floor	A1679	2	23-Jun-2508:00AM	24-Jun-2504:00PM
A1684	Laying of Main Drain and Wastwater Pipes for First Floor	A1540	2	14-Jul-2504:00PM	16-Jul-2504:00PM
A1688	Settingand Fixing Pipes, traps, gully chambers, andfloor drains for Firstand Roof Floor	A1684	2	14-Jul-2504:00PM	16-Jul-2504:00PM
A1690	Providing sleeves throughslabs/walls	A1676	2	30-May-2508:00AM	02-Jun-2504:00PM
Water Supply Lines			8	14-Jul-2504:00PM	23-Jul-2504:00PM
A1695	Installation of Cold/hot Water pipelines for Swimming Pool andBasement	A1540	2	14-Jul-2504:00PM	16-Jul-2504:00PM
A1700	Installation ofcold/hotwater PPR pipelines andelbows, tees, valves, andpressurereducers	A1695	7	15-Jul-2508:00AM	23-Jul-2504:00PM
A1710	Fixingand Routing pipes, from tanks to Bathroom/Kitchen	A1700	3	15-Jul-2508:00AM	17-Jul-2504:00PM
Installation of Sanitary Fixtures			10	18-Jul-2508:00AM	31-Jul-2504:00PM

Activity ID	Activity Name	Predecessors	Original Duration	Start	Finish
A1720	Installation of WC, washbasins, urinals, sinks	A1710	5	18-Jul-25 08:00AM	24-Jul-25 04:00PM
A1730	Connecting fixtures to drainage and water supply	A1720	2	25-Jul-25 08:00AM	28-Jul-25 04:00PM
A1740	Fixing brackets, flexible hoses, bottle traps	A1730	3	29-Jul-25 08:00AM	31-Jul-25 04:00PM
Underground and Overhead Water Tanks			49	02-Jun-25 08:00AM	01-Aug-25 04:00 PM
A1750	Excavation and PCC for Underground Water Tanks	A1450	2	05-Jun-25 08:00AM	06-Jun-25 04:00PM
A1760	Cutting and Bending Steel	A1450	3	02-Jun-25 08:00AM	09-Jun-25 08:00AM
A1765	Reinforcement Placement and Formwork Installation	A1760	3	09-Jun-25 08:00AM	11-Jun-25 04:00 PM
A1770	Casting walls of Underground Water Tank	A1765	1	12-Jun-25 08:00AM	12-Jun-25 04:00PM
A1774	Slab Shuttering and Reinforcement Placement	A1765	2	11-Jun-25 04:00 PM	13-Jun-25 04:00PM
A1778	Slab Casting	A1774	1	13-Jun-25 04:00PM	14-Jun-25 04:00PM
A1780	Reifocement Placement and Forwork Installation for Overhead Water Tank Walls	A1545	4	18-Jul-25 08:00AM	23-Jul-25 04:00PM
A1790	Casting Walls of Overhead Water Tank	A1780	1	23-Jul-25 04:00PM	24-Jul-25 04:00PM
A1800	Slab Shuttering, Reinforcement Placement and Slab Casting	A1790	3	24-Jul-25 04:00PM	29-Jul-25 04:00PM
A1810	Stripping of Formworks	A1800	1	29-Jul-25 04:00PM	30-Jul-25 04:00PM
A1815	Pipe connections, float valve, inlet/outlet	A1810	2	31-Jul-25 08:00AM	01-Aug-25 04:00 PM
Mechanical			8	27-Aug-25 12:00 PM	08-Sep-25 12:00 PM
AC Installation			8	27-Aug-25 12:00 PM	08-Sep-25 12:00 PM
A1820	Marking and cutting wall openings for indoor units	A1650	3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM
A1830	Mounting indoor and outdoor units	A1820	2	01-Sep-25 12:00 PM	03-Sep-25 12:00 PM
A1840	Laying refrigerant lines (copper piping) and insulation	A1830	2	03-Sep-25 12:00 PM	05-Sep-25 12:00 PM
A1850	Electrical power and drain connection	A1840	1	05-Sep-25 12:00 PM	08-Sep-25 12:00 PM
Equipment Installations			3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM
A1860	Fixing geysers, ovens and Refrigerator	A1820	3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM
Finishing Works			169	08-May-25 08:00AM A	01-Dec-25 04:00 PM
Internal Finishes			140	08-May-25 08:00AM A	28-Oct-25 04:00PM
Internal Plaster			66	08-May-25 08:00AM A	31-Jul-25 04:00PM
A1870	Cleaning, wetting and plastering for Basement	A1267	7	08-May-25 08:00AM A	16-May-25 04:00 PMA
A1875	Cleaning, wetting and plastering for Ground and First Floor	A1545	8	12-Jul-25 04:00PM	22-Jul-25 04:00PM
A1880	Curing	A1875	7	23-Jul-25 08:00AM	31-Jul-25 04:00PM
Ceiling Work			20	01-Aug-25 08:00AM	28-Aug-25 04:00 PM
A1890	Install ceiling frame/suspension system	A1880	7	01-Aug-25 08:00AM	11-Aug-25 04:00 PM
A1900	Fix gypsum or ceiling boards	A1890	7	12-Aug-25 08:00AM	20-Aug-25 04:00 PM
A1910	Apply joint compound and sanding	A1900	3	21-Aug-25 08:00AM	25-Aug-25 04:00 PM
A1920	Paint or finish ceiling	A1910	3	26-Aug-25 08:00AM	28-Aug-25 04:00 PM
Tiling			9	29-Aug-25 08:00AM	10-Sep-25 04:00 PM
A1930	Prepare Surface and Apply Adhesive	A1920	3	29-Aug-25 08:00AM	02-Sep-25 04:00 PM
A1940	Placing Tiles	A1930	4	03-Sep-25 08:00AM	08-Sep-25 04:00 PM
A1950	Grouting Tiles	A1940	2	09-Sep-25 08:00AM	10-Sep-25 04:00 PM
Painting			24	11-Sep-25 08:00AM	14-Oct-25 04:00PM
A1960	Scrape and sand surfaces	A1950	7	11-Sep-25 08:00AM	19-Sep-25 04:00 PM
A1970	Apply primer/sealer coat	A1960	7	22-Sep-25 08:00AM	30-Sep-25 04:00 PM
A1980	Apply two coats of internal paint	A1970	7	01-Oct-25 08:00AM	09-Oct-25 04:00PM
A1990	Touch-ups and final finish	A1980	3	10-Oct-25 08:00AM	14-Oct-25 04:00PM
Door & Window Installation			10	15-Oct-25 08:00AM	28-Oct-25 04:00PM
A2000	Fix door/window frames	A1990	7	15-Oct-25 08:00AM	23-Oct-25 04:00PM
A2010	Install shutters and hardware	A2000	1	24-Oct-25 08:00AM	24-Oct-25 04:00PM
A2020	Seal joints with silicone/foam	A2010	2	27-Oct-25 08:00AM	28-Oct-25 04:00PM
External Finishes			97	18-Jul-25 08:00AM	01-Dec-25 04:00 PM
External Plaster			13	29-Oct-25 08:00AM	14-Nov-25 04:00 PM
A2030	Surface Preperation and Scaffolding	A2020	3	29-Oct-25 08:00AM	31-Oct-25 04:00PM
A2040	Cleaning, wetting and plastering	A2030	7	03-Nov-25 08:00AM	11-Nov-25 04:00 PM
A2050	Curing and Crack Repair	A2040	3	12-Nov-25 08:00AM	14-Nov-25 04:00 PM
Exterior Paint/Texture			11	17-Nov-25 08:00AM	01-Dec-25 04:00 PM
A2060	Surface scraping and priming	A2050	3	17-Nov-25 08:00AM	19-Nov-25 04:00 PM
A2070	Apply textured finish or base coat	A2060	4	20-Nov-25 08:00AM	25-Nov-25 04:00 PM
A2080	Apply final weatherproof paint coat	A2070	4	26-Nov-25 08:00AM	01-Dec-25 04:00 PM
Balcony, Railing			6	18-Jul-25 08:00AM	25-Jul-25 04:00PM
A2090	Fix metal railing supports	A1545	3	18-Jul-25 08:00AM	22-Jul-25 04:00PM
A2100	Install railing sections	A2090	2	23-Jul-25 08:00AM	24-Jul-25 04:00PM
A2110	Weld/bolt and paint/coat railing	A2100	1	25-Jul-25 08:00AM	25-Jul-25 04:00PM
Cladding and Special Finishes			5	17-Nov-25 08:00AM	21-Nov-25 04:00 PM
A2120	Mark layout for cladding	A2050	1	17-Nov-25 08:00AM	17-Nov-25 04:00 PM
A2130	Fixing Stone Cladding	A2120	4	18-Nov-25 08:00AM	21-Nov-25 04:00 PM
External Works			51	05-Jun-25 08:00AM	07-Aug-25 04:00 PM
Boundary Wall			34	23-Jun-25 08:00AM	07-Aug-25 04:00 PM
A2140	Excavation and Stepped footing for boundary wall	A1440	4	23-Jun-25 08:00AM	26-Jun-25 04:00PM
A2150	Constructing Brick Wall	A2140	10	27-Jun-25 08:00AM	10-Jul-25 04:00PM
A2160	Plastering and Curing	A2150	15	11-Jul-25 08:00 AM	31-Jul-25 04:00PM
A2170	Painting	A2160	5	01-Aug-25 08:00AM	07-Aug-25 04:00 PM
Drainage			13	05-Jun-25 08:00AM	23-Jun-25 04:00PM
A2180	Excavation for Waste Water, Rain Water, Solid Waste Pipelines	A2220	3	05-Jun-25 08:00AM	09-Jun-25 04:00PM
A2190	Gully Traps and Main Holes Construction	A2180	3	10-Jun-25 08:00AM	12-Jun-25 04:00PM
A2200	Laying and Fixing Pipelines	A2190	4	13-Jun-25 08:00AM	18-Jun-25 04:00PM

Activity ID	Activity Name	Predecessors	Original Duration	Start	Finish
A2210	Grout Backfilling	A2270	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM
Septic Tanks and Rain Water Tanks			13	05-Jun-25 08:00 AM	23-Jun-25 04:00 PM
A2220	Excavation and Base Preperation	A1750	4	05-Jun-25 08:00 AM	10-Jun-25 04:00 PM
A2230	Construction of Septic Tank Walls and Partitions	A2220	4	11-Jun-25 08:00 AM	16-Jun-25 04:00 PM
A2240	Construction of Rain Water Tank Walls	A2230	3	11-Jun-25 08:00 AM	13-Jun-25 04:00 PM
A2250	Slab Shuttering and Reinforcement Placement	A2240	4	16-Jun-25 08:00 AM	19-Jun-25 04:00 PM
A2260	Concrete Pouring	A2250	1	20-Jun-25 08:00 AM	20-Jun-25 04:00 PM
A2270	Backfilling and Compaction	A2260	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM
Driveways, Landscaping			33	24-Jun-25 08:00 AM	01-Aug-25 04:00 PM
A2280	Clearing site of debris, construction waste, and vegetation	A2270	5	24-Jun-25 08:00 AM	30-Jun-25 04:00 PM
A2290	Grading and leveling the ground to proper slope	A2280	7	01-Jul-25 08:00 AM	09-Jul-25 04:00 PM
A2300	Installing sprinkler heads or drip irrigation lines	A2290	5	09-Jul-25 04:00 PM	15-Jul-25 04:00 PM
A2310	Laying underground cables for lights	A2300	4	10-Jul-25 08:00 AM	15-Jul-25 04:00 PM
A2320	Sub-base and compaction for Driveway	A2310	4	16-Jul-25 08:00 AM	21-Jul-25 04:00 PM
A2330	Lay pavers for driveway	A2320	4	22-Jul-25 08:00 AM	25-Jul-25 04:00 PM
A2340	Laying grass turf or sowing grass seeds	A2330	5	28-Jul-25 08:00 AM	01-Aug-25 04:00 PM
Guard Room Construction			11	23-Jun-25 08:00 AM	07-Jul-25 04:00 PM
A2350	Excavation for Stepped Footing	A2140	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM
A2360	Construction of Brickwall	A2350	2	24-Jun-25 08:00 AM	25-Jun-25 04:00 PM
A2370	Slab Shuttering and Reinforcement Placement	A2360	2	26-Jun-25 08:00 AM	27-Jun-25 04:00 PM
A2380	Slab Concrete Pouring	A2370	1	30-Jun-25 08:00 AM	30-Jun-25 04:00 PM
A2390	Internal and External Wall Plastering	A2380	2	01-Jul-25 08:00 AM	02-Jul-25 04:00 PM
A2400	Door and Window Installation	A2390	2	03-Jul-25 08:00 AM	04-Jul-25 04:00 PM
A2410	Installation of Bathroom Fixtures	A2400	1	07-Jul-25 08:00 AM	07-Jul-25 04:00 PM
A2420	Internal and External Painting	A2390	1	03-Jul-25 08:00 AM	03-Jul-25 04:00 PM
Gate and Security Systems			24	04-Jul-25 08:00 AM	06-Aug-25 04:00 PM
A2430	Fabricate and install main gate	A2160	4	01-Aug-25 08:00 AM	06-Aug-25 04:00 PM
A2440	Installation of Security Cameras	A2420	3	04-Jul-25 08:00 AM	08-Jul-25 04:00 PM
A2450	Alarm System Installation	A2440	3	04-Jul-25 08:00 AM	08-Jul-25 04:00 PM
A2460	Access Control System Setup	A2450	2	09-Jul-25 08:00 AM	10-Jul-25 04:00 PM
A2470	Network & Power Setup	A2460	2	11-Jul-25 08:00 AM	14-Jul-25 04:00 PM
Testing and Commissioning			42	15-Jul-25 08:00 AM	10-Sep-25 12:00 PM
Electrical System Testing			3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM
A2480	Continuity and insulation resistance tests	A1650	1	27-Aug-25 12:00 PM	28-Aug-25 12:00 PM
A2490	Test RCDs/MCBs in DBs	A2480	1	28-Aug-25 12:00 PM	29-Aug-25 12:00 PM
A2500	Voltage drop and load testing	A2490	1	29-Aug-25 12:00 PM	01-Sep-25 12:00 PM
Plumbing and Leak Testing			3	04-Aug-25 08:00 AM	06-Aug-25 04:00 PM
A2510	Pressure testing water lines	A1815	1	04-Aug-25 08:00 AM	04-Aug-25 04:00 PM
A2520	Fill and inspect sanitary traps	A2510	1	05-Aug-25 08:00 AM	05-Aug-25 04:00 PM
A2530	Leak detection and sealing	A2520	1	06-Aug-25 08:00 AM	06-Aug-25 04:00 PM
Mechanical Equipment Commissioning			2	08-Sep-25 12:00 PM	10-Sep-25 12:00 PM
A2540	Start-up and trial run of ACs, fans, geysers	A1850	1	08-Sep-25 12:00 PM	09-Sep-25 12:00 PM
A2550	Monitor temperature, current, pressure levels	A2540	1	08-Sep-25 12:00 PM	09-Sep-25 12:00 PM
A2560	Make final tuning and adjustments	A2550	1	09-Sep-25 12:00 PM	10-Sep-25 12:00 PM
Final Inspection and Compliance			10	15-Jul-25 08:00 AM	28-Jul-25 04:00 PM
A2570	Cross-check all systems and specs	A2470	4	15-Jul-25 08:00 AM	18-Jul-25 04:00 PM
A2580	Consultant/Client joint walkthrough	A2570	1	21-Jul-25 08:00 AM	21-Jul-25 04:00 PM
A2590	Rectify any non-compliance	A2580	5	22-Jul-25 08:00 AM	28-Jul-25 04:00 PM
Handover and Documentation			32	24-Nov-25 08:00 AM	06-Jan-26 04:00 PM
Final Cleaning and Snag Rectification			15	24-Nov-25 08:00 AM	12-Dec-25 04:00 PM
A2600	Deep cleaning entire building	A2130	7	24-Nov-25 08:00 AM	02-Dec-25 04:00 PM
A2610	Identify snags	A2600	3	03-Dec-25 08:00 AM	05-Dec-25 04:00 PM
A2620	Fix all pending snags	A2610	5	08-Dec-25 08:00 AM	12-Dec-25 04:00 PM
As-Built Drawings Preparation			9	15-Dec-25 08:00 AM	25-Dec-25 04:00 PM
A2630	Collect red-line markups from site	A2620	2	15-Dec-25 08:00 AM	16-Dec-25 04:00 PM
A2640	Draft and submit as-built drawings to client	A2630	7	17-Dec-25 08:00 AM	25-Dec-25 04:00 PM
Handover to Client			2	26-Dec-25 08:00 AM	29-Dec-25 04:00 PM
A2650	Prepare handover checklist	A2640	1	26-Dec-25 08:00 AM	26-Dec-25 04:00 PM
A2660	Sign-off by client and project team	A2650	1	29-Dec-25 08:00 AM	29-Dec-25 04:00 PM
Warranty Documents and Manuals			6	30-Dec-25 08:00 AM	06-Jan-26 04:00 PM
A2670	Compile warranties, product datasheets	A2660	5	30-Dec-25 08:00 AM	05-Jan-26 04:00 PM
A2680	Provide user manuals and maintenance guides	A2670	1	06-Jan-26 08:00 AM	06-Jan-26 04:00 PM

Figure 8 Activity List Durations

EARN VALUE ANALYSIS

Activity ID	Activity Name	Original Duration	Start	Finish	Activity % Complete	Schedule % Complete	Perf % Complete	EV	AC	PV	BAC	SPI	CPI	Cost Variance	Schedule Variance
TRICON VILLA		305	01-Jan-25 08:00 AM A	06-Jan-26 04:00 PM		30.51%	28.64%	Rs1,710,160.00	Rs1,721,270.00	Rs1,821,500.00	Rs5,971,000.00	0.94	0.99	-11,110.00 Rs	-111,340.00 Rs
Pre-Construction Phase		40	01-Jan-25 08:00 AM A	25-Feb-25 04:00 PM A		100%	100%	Rs181,840.00	Rs182,750.00	Rs181,840.00	Rs181,840.00	1.00	1.00	-910.00 Rs	Rs0.00
Site Survey and Soil Investigation		18	01-Jan-25 08:00 AM A	23-Jan-25 04:00 PM A		100%	100%	Rs55,200.00	Rs57,150.00	Rs55,200.00	Rs55,200.00	1.00	0.97	-1,950.00 Rs	Rs0.00
A1000	Topographic survey	5	01-Jan-25 08:00 AM A	07-Jan-25 04:00 PM A	100%	100%	100%	Rs12,800.00	Rs12,800.00	Rs12,800.00	Rs12,800.00	1.00	1.00	Rs0.00	Rs0.00
A1010	Borehole drilling and sampling	2	08-Jan-25 08:00 AM A	09-Jan-25 04:00 PM A	100%	100%	100%	Rs4,800.00	Rs4,800.00	Rs4,800.00	Rs4,800.00	1.00	1.00	Rs0.00	Rs0.00
A1020	Soil lab testing	7	10-Jan-25 08:00 AM A	22-Jan-25 04:00 PM A	100%	100%	100%	Rs16,800.00	Rs16,800.00	Rs16,800.00	Rs16,800.00	1.00	1.00	Rs0.00	Rs0.00
A1030	Geotechnical report preparation	2	23-Jan-25 08:00 AM A	23-Jan-25 04:00 PM A	100%	100%	100%	Rs20,800.00	Rs22,750.00	Rs20,800.00	Rs20,800.00	1.00	0.91	-1,950.00 Rs	Rs0.00
Design Approvals		22	24-Jan-25 08:00 AM A	17-Feb-25 04:00 PM A		100%	100%	Rs58,640.00	Rs57,600.00	Rs58,640.00	Rs58,640.00	1.00	1.02	Rs1,040.00	Rs0.00
A1040	Drawing preparation	7	24-Jan-25 08:00 AM A	04-Feb-25 04:00 PM A	100%	100%	100%	Rs34,160.00	Rs34,160.00	Rs34,160.00	Rs34,160.00	1.00	1.00	Rs0.00	Rs0.00
A1050	Submission to local authority	7	05-Feb-25 08:00 AM A	13-Feb-25 04:00 PM A	100%	100%	100%	Rs19,600.00	Rs21,000.00	Rs19,600.00	Rs19,600.00	1.00	0.93	-1,400.00 Rs	Rs0.00
A1060	Revisions and approval follow-up	7	14-Feb-25 08:00 AM A	17-Feb-25 04:00 PM A	100%	100%	100%	Rs4,880.00	Rs2,440.00	Rs4,880.00	Rs4,880.00	1.00	2.00	Rs2,440.00	Rs0.00
Site Setup		6	18-Feb-25 08:00 AM A	25-Feb-25 04:00 PM A		100%	100%	Rs68,000.00	Rs68,000.00	Rs68,000.00	Rs68,000.00	1.00	1.00	Rs0.00	Rs0.00
A1070	Mobilization	2	18-Feb-25 08:00 AM A	19-Feb-25 04:00 PM A	100%	100%	100%	Rs5,760.00	Rs5,760.00	Rs5,760.00	Rs5,760.00	1.00	1.00	Rs0.00	Rs0.00
A1080	Clearing and leveling	2	20-Feb-25 08:00 AM A	21-Feb-25 04:00 PM A	100%	100%	100%	Rs40,800.00	Rs40,800.00	Rs40,800.00	Rs40,800.00	1.00	1.00	Rs0.00	Rs0.00
A1090	Utility setup (temporary water/electricity)	1	24-Feb-25 08:00 AM A	24-Feb-25 04:00 PM A	100%	100%	100%	Rs18,240.00	Rs18,240.00	Rs18,240.00	Rs18,240.00	1.00	1.00	Rs0.00	Rs0.00
A1100	Safety measures and signage	1	25-Feb-25 08:00 AM A	25-Feb-25 04:00 PM A	100%	100%	100%	Rs3,200.00	Rs3,200.00	Rs3,200.00	Rs3,200.00	1.00	1.00	Rs0.00	Rs0.00
Substructure		75	26-Feb-25 08:00 AM A	30-May-25 08:00 AM A		100%	100%	Rs1,411,440.00	Rs1,421,640.00	Rs1,411,440.00	Rs1,411,440.00	1.00	0.99	-10,200.00 Rs	Rs0.00
Excavation		11	26-Feb-25 08:00 AM A	10-Mar-25 04:00 PM A		100%	100%	Rs644,400.00	Rs644,400.00	Rs644,400.00	Rs644,400.00	1.00	1.00	Rs0.00	Rs0.00
A1110	Basement Excavation	10	26-Feb-25 08:00 AM A	07-Mar-25 04:00 PM A	100%	100%	100%	Rs604,000.00	Rs604,000.00	Rs604,000.00	Rs604,000.00	1.00	1.00	Rs0.00	Rs0.00
A1120	Swimming Pool Excavation	1	08-Mar-25 08:00 AM A	10-Mar-25 04:00 PM A	100%	100%	100%	Rs20,400.00	Rs20,400.00	Rs20,400.00	Rs20,400.00	1.00	1.00	Rs0.00	Rs0.00
A1130	Isolated Footing Excavation	1	08-Mar-25 08:00 AM A	10-Mar-25 04:00 PM A	100%	100%	100%	Rs20,000.00	Rs20,000.00	Rs20,000.00	Rs20,000.00	1.00	1.00	Rs0.00	Rs0.00
Reinforcement and Shuttering Works For Raft and Isolated Footing		11	03-Mar-25 08:00 AM A	19-Mar-25 04:00 PM A		100%	100%	Rs121,280.00	Rs120,840.00	Rs121,280.00	Rs121,280.00	1.00	1.00	Rs440.00	Rs0.00
A1140	Layout marking	1	10-Mar-25 08:00 AM A	10-Mar-25 04:00 PM A	100%	100%	100%	Rs2,560.00	Rs1,280.00	Rs2,560.00	Rs2,560.00	1.00	2.00	Rs1,280.00	Rs0.00
A1150	Cutting and bending steel	4	03-Mar-25 08:00 AM A	06-Mar-25 04:00 PM A	100%	100%	100%	Rs20,160.00	Rs21,000.00	Rs20,160.00	Rs20,160.00	1.00	0.96	-840.00 Rs	Rs0.00
A1160	Shuttering/formwork installation	1	11-Mar-25 12:00 PM A	12-Mar-25 12:00 PM A	100%	100%	100%	Rs4,480.00	Rs4,480.00	Rs4,480.00	Rs4,480.00	1.00	1.00	Rs0.00	Rs0.00
A1170	Reinforcement Placement	7	13-Mar-25 08:00 AM A	19-Mar-25 04:00 PM A	100%	100%	100%	Rs94,080.00	Rs94,080.00	Rs94,080.00	Rs94,080.00	1.00	1.00	Rs0.00	Rs0.00
Concrete Works For Raft		21	11-Mar-25 08:29 AM A	14-Apr-25 05:00 PM A		100%	100%	Rs120,640.00	Rs122,320.00	Rs120,640.00	Rs120,640.00	1.00	0.99	-1,680.00 Rs	Rs0.00
A1180	PCC Before Laying Raft	1	11-Mar-25 08:29 AM A	12-Mar-25 08:29 AM A	100%	100%	100%	Rs51,360.00	Rs50,800.00	Rs51,360.00	Rs51,360.00	1.00	1.01	Rs560.00	Rs0.00
A1190	Raft Concreting	1	20-Mar-25 08:40 AM A	21-Mar-25 08:40 AM A	100%	100%	100%	Rs51,360.00	Rs53,600.00	Rs51,360.00	Rs51,360.00	1.00	0.96	-2,240.00 Rs	Rs0.00
A1200	Curing	14	22-Mar-25 08:00 AM A	10-Apr-25 04:00 PM A	100%	100%	100%	Rs15,680.00	Rs15,680.00	Rs15,680.00	Rs15,680.00	1.00	1.00	Rs0.00	Rs0.00
A1205	Stripping of Formwork	1	11-Apr-25 07:00 AM A	14-Apr-25 05:00 PM A	100%	100%	100%	Rs2,240.00	Rs2,240.00	Rs2,240.00	Rs2,240.00	1.00	1.00	Rs0.00	Rs0.00
Reinforcement and Shuttering Works for RCC Walls and Columns		15	20-Mar-25 08:00 AM A	03-Apr-25 04:00 PM A		100%	100%	Rs70,880.00	Rs70,880.00	Rs70,880.00	Rs70,880.00	1.00	1.00	Rs0.00	Rs0.00
A1210	Layout marking	1	20-Mar-25 08:00 AM A	20-Mar-25 04:00 PM A	100%	100%	100%	Rs2,560.00	Rs2,560.00	Rs2,560.00	Rs2,560.00	1.00	1.00	Rs0.00	Rs0.00
A1220	Cutting and bending steel	4	24-Mar-25 08:00 AM A	27-Mar-25 04:00 PM A	100%	100%	100%	Rs13,440.00	Rs13,440.00	Rs13,440.00	Rs13,440.00	1.00	1.00	Rs0.00	Rs0.00
A1230	Reiforcement Placement	5	27-Mar-25 08:00 AM A	02-Apr-25 04:00 PM A	100%	100%	100%	Rs50,400.00	Rs50,400.00	Rs50,400.00	Rs50,400.00	1.00	1.00	Rs0.00	Rs0.00
A1240	Shuttering/formwork installation	2	02-Apr-25 08:00 AM A	03-Apr-25 04:00 PM A	100%	100%	100%	Rs4,480.00	Rs4,480.00	Rs4,480.00	Rs4,480.00	1.00	1.00	Rs0.00	Rs0.00
Concrete Works For RCC Walls and Columns		9	04-Apr-25 08:00 AM A	19-Apr-25 08:00 AM A		100%	100%	Rs61,440.00	Rs64,800.00	Rs61,440.00	Rs61,440.00	1.00	0.95	-3,360.00 Rs	Rs0.00
A1250	Concrete Pouring	1	04-Apr-25 08:00 AM A	04-Apr-25 04:00 PM A	100%	100%	100%	Rs51,360.00	Rs53,600.00	Rs51,360.00	Rs51,360.00	1.00	0.96	-2,240.00 Rs	Rs0.00
A1260	Curing	7	05-Apr-25 08:00 AM A	15-Apr-25 04:00 PM A	100%	100%	100%	Rs7,840.00	Rs7,840.00	Rs7,840.00	Rs7,840.00	1.00	1.00	Rs0.00	Rs0.00
A1361	Stripping of Formwork	1	18-Apr-25 08:00 AM A	19-Apr-25 08:00 AM A	100%	100%	100%	Rs2,240.00	Rs3,360.00	Rs2,240.00	Rs2,240.00	1.00	0.67	-1,120.00 Rs	Rs0.00
Basement Slab		20	05-Apr-25 08:00 AM A	09-May-25 08:00 AM		100%	100%	Rs116,880.00	Rs121,080.00	Rs116,880.00	Rs116,880.00	1.00	0.97	-4,200.00 Rs	Rs0.00
A1262	Shuttering and Formwork	5	15-Apr-25 08:00 AM A	19-Apr-25 08:00 AM A	100%	100%	100%	Rs17,920.00	Rs17,920.00	Rs17,920.00	Rs17,920.00	1.00	1.00	Rs0.00	Rs0.00
A1263	Cutting and bending steel	2	05-Apr-25 08:00 AM A	08-Apr-25 06:00 PM A	100%	100%	100%	Rs6,720.00	Rs6,720.00	Rs6,720.00	Rs6,720.00	1.00	1.00	Rs0.00	Rs0.00
A1264	Reinforcement Placement	5	09-Apr-25 08:00 AM A	18-Apr-25 05:00 PM A	100%	100%	100%	Rs25,200.00	Rs25,200.00	Rs25,200.00	Rs25,200.00	1.00	1.00	Rs0.00	Rs0.00
A1265	Concrete Pouring	1	19-Apr-25 08:00 AM A	21-Apr-25 08:00 AM A	100%	100%	100%	Rs50,240.00	Rs52,200.00	Rs50,240.00	Rs50,240.00	1.00	0.96	-1,960.00 Rs	Rs0.00
A1266	Curing	14	22-Apr-25 08:00 AM A	09-May-25 08:00 AM	100%	100%	100%	Rs15,680.00	Rs15,680.00	Rs15,680.00	Rs15,680.00	1.00	1.00	Rs0.00	Rs0.00
A1267	Stripping of Formwork	1	06-May-25 08:00 AM	07-May-25 08:00 AM	100%	100%	100%	Rs1,120.00	Rs3,360.00	Rs1,120.00	Rs1,120.00	1.00	0.33	-2,240.00 Rs	Rs0.00
Backfilling and Compaction		5	08-May-25 08:00 AM	14-May-25 12:00 PM		100%	100%	Rs199,360.00	Rs200,200.00	Rs199,360.00	Rs199,360.00	1.00	1.00	-840.00 Rs	Rs0.00
A1270	Earth filling in layers	3	08-May-25 08:00 AM	12-May-25 04:00 PM	100%	100%	100%	Rs100,000.00	Rs100,000.00	Rs100,000.00	Rs100,000.00	1.00	1.00	Rs0.00	Rs0.00
A1280	Mechanical compaction	3	08-May-25 12:00 PM	13-May-25 12:00 PM	100%	100%	100%	Rs96,000.00	Rs96,000.00	Rs96,000.00	Rs96,000.00	1.00	1.00	Rs0.00	Rs0.00
A1290	Leveling	1	13-May-25 12:00 PM	14-May-25 12:00 PM	100%	100%	100%	Rs3,360.00	Rs4,200.00	Rs3,360.00	Rs3,360.00	1.00	0.80	-840.00 Rs	Rs0.00
Plinth Beam		13	15-May-25 08:00 AM	30-May-25 08:00 AM		100%	100%	Rs76,560.00	Rs77,120.00	Rs76,560.00	Rs76,560.00	1.00	0.99	-560.00 Rs	Rs0.00
A1320	Cutting and Bending steel bars	3	15-May-25 08:00 AM	19-May-25 04:00 PM	100%	100%	100%	Rs15,120.00	Rs15,120.00	Rs15,120.00	Rs15,120.00	1.00	1.00	Rs0.00	Rs0.00
A1325	Shuttering and Reinforcement Placement	1	19-May-25 04:00 PM	20-May-25 04:00 PM	100%	100%	100%	Rs2,240.00	Rs2,240.00	Rs2,240.00	Rs2,240.00	1.00	1.00	Rs0.00	Rs0.00
A1330	Concrete pouring	1	21-May-25 08:00 AM	21-May-25 04:00 PM	100%	100%	100%	Rs50,240.00	Rs50,800.00	Rs50,240.00	Rs50,240.00	1.00	0.99	-560.00 Rs	Rs0.00
A1332	Curing	7	22-May-25 08:00 AM	30-May-25 08:00 AM	100%	100%	100%	Rs7,840.00	Rs7,840.00	Rs7,840.00	Rs7,840.00	1.00	1.00	Rs0.00	Rs0.00
A1336	Stripping of Formwork	1	29-May-25 08:00 AM	30-May-25 08:00 AM	100%	100%	100%	Rs1,120.00	Rs1,120.00	Rs1,120.00	Rs1,120.00	1.00	1.00	Rs0.00	Rs0.00

Activity ID	Activity Name	Original Duration	Start	Finish	Activity % Complete	Schedule % Complete	Perf % Complete	EV	AC	PV	BAC	==	SPI	CPI	Cost Variance	Schedule Variance
Superstructure		47	21-May-25 08:00 AM A	17-Jul-25 04:00 PM		17.06%	4.58%	Rs31,120.00	Rs31,120.00	Rs115,860.00	Rs679,240.00		0.27	1.00	Rs0.00	-84,740.00 Rs
Ground Floor		26	21-May-25 08:00 AM	23-Jun-25 04:00 PM		30.67%	8.24%	Rs31,120.00	Rs31,120.00	Rs115,860.00	Rs377,720.00		0.27	1.00	Rs0.00	-84,740.00 Rs
Column Shuttering and Reinforcement		7	21-May-25 08:00 AM	28-May-25 04:00 PM		100%	100%	Rs31,120.00	Rs31,120.00	Rs31,120.00	Rs31,120.00		1.00	1.00	Rs0.00	Rs0.00
A1340	Column Marking	1	22-May-25 08:00 AM	22-May-25 04:00 PM	100%	100%	100%	Rs2,560.00	Rs2,560.00	Rs2,560.00	Rs2,560.00		1.00	1.00	Rs0.00	Rs0.00
A1345	Cutting and Bending Steel	3	21-May-25 08:00 AM	24-May-25 08:00 AM	100%	100%	100%	Rs15,120.00	Rs15,120.00	Rs15,120.00	Rs15,120.00		1.00	1.00	Rs0.00	Rs0.00
A1350	Reinforcement Placement and Shuttering	3	24-May-25 08:00 AM	28-May-25 04:00 PM	100%	100%	100%	Rs13,440.00	Rs13,440.00	Rs13,440.00	Rs13,440.00		1.00	1.00	Rs0.00	Rs0.00
Beam and Slab Shuttering and Reinforcement		8	30-May-25 08:00 AM	11-Jun-25 04:00 PM		51.6%	0%	Rs0.00	Rs0.00	Rs23,280.00	Rs45,120.00		0.00	0.00	Rs0.00	-23,280.00 Rs
A1360	Beam Level Marking	1	30-May-25 08:00 AM	30-May-25 04:00 PM	0%	100%	0%	Rs0.00	Rs0.00	Rs2,560.00	Rs2,560.00		0.00	0.00	Rs0.00	-2,560.00 Rs
A1370	Shuttering Placement	3	02-Jun-25 08:00 AM	04-Jun-25 04:00 PM	0%	66.67%	0%	Rs0.00	Rs0.00	Rs8,960.00	Rs13,440.00		0.00	0.00	Rs0.00	-8,960.00 Rs
A1375	Cutting and Bending Steel	2	30-May-25 08:00 AM	02-Jun-25 08:00 AM	0%	100%	0%	Rs0.00	Rs0.00	Rs6,720.00	Rs6,720.00		0.00	0.00	Rs0.00	-6,720.00 Rs
A1380	Reinforcement Placement	4	02-Jun-25 08:00 AM	05-Jun-25 04:00 PM	0%	25%	0%	Rs0.00	Rs0.00	Rs5,040.00	Rs20,160.00		0.00	0.00	Rs0.00	-5,040.00 Rs
A1385	Stripping of Formwork	1	10-Jun-25 04:00 PM	11-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,240.00		0.00	0.00	Rs0.00	Rs0.00
Staircase Construction		8	30-May-25 08:00 AM	11-Jun-25 04:00 PM		86.92%	0%	Rs0.00	Rs0.00	Rs7,440.00	Rs8,560.00		0.00	0.00	Rs0.00	-7,440.00 Rs
A1390	Staircase Marking	1	30-May-25 08:00 AM	30-May-25 04:00 PM	0%	100%	0%	Rs0.00	Rs0.00	Rs1,280.00	Rs1,280.00		0.00	0.00	Rs0.00	-1,280.00 Rs
A1395	Cutting and Bending Steel	1	30-May-25 08:00 AM	31-May-25 08:00 AM	0%	100%	0%	Rs0.00	Rs0.00	Rs3,360.00	Rs3,360.00		0.00	0.00	Rs0.00	-3,360.00 Rs
A1400	Reinforcement Placement and Shuttering	1	02-Jun-25 08:00 AM	02-Jun-25 04:00 PM	0%	100%	0%	Rs0.00	Rs0.00	Rs2,800.00	Rs2,800.00		0.00	0.00	Rs0.00	-2,800.00 Rs
A1405	Stripping of Formwork	1	10-Jun-25 04:00 PM	11-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,120.00		0.00	0.00	Rs0.00	Rs0.00
Concrete Works		19	29-May-25 08:00 AM	23-Jun-25 04:00 PM		44.78%	0%	Rs0.00	Rs0.00	Rs54,020.00	Rs120,640.00		0.00	0.00	Rs0.00	-54,020.00 Rs
A1410	Column Concrete Pouring	1	29-May-25 08:00 AM	29-May-25 04:00 PM	0%	100%	0%	Rs0.00	Rs0.00	Rs49,120.00	Rs49,120.00		0.00	0.00	Rs0.00	-49,120.00 Rs
A1420	Staircase, Beam and Slab Poring	1	03-Jun-25 08:00 AM	03-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs48,000.00		0.00	0.00	Rs0.00	Rs0.00
A1424	Curing Column	7	29-May-25 04:00 PM	10-Jun-25 04:00 PM	0%	62.5%	0%	Rs0.00	Rs0.00	Rs4,900.00	Rs7,840.00		0.00	0.00	Rs0.00	-4,900.00 Rs
A1428	Curing Slab	14	03-Jun-25 04:00 PM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs15,680.00		0.00	0.00	Rs0.00	Rs0.00
Brick Work		7	12-Jun-25 08:00 AM	20-Jun-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs172,280.00		0.00	0.00	Rs0.00	Rs0.00
A1430	External Walls Construction	6	12-Jun-25 08:00 AM	19-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs70,080.00		0.00	0.00	Rs0.00	Rs0.00
A1440	Internal Wall Construction	7	12-Jun-25 08:00 AM	20-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs102,200.00		0.00	0.00	Rs0.00	Rs0.00
First Floor		35	04-Jun-25 08:00 AM	17-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs301,520.00		0.00	0.00	Rs0.00	Rs0.00
Column Shuttering and Reinforcement)		9	04-Jun-25 08:00 AM	17-Jun-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs21,600.00		0.00	0.00	Rs0.00	Rs0.00
A1450	Column Marking	1	04-Jun-25 08:00 AM	04-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,560.00		0.00	0.00	Rs0.00	Rs0.00
A1455	Cutting and Bending Steel	2	12-Jun-25 08:00 AM	14-Jun-25 08:00 AM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs10,080.00		0.00	0.00	Rs0.00	Rs0.00
A1460	Shuttering and Reinforcement Placement	2	16-Jun-25 08:00 AM	17-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,960.00		0.00	0.00	Rs0.00	Rs0.00
Beam and Slab Shuttering and Reinforcement		22	12-Jun-25 08:00 AM	07-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs33,920.00		0.00	0.00	Rs0.00	Rs0.00
A1470	Beam Level Marking	1	19-Jun-25 08:00 AM	19-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,560.00		0.00	0.00	Rs0.00	Rs0.00
A1480	Shuttering Placement	2	20-Jun-25 08:00 AM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,960.00		0.00	0.00	Rs0.00	Rs0.00
A1485	Cutting and Bending Steel	2	12-Jun-25 08:00 AM	14-Jun-25 08:00 AM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs5,040.00		0.00	0.00	Rs0.00	Rs0.00
A1490	Reinforcement Placement	3	16-Jun-25 08:00 AM	18-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs15,120.00		0.00	0.00	Rs0.00	Rs0.00
A1495	Stripping of Formwork	1	05-Jul-25 04:00 PM	07-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,240.00		0.00	0.00	Rs0.00	Rs0.00
Staircase Construction		22	12-Jun-25 08:00 AM	07-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,560.00		0.00	0.00	Rs0.00	Rs0.00
A1500	Staircase Marking	1	19-Jun-25 08:00 AM	19-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,280.00		0.00	0.00	Rs0.00	Rs0.00
A1505	Cutting and Bending Steel	1	12-Jun-25 08:00 AM	13-Jun-25 08:00 AM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs3,360.00		0.00	0.00	Rs0.00	Rs0.00
A1510	Reinforcement Placement and Shuttering	1	16-Jun-25 08:00 AM	16-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,800.00		0.00	0.00	Rs0.00	Rs0.00
A1514	Stripping of Formwork	1	05-Jul-25 04:00 PM	07-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,120.00		0.00	0.00	Rs0.00	Rs0.00
Concrete Works		16	17-Jun-25 04:00 PM	05-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs120,640.00		0.00	0.00	Rs0.00	Rs0.00
A1518	Column Concret Pouring	1	17-Jun-25 04:00 PM	18-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs49,120.00		0.00	0.00	Rs0.00	Rs0.00
A1520	Staircase, Beam and Slab Poring	1	19-Jun-25 08:00 AM	19-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs50,240.00		0.00	0.00	Rs0.00	Rs0.00
A1524	Curing Column	5	18-Jun-25 04:00 PM	24-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs5,600.00		0.00	0.00	Rs0.00	Rs0.00
A1528	Curing Slab	14	19-Jun-25 04:00 PM	05-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs15,680.00		0.00	0.00	Rs0.00	Rs0.00
Brick Work		9	08-Jul-25 08:00 AM	17-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs116,800.00		0.00	0.00	Rs0.00	Rs0.00
A1530	External Walls Construction	4	08-Jul-25 08:00 AM	11-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs46,720.00		0.00	0.00	Rs0.00	Rs0.00
A1540	Internal Wall Construction	5	08-Jul-25 08:00 AM	14-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs58,400.00		0.00	0.00	Rs0.00	Rs0.00
A1545	Parapet Wall Construction	3	14-Jul-25 04:00 PM	17-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs11,680.00		0.00	0.00	Rs0.00	Rs0.00
MEP Works (Mechanical, Electrical, Plumbing)		117	18-Apr-25 08:00 AM A	08-Sep-25 12:00 PM		3.08%	0.4%	Rs4,000.00	Rs4,000.00	Rs30,600.00	Rs992,280.00		0.13	1.00	Rs0.00	-26,600.00 Rs
Electrical		107	18-Apr-25 08:00 AM A	27-Aug-25 12:00 PM		1.9%	1.52%	Rs4,000.00	Rs4,000.00	Rs5,000.00	Rs262,760.00		0.80	1.00	Rs0.00	-1,000.00 Rs
Conduit Laying		79	18-Apr-25 08:00 AM A	23-Jul-25 04:00 PM		7.6%	6.08%	Rs4,000.00	Rs4,000.00	Rs5,000.00	Rs65,760.00		0.80	1.00	Rs0.00	-1,000.00 Rs
A1550	Marking routes and Cutting chases	7	15-Jul-25 08:00 AM	23-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs31,360.00		0.00	0.00	Rs0.00	Rs0.00
A1560	Laying and Fiixing of PVC conduits in Basement Slab	1	18-Apr-25 08:00 AM A	18-Apr-25 04:00 PM A	100%	100%	100%	Rs4,000.00	Rs4,000.00	Rs4,000.00	Rs4,000.00		1.00	1.00	Rs0.00	Rs0.00
A1563	Laying and Fiixing of PVC conduits in Ground Floor Slab	1	02-Jun-25 04:00 PM	03-Jun-25 04:00 PM	0%	25%	0%	Rs0.00	Rs0.00	Rs1,000.00	Rs4,000.00		0.00	0.00	Rs0.00	-1,000.00 Rs
A1566	Laying and Fiixing of PVC conduits in First Floor Slab	1	16-Jun-25 04:00 PM	17-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,000.00		0.00	0.00	Rs0.00	Rs0.00
A1569	Laying and Fiixing of PVC conduits in Walls	1	14-Jul-25 04:00 PM	15-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00		0.00	0.00	Rs0.00	Rs0.00
A1570	Fixing junction boxes and switch boxes	2	16-Jul-25 08:00 AM	17-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00		0.00	0.00	Rs0.00	Rs0.00
A1580	Inspection before plastering or slab casting	2	18-Jul-25 08:00 AM	21-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs6,400.00		0.00	0.00	Rs0.00	Rs0.00
Wiring and Cabling		10	22-Jul-25 08:00 AM	04-Aug-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs67,000.00		0.00	0.00	Rs0.00	Rs0.00
A1590	Pulling wires through conduits	8	22-Jul-25 08:00 AM	31-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs64,000.00		0.00	0.00	Rs0.00	Rs0.00
A1600	Terminating wires in switch boxes and DBs	1	01-Aug-25 08:00 AM	01-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,000.00		0.00	0.00	Rs0.00	Rs0.00
A1610	Segregation of lighting, power, and HVAC wiring	1	04-Aug-25 08:00 AM	04-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,000.00		0.00	0.00	Rs0.00	Rs0.00


Activity ID	Activity Name	Original Duration	Start	Finish	Activity % Complete	Schedule % Complete	Perf % Complete	EV	AC	PV	BAC	SPI	CPI	Cost Variance	Schedule Variance
	Distribution Boards and Panel Installations	5	04-Aug-25 12:00 PM	11-Aug-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs10,000.00	0.00	0.00	Rs0.00	Rs0.00
A1620	Mounting DBs and electrical panels	2	04-Aug-25 12:00 PM	06-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,000.00	0.00	0.00	Rs0.00	Rs0.00
A1630	Connecting incoming/outgoing wires with MCBs/isolators	2	06-Aug-25 12:00 PM	08-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,000.00	0.00	0.00	Rs0.00	Rs0.00
A1640	Earthing connection and neutral link bar setup	1	08-Aug-25 12:00 PM	11-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,000.00	0.00	0.00	Rs0.00	Rs0.00
	Light Fixtures, Switches, and Sockets	12	11-Aug-25 12:00 PM	27-Aug-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs120,000.00	0.00	0.00	Rs0.00	Rs0.00
A1645	Fixing modular switches, sockets, dimmers, regulators	7	11-Aug-25 12:00 PM	20-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs70,000.00	0.00	0.00	Rs0.00	Rs0.00
A1650	Installation of lights, fans, exhausts	5	20-Aug-25 12:00 PM	27-Aug-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs50,000.00	0.00	0.00	Rs0.00	Rs0.00
	Plumbing	52	29-May-25 08:00 AM	01-Aug-25 04:00 PM		3.76%	0%	Rs0.00	Rs0.00	Rs25,600.00	Rs681,520.00	0.00	0.00	Rs0.00	-25,600.00 Rs
	Drainage Piping	39	29-May-25 08:00 AM	16-Jul-25 04:00 PM		31.56%	0%	Rs0.00	Rs0.00	Rs22,240.00	Rs70,480.00	0.00	0.00	Rs0.00	-22,240.00 Rs
A1670	Laying of Waste Water Pipes for Basement	3	29-May-25 08:00 AM	02-Jun-25 04:00 PM	0%	66.67%	0%	Rs0.00	Rs0.00	Rs12,000.00	Rs18,000.00	0.00	0.00	Rs0.00	-12,000.00 Rs
A1673	Laying of Main and Backwash Draining line for Swimming pool	1	29-May-25 08:00 AM	30-May-25 08:00 AM	0%	100%	0%	Rs0.00	Rs0.00	Rs4,000.00	Rs4,000.00	0.00	0.00	Rs0.00	-4,000.00 Rs
A1676	Setting and Fixing Pipes, traps, gully chambers, and floor drains for Basement	1	30-May-25 08:00 AM	31-May-25 08:00 AM	0%	100%	0%	Rs0.00	Rs0.00	Rs4,000.00	Rs4,000.00	0.00	0.00	Rs0.00	-4,000.00 Rs
A1679	Laying of Main Drain and Wastwater Pipes for Ground Floor	2	20-Jun-25 04:00 PM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs12,000.00	0.00	0.00	Rs0.00	Rs0.00
A1680	Setting and Fixing Pipes, traps, gully chambers, and floor drains for Ground Floor	2	23-Jun-25 08:00 AM	24-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A1684	Laying of Main Drain and Wastwater Pipes for First Floor	2	14-Jul-25 04:00 PM	16-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs12,000.00	0.00	0.00	Rs0.00	Rs0.00
A1688	Setting and Fixing Pipes, traps, gully chambers, and floor drains for First and Roof Floor	2	14-Jul-25 04:00 PM	16-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A1690	Providing sleeves through slabs/walls	2	30-May-25 08:00 AM	02-Jun-25 04:00 PM	0%	50%	0%	Rs0.00	Rs0.00	Rs2,240.00	Rs4,480.00	0.00	0.00	Rs0.00	-2,240.00 Rs
	Water Supply Lines	8	14-Jul-25 04:00 PM	23-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs82,000.00	0.00	0.00	Rs0.00	Rs0.00
A1695	Installation of Cold/hot Water pipelines for Swimming Pool and Basement	2	14-Jul-25 04:00 PM	16-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A1700	Installation of cold/hot water PPR pipelines and elbows, tees, valves, and pressure reducers	7	15-Jul-25 08:00 AM	23-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs56,000.00	0.00	0.00	Rs0.00	Rs0.00
A1710	Fixing and Routing pipes, from tanks to Bathroom/Kitchen	3	15-Jul-25 08:00 AM	17-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs18,000.00	0.00	0.00	Rs0.00	Rs0.00
	Installation of Sanitary Fixtures	10	18-Jul-25 08:00 AM	31-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs70,000.00	0.00	0.00	Rs0.00	Rs0.00
A1720	Installation of WC, wash basins, urinals, sinks	5	18-Jul-25 08:00 AM	24-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs40,000.00	0.00	0.00	Rs0.00	Rs0.00
A1730	Connecting fixtures to drainage and water supply	2	25-Jul-25 08:00 AM	28-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs12,000.00	0.00	0.00	Rs0.00	Rs0.00
A1740	Fixing brackets, flexible hoses, bottle traps	3	29-Jul-25 08:00 AM	31-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs18,000.00	0.00	0.00	Rs0.00	Rs0.00
	Underground and Overhead Water Tanks	49	02-Jun-25 08:00 AM	01-Aug-25 04:00 PM		0.73%	0%	Rs0.00	Rs0.00	Rs3,360.00	Rs459,040.00	0.00	0.00	Rs0.00	-3,360.00 Rs
A1750	Excavation and PCC for Underground Water Tanks	2	05-Jun-25 08:00 AM	06-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs80,800.00	0.00	0.00	Rs0.00	Rs0.00
A1760	Cutting and Bending Steel	3	02-Jun-25 08:00 AM	09-Jun-25 08:00 AM	0%	33.33%	0%	Rs0.00	Rs0.00	Rs3,360.00	Rs10,080.00	0.00	0.00	Rs0.00	-3,360.00 Rs
A1765	Reinforcement Placement and Formwork Installation	3	09-Jun-25 08:00 AM	11-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs16,800.00	0.00	0.00	Rs0.00	Rs0.00
A1770	Casting walls of Underground Water Tank	1	12-Jun-25 08:00 AM	12-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs49,120.00	0.00	0.00	Rs0.00	Rs0.00
A1774	Slab Shuttering and Reinforcement Placement	2	11-Jun-25 04:00 PM	13-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs11,200.00	0.00	0.00	Rs0.00	Rs0.00
A1778	Slab Casting	1	13-Jun-25 04:00 PM	14-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs49,120.00	0.00	0.00	Rs0.00	Rs0.00
A1780	Reiforcement Placement and Forwork Installation for Overhead Water Tank Walls	4	18-Jul-25 08:00 AM	23-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs22,400.00	0.00	0.00	Rs0.00	Rs0.00
A1790	Casting Walls of Overhead Water Tank	1	23-Jul-25 04:00 PM	24-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs50,240.00	0.00	0.00	Rs0.00	Rs0.00
A1800	Slab Shuttering, Reinforcement Placement and Slab Casting	3	24-Jul-25 04:00 PM	29-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs164,160.00	0.00	0.00	Rs0.00	Rs0.00
A1810	Stripping of Formworks	1	29-Jul-25 04:00 PM	30-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,120.00	0.00	0.00	Rs0.00	Rs0.00
A1815	Pipe connections, float valve, inlet/outlet	2	31-Jul-25 08:00 AM	01-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,000.00	0.00	0.00	Rs0.00	Rs0.00
	Mechanical	8	27-Aug-25 12:00 PM	08-Sep-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs48,000.00	0.00	0.00	Rs0.00	Rs0.00
	AC Installation	8	27-Aug-25 12:00 PM	08-Sep-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs30,000.00	0.00	0.00	Rs0.00	Rs0.00
A1820	Marking and cutting wall openings for indoor units	3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs12,000.00	0.00	0.00	Rs0.00	Rs0.00
A1830	Mounting indoor and outdoor units	2	01-Sep-25 12:00 PM	03-Sep-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A1840	Laying refrigerant lines (copper piping) and insulation	2	03-Sep-25 12:00 PM	05-Sep-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A1850	Electrical power and drain connection	1	05-Sep-25 12:00 PM	08-Sep-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,000.00	0.00	0.00	Rs0.00	Rs0.00
	Equipment Installations	3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs18,000.00	0.00	0.00	Rs0.00	Rs0.00
A1860	Fixing geysers, ovens and Refrigerator	3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs18,000.00	0.00	0.00	Rs0.00	Rs0.00
	Finishing Works	169	08-May-25 08:00 AM A	01-Dec-25 04:00 PM		8.65%	8.65%	Rs81,760.00	Rs81,760.00	Rs81,760.00	Rs945,040.00	1.00	1.00	Rs0.00	Rs0.00
	Internal Finishes	140	08-May-25 08:00 AM	28-Oct-25 04:00 PM		11.59%	11.59%	Rs81,760.00	Rs81,760.00	Rs81,760.00	Rs705,320.00	1.00	1.00	Rs0.00	Rs0.00
	Internal Plaster	66	08-May-25 08:00 AM	31-Jul-25 04:00 PM		34.41%	34.41%	Rs81,760.00	Rs81,760.00	Rs81,760.00	Rs237,600.00	1.00	1.00	Rs0.00	Rs0.00
A1870	Cleaning, wetting and plastering for Basement	7	08-May-25 08:00 AM A	16-May-25 04:00 PM A	100%	100%	100%	Rs81,760.00	Rs81,760.00	Rs81,760.00	Rs81,760.00	1.00	1.00	Rs0.00	Rs0.00
A1875	Cleaning, wetting and plastering for Ground and First Floor	8	12-Jul-25 04:00 PM	22-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs140,160.00	0.00	0.00	Rs0.00	Rs0.00
A1880	Curing	7	23-Jul-25 08:00 AM	31-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs15,680.00	0.00	0.00	Rs0.00	Rs0.00
	Ceiling Work	20	01-Aug-25 08:00 AM	28-Aug-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs134,200.00	0.00	0.00	Rs0.00	Rs0.00
A1890	Install ceiling frame/suspension system	7	01-Aug-25 08:00 AM	11-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs61,600.00	0.00	0.00	Rs0.00	Rs0.00
A1900	Fix gypsum or ceiling boards	7	12-Aug-25 08:00 AM	20-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs46,200.00	0.00	0.00	Rs0.00	Rs0.00
A1910	Apply joint compound and sanding	3	21-Aug-25 08:00 AM	25-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs13,200.00	0.00	0.00	Rs0.00	Rs0.00
A1920	Paint or finish ceiling	3	26-Aug-25 08:00 AM	28-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs13,200.00	0.00	0.00	Rs0.00	Rs0.00
	Tiling	9	29-Aug-25 08:00 AM	10-Sep-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs55,000.00	0.00	0.00	Rs0.00	Rs0.00
A1930	Prepare Surface and Apply Adhesive	3	29-Aug-25 08:00 AM	02-Sep-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs19,800.00	0.00	0.00	Rs0.00	Rs0.00
A1940	Placing Tiles	4	03-Sep-25 08:00 AM	08-Sep-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs26,400.00	0.00	0.00	Rs0.00	Rs0.00
A1950	Grouting Tiles	2	09-Sep-25 08:00 AM	10-Sep-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,800.00	0.00	0.00	Rs0.00	Rs0.00
	Painting	24	11-Sep-25 08:00 AM	14-Oct-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs204,600.00	0.00	0.00	Rs0.00	Rs0.00
A1960	Scrape and sand surfaces	7	11-Sep-25 08:00 AM	19-Sep-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs61,600.00	0.00	0.00	Rs0.00	Rs0.00

Activity ID	Activity Name	Original Duration	Start	Finish	Activity % Complete	Schedule % Complete	Perf % Complete	EV	AC	PV	BAC	SPI	CPI	Cost Variance	Schedule Variance
A1970	Apply primer/sealer coat	7	22-Sep-25 08:00 AM	30-Sep-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs61,600.00	0.00	0.00	Rs0.00	Rs0.00
A1980	Apply two coats of internal paint	7	01-Oct-25 08:00 AM	09-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs61,600.00	0.00	0.00	Rs0.00	Rs0.00
A1990	Touch-ups and final finish	3	10-Oct-25 08:00 AM	14-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs19,800.00	0.00	0.00	Rs0.00	Rs0.00
Door & Window Installation		10	15-Oct-25 08:00 AM	28-Oct-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs73,920.00	0.00	0.00	Rs0.00	Rs0.00
A2000	Fix door/window frames	7	15-Oct-25 08:00 AM	23-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs62,720.00	0.00	0.00	Rs0.00	Rs0.00
A2010	Install shutters and hardware	1	24-Oct-25 08:00 AM	24-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,240.00	0.00	0.00	Rs0.00	Rs0.00
A2020	Seal joints with silicone/foam	2	27-Oct-25 08:00 AM	28-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,960.00	0.00	0.00	Rs0.00	Rs0.00
External Finishes		97	18-Jul-25 08:00 AM	01-Dec-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs239,720.00	0.00	0.00	Rs0.00	Rs0.00
External Plaster		13	29-Oct-25 08:00 AM	14-Nov-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs101,520.00	0.00	0.00	Rs0.00	Rs0.00
A2030	Surface Preperation and Scaffolding	3	29-Oct-25 08:00 AM	31-Oct-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs13,440.00	0.00	0.00	Rs0.00	Rs0.00
A2040	Cleaning, wetting and plastering	7	03-Nov-25 08:00 AM	11-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs73,920.00	0.00	0.00	Rs0.00	Rs0.00
A2050	Curing and Crack Repair	3	12-Nov-25 08:00 AM	14-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs14,160.00	0.00	0.00	Rs0.00	Rs0.00
Exterior Paint/Texture		11	17-Nov-25 08:00 AM	01-Dec-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs72,600.00	0.00	0.00	Rs0.00	Rs0.00
A2060	Surface scraping and priming	3	17-Nov-25 08:00 AM	19-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs19,800.00	0.00	0.00	Rs0.00	Rs0.00
A2070	Apply textured finish or base coat	4	20-Nov-25 08:00 AM	25-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs26,400.00	0.00	0.00	Rs0.00	Rs0.00
A2080	Apply final weatherproof paint coat	4	26-Nov-25 08:00 AM	01-Dec-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs26,400.00	0.00	0.00	Rs0.00	Rs0.00
Balcony, Railing		6	18-Jul-25 08:00 AM	25-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs28,000.00	0.00	0.00	Rs0.00	Rs0.00
A2090	Fix metal railing supports	3	18-Jul-25 08:00 AM	22-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs18,000.00	0.00	0.00	Rs0.00	Rs0.00
A2100	Install railing sections	2	23-Jul-25 08:00 AM	24-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs8,000.00	0.00	0.00	Rs0.00	Rs0.00
A2110	Weld/bolt and paint/coat railing	1	25-Jul-25 08:00 AM	25-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,000.00	0.00	0.00	Rs0.00	Rs0.00
Cladding and Special Finishes		5	17-Nov-25 08:00 AM	21-Nov-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs37,600.00	0.00	0.00	Rs0.00	Rs0.00
A2120	Mark layout for cladding	1	17-Nov-25 08:00 AM	17-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs2,560.00	0.00	0.00	Rs0.00	Rs0.00
A2130	Fixing Stone Cladding	4	18-Nov-25 08:00 AM	21-Nov-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs35,040.00	0.00	0.00	Rs0.00	Rs0.00
External Works		51	05-Jun-25 08:00 AM	07-Aug-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs1,569,800.00	0.00	0.00	Rs0.00	Rs0.00
Boundary Wall		34	23-Jun-25 08:00 AM	07-Aug-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs427,000.00	0.00	0.00	Rs0.00	Rs0.00
A2140	Excavation and Stepped footing for boundary wall	4	23-Jun-25 08:00 AM	26-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs80,000.00	0.00	0.00	Rs0.00	Rs0.00
A2150	Constructing Brick Wall	10	27-Jun-25 08:00 AM	10-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs116,800.00	0.00	0.00	Rs0.00	Rs0.00
A2160	Plastering and Curing	15	11-Jul-25 08:00 AM	31-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs175,200.00	0.00	0.00	Rs0.00	Rs0.00
A2170	Painting	5	01-Aug-25 08:00 AM	07-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs55,000.00	0.00	0.00	Rs0.00	Rs0.00
Drainage		13	05-Jun-25 08:00 AM	23-Jun-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs113,760.00	0.00	0.00	Rs0.00	Rs0.00
A2180	Excavation for Waste Water, Rain Water, Solid Waste Pipelines	3	05-Jun-25 08:00 AM	09-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs66,720.00	0.00	0.00	Rs0.00	Rs0.00
A2190	Gully Traps and Main Holes Construction	3	10-Jun-25 08:00 AM	12-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs11,680.00	0.00	0.00	Rs0.00	Rs0.00
A2200	Laying and Fixing Pipelines	4	13-Jun-25 08:00 AM	18-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs32,000.00	0.00	0.00	Rs0.00	Rs0.00
A2210	Grout Backfilling	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs3,360.00	0.00	0.00	Rs0.00	Rs0.00
Septic Tanks and Rain Water Tanks		13	05-Jun-25 08:00 AM	23-Jun-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs224,720.00	0.00	0.00	Rs0.00	Rs0.00
A2220	Excavation and Base Preperation	4	05-Jun-25 08:00 AM	10-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs88,960.00	0.00	0.00	Rs0.00	Rs0.00
A2230	Construction of Septic Tank Walls and Partitions	4	11-Jun-25 08:00 AM	16-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs23,360.00	0.00	0.00	Rs0.00	Rs0.00
A2240	Construction of Rain Water Tank Walls	3	11-Jun-25 08:00 AM	13-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs17,520.00	0.00	0.00	Rs0.00	Rs0.00
A2250	Slab Shuttering and Reinforcement Placement	4	16-Jun-25 08:00 AM	19-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs22,400.00	0.00	0.00	Rs0.00	Rs0.00
A2260	Concrete Pouring	1	20-Jun-25 08:00 AM	20-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs50,240.00	0.00	0.00	Rs0.00	Rs0.00
A2270	Backfilling and Compaction	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs22,240.00	0.00	0.00	Rs0.00	Rs0.00
Driveways, Landscaping		33	24-Jun-25 08:00 AM	01-Aug-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs636,800.00	0.00	0.00	Rs0.00	Rs0.00
A2280	Clearing site of debris, construction waste, and vegetation	5	24-Jun-25 08:00 AM	30-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs118,800.00	0.00	0.00	Rs0.00	Rs0.00
A2290	Grading and leveling the ground to proper slope	7	01-Jul-25 08:00 AM	09-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs280,000.00	0.00	0.00	Rs0.00	Rs0.00
A2300	Installing sprinkler heads or drip irrigation lines	5	09-Jul-25 04:00 PM	15-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs41,200.00	0.00	0.00	Rs0.00	Rs0.00
A2310	Laying underground cables for lights	4	10-Jul-25 08:00 AM	15-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs24,000.00	0.00	0.00	Rs0.00	Rs0.00
A2320	Sub-base and compaction for Driveway	4	16-Jul-25 08:00 AM	21-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs136,960.00	0.00	0.00	Rs0.00	Rs0.00
A2330	Lay pavers for driveway	4	22-Jul-25 08:00 AM	25-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs13,440.00	0.00	0.00	Rs0.00	Rs0.00
A2340	Laying grass turf or sowing grass seeds	5	28-Jul-25 08:00 AM	01-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs22,400.00	0.00	0.00	Rs0.00	Rs0.00
Guard Room Construction		11	23-Jun-25 08:00 AM	07-Jul-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs92,320.00	0.00	0.00	Rs0.00	Rs0.00
A2350	Excavation for Stepped Footing	1	23-Jun-25 08:00 AM	23-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs3,360.00	0.00	0.00	Rs0.00	Rs0.00
A2360	Construction of Brickwall	2	24-Jun-25 08:00 AM	25-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs9,440.00	0.00	0.00	Rs0.00	Rs0.00
A2370	Slab Shuttering and Reinforcement Placement	2	26-Jun-25 08:00 AM	27-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs11,680.00	0.00	0.00	Rs0.00	Rs0.00
A2380	Slab Concrete Pouring	1	30-Jun-25 08:00 AM	30-Jun-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs49,120.00	0.00	0.00	Rs0.00	Rs0.00
A2390	Internal and External Wall Plastering	2	01-Jul-25 08:00 AM	02-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs5,840.00	0.00	0.00	Rs0.00	Rs0.00
A2400	Door and Window Installation	2	03-Jul-25 08:00 AM	04-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,480.00	0.00	0.00	Rs0.00	Rs0.00
A2410	Installation of Bathroom Fixtures	1	07-Jul-25 08:00 AM	07-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,000.00	0.00	0.00	Rs0.00	Rs0.00
A2420	Internal and External Painting	1	03-Jul-25 08:00 AM	03-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs4,400.00	0.00	0.00	Rs0.00	Rs0.00
Gate and Security Systems		24	04-Jul-25 08:00 AM	06-Aug-25 04:00 PM		0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs75,200.00	0.00	0.00	Rs0.00	Rs0.00
A2430	Fabricate and install main gate	4	01-Aug-25 08:00 AM	06-Aug-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs24,000.00	0.00	0.00	Rs0.00	Rs0.00
A2440	Installation of Security Cameras	3	04-Jul-25 08:00 AM	08-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs21,600.00	0.00	0.00	Rs0.00	Rs0.00
A2450	Alarm System Installation	3	04-Jul-25 08:00 AM	08-Jul-25 04:00 PM	0%	0%	0%	Rs0.00	Rs0.00	Rs0.00	Rs21,600.00	0.00	0.00	Rs0.00	Rs0.00


Activity ID	Activity Name	Original Duration	Start	Finish	|	Activity % Complete	Schedule % Complete	Perf % Complete	||	EV	AC	PV	BAC	==	SPI	CPI	Cost Variance	Schedule Variance
A2460	Access Control System Setup	2	09-Jul-25 08:00 AM	10-Jul-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs4,000.00		0.00	0.00	Rs0.00	Rs0.00
A2470	Network & Power Setup	2	11-Jul-25 08:00 AM	14-Jul-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs4,000.00		0.00	0.00	Rs0.00	Rs0.00
Testing and Commissioning		42	15-Jul-25 08:00 AM	10-Sep-25 12:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs72,120.00		0.00	0.00	Rs0.00	Rs0.00
Electrical System Testing		3	27-Aug-25 12:00 PM	01-Sep-25 12:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs15,600.00		0.00	0.00	Rs0.00	Rs0.00
A2480	Continuity and insulation resistance tests	1	27-Aug-25 12:00 PM	28-Aug-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
A2490	Test RCDs/MCBs in DBs	1	28-Aug-25 12:00 PM	29-Aug-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
A2500	Voltage drop and load testing	1	29-Aug-25 12:00 PM	01-Sep-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
Plumbing and Leak Testing		3	04-Aug-25 08:00 AM	06-Aug-25 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs15,600.00		0.00	0.00	Rs0.00	Rs0.00
A2510	Pressure testing water lines	1	04-Aug-25 08:00 AM	04-Aug-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
A2520	Fill and inspect sanitary traps	1	05-Aug-25 08:00 AM	05-Aug-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
A2530	Leak detection and sealing	1	06-Aug-25 08:00 AM	06-Aug-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,200.00		0.00	0.00	Rs0.00	Rs0.00
Mechanical Equipment Commissioning		2	08-Sep-25 12:00 PM	10-Sep-25 12:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs8,920.00		0.00	0.00	Rs0.00	Rs0.00
A2540	Start-up and trial run of ACs, fans, geysers	1	08-Sep-25 12:00 PM	09-Sep-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs3,200.00		0.00	0.00	Rs0.00	Rs0.00
A2550	Monitor temperature, current, pressure levels	1	08-Sep-25 12:00 PM	09-Sep-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs2,520.00		0.00	0.00	Rs0.00	Rs0.00
A2560	Make final tuning and adjustments	1	09-Sep-25 12:00 PM	10-Sep-25 12:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs3,200.00		0.00	0.00	Rs0.00	Rs0.00
Final Inspection and Compliance		10	15-Jul-25 08:00 AM	28-Jul-25 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs32,000.00		0.00	0.00	Rs0.00	Rs0.00
A2570	Cross-check all systems and specs	4	15-Jul-25 08:00 AM	18-Jul-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs12,800.00		0.00	0.00	Rs0.00	Rs0.00
A2580	Consultant/Client joint walkthrough	1	21-Jul-25 08:00 AM	21-Jul-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs3,200.00		0.00	0.00	Rs0.00	Rs0.00
A2590	Rectify any non-compliance	5	22-Jul-25 08:00 AM	28-Jul-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs16,000.00		0.00	0.00	Rs0.00	Rs0.00
Handover and Documentation		32	24-Nov-25 08:00 AM	06-Jan-26 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs119,240.00		0.00	0.00	Rs0.00	Rs0.00
Final Cleaning and Snag Rectification		15	24-Nov-25 08:00 AM	12-Dec-25 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs47,880.00		0.00	0.00	Rs0.00	Rs0.00
A2600	Deep cleaning entire building	7	24-Nov-25 08:00 AM	02-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs23,520.00		0.00	0.00	Rs0.00	Rs0.00
A2610	Identify snags	3	03-Dec-25 08:00 AM	05-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs7,560.00		0.00	0.00	Rs0.00	Rs0.00
A2620	Fix all pending snags	5	08-Dec-25 08:00 AM	12-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs16,800.00		0.00	0.00	Rs0.00	Rs0.00
As-Built Drawings Preparation		9	15-Dec-25 08:00 AM	25-Dec-25 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs48,960.00		0.00	0.00	Rs0.00	Rs0.00
A2630	Collect red-line markups from site	2	15-Dec-25 08:00 AM	16-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs14,800.00		0.00	0.00	Rs0.00	Rs0.00
A2640	Draft and submit as-built drawings to client	7	17-Dec-25 08:00 AM	25-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs34,160.00		0.00	0.00	Rs0.00	Rs0.00
Handover to Client		2	26-Dec-25 08:00 AM	29-Dec-25 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs5,600.00		0.00	0.00	Rs0.00	Rs0.00
A2650	Prepare handover checklist	1	26-Dec-25 08:00 AM	26-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs2,800.00		0.00	0.00	Rs0.00	Rs0.00
A2660	Sign-off by client and project team	1	29-Dec-25 08:00 AM	29-Dec-25 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs2,800.00		0.00	0.00	Rs0.00	Rs0.00
Warranty Documents and Manuals		6	30-Dec-25 08:00 AM	06-Jan-26 04:00 PM			0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs16,800.00		0.00	0.00	Rs0.00	Rs0.00
A2670	Compile warranties, product data sheets	5	30-Dec-25 08:00 AM	05-Jan-26 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs14,000.00		0.00	0.00	Rs0.00	Rs0.00
A2680	Provide user manuals and maintenance guides	1	06-Jan-26 08:00 AM	06-Jan-26 04:00 PM		0%	0%	0%		Rs0.00	Rs0.00	Rs0.00	Rs2,800.00		0.00	0.00	Rs0.00	Rs0.00

Figure 9 Earned Value Analysis


EARN VALUE ANALYSIS (GANTING)

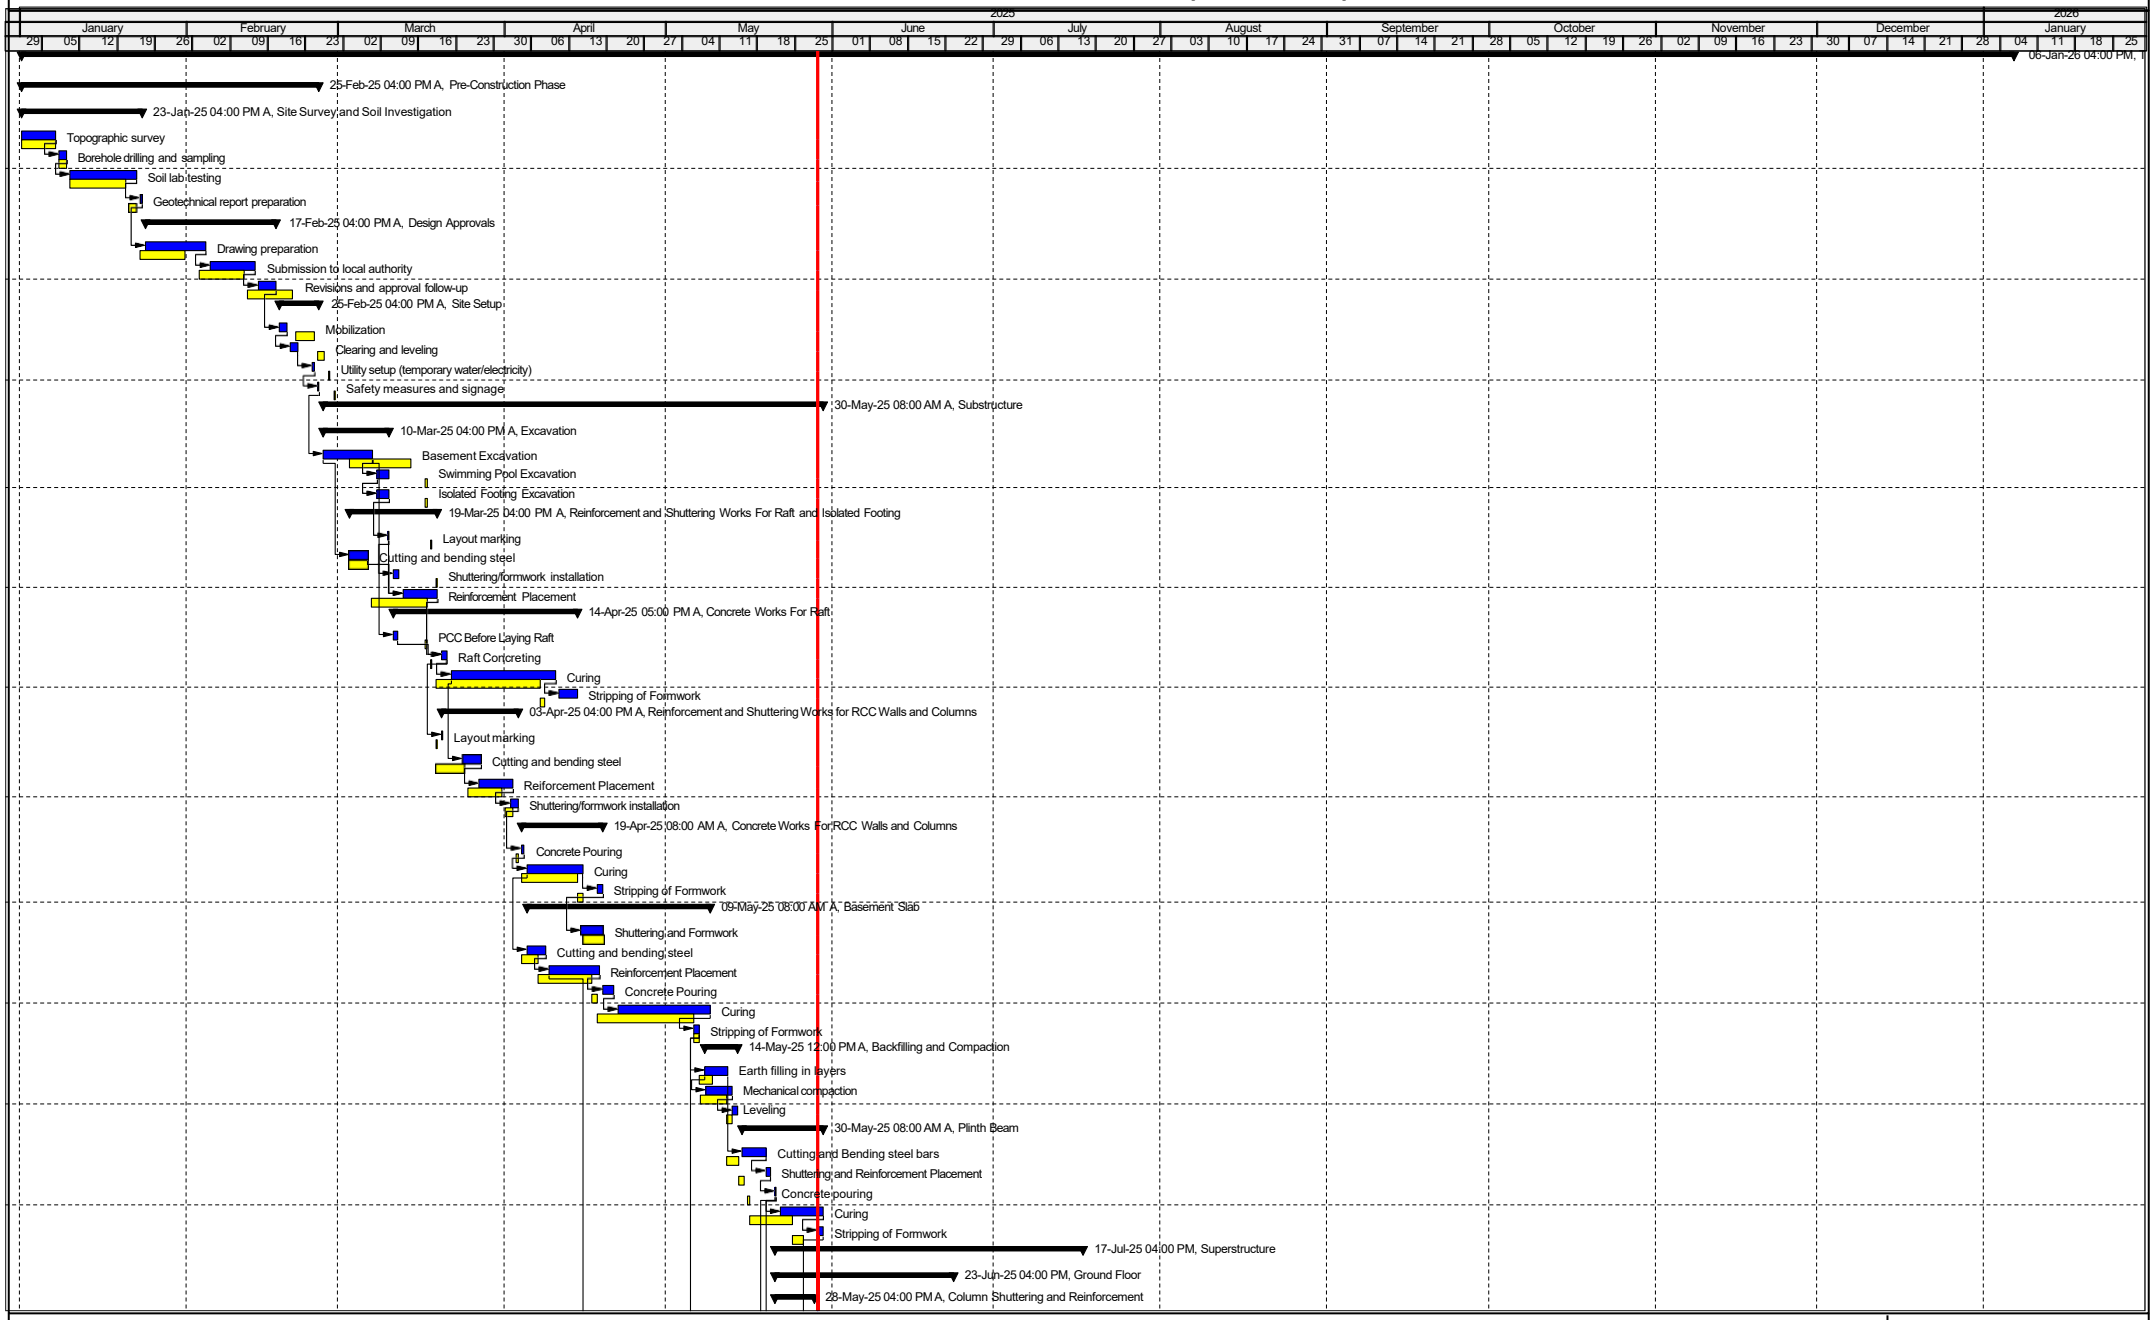


Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

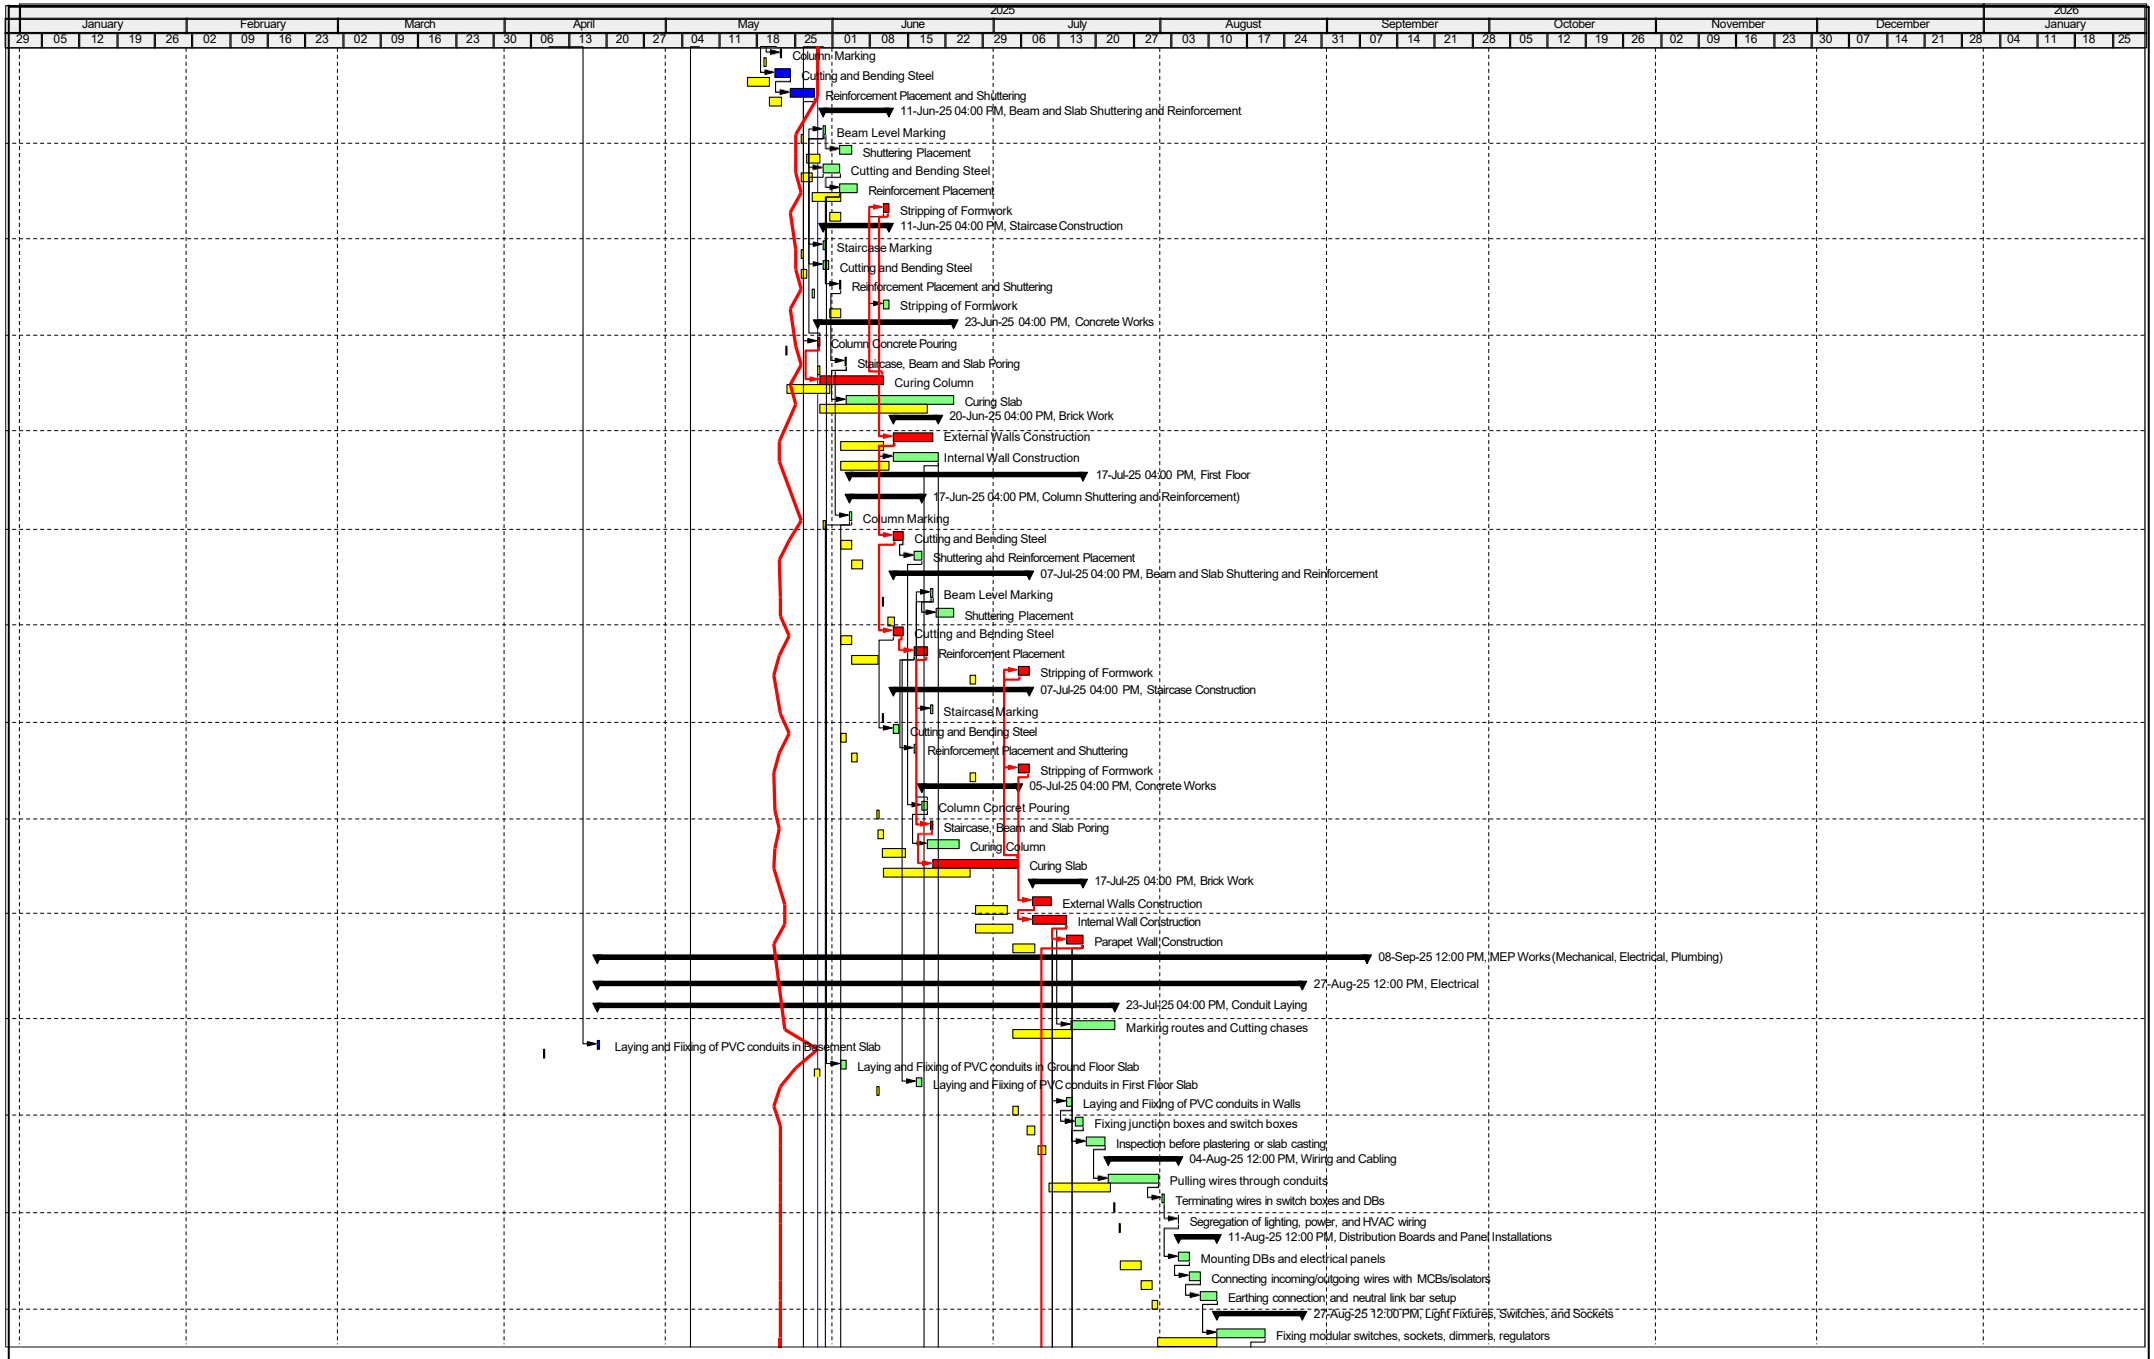

Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

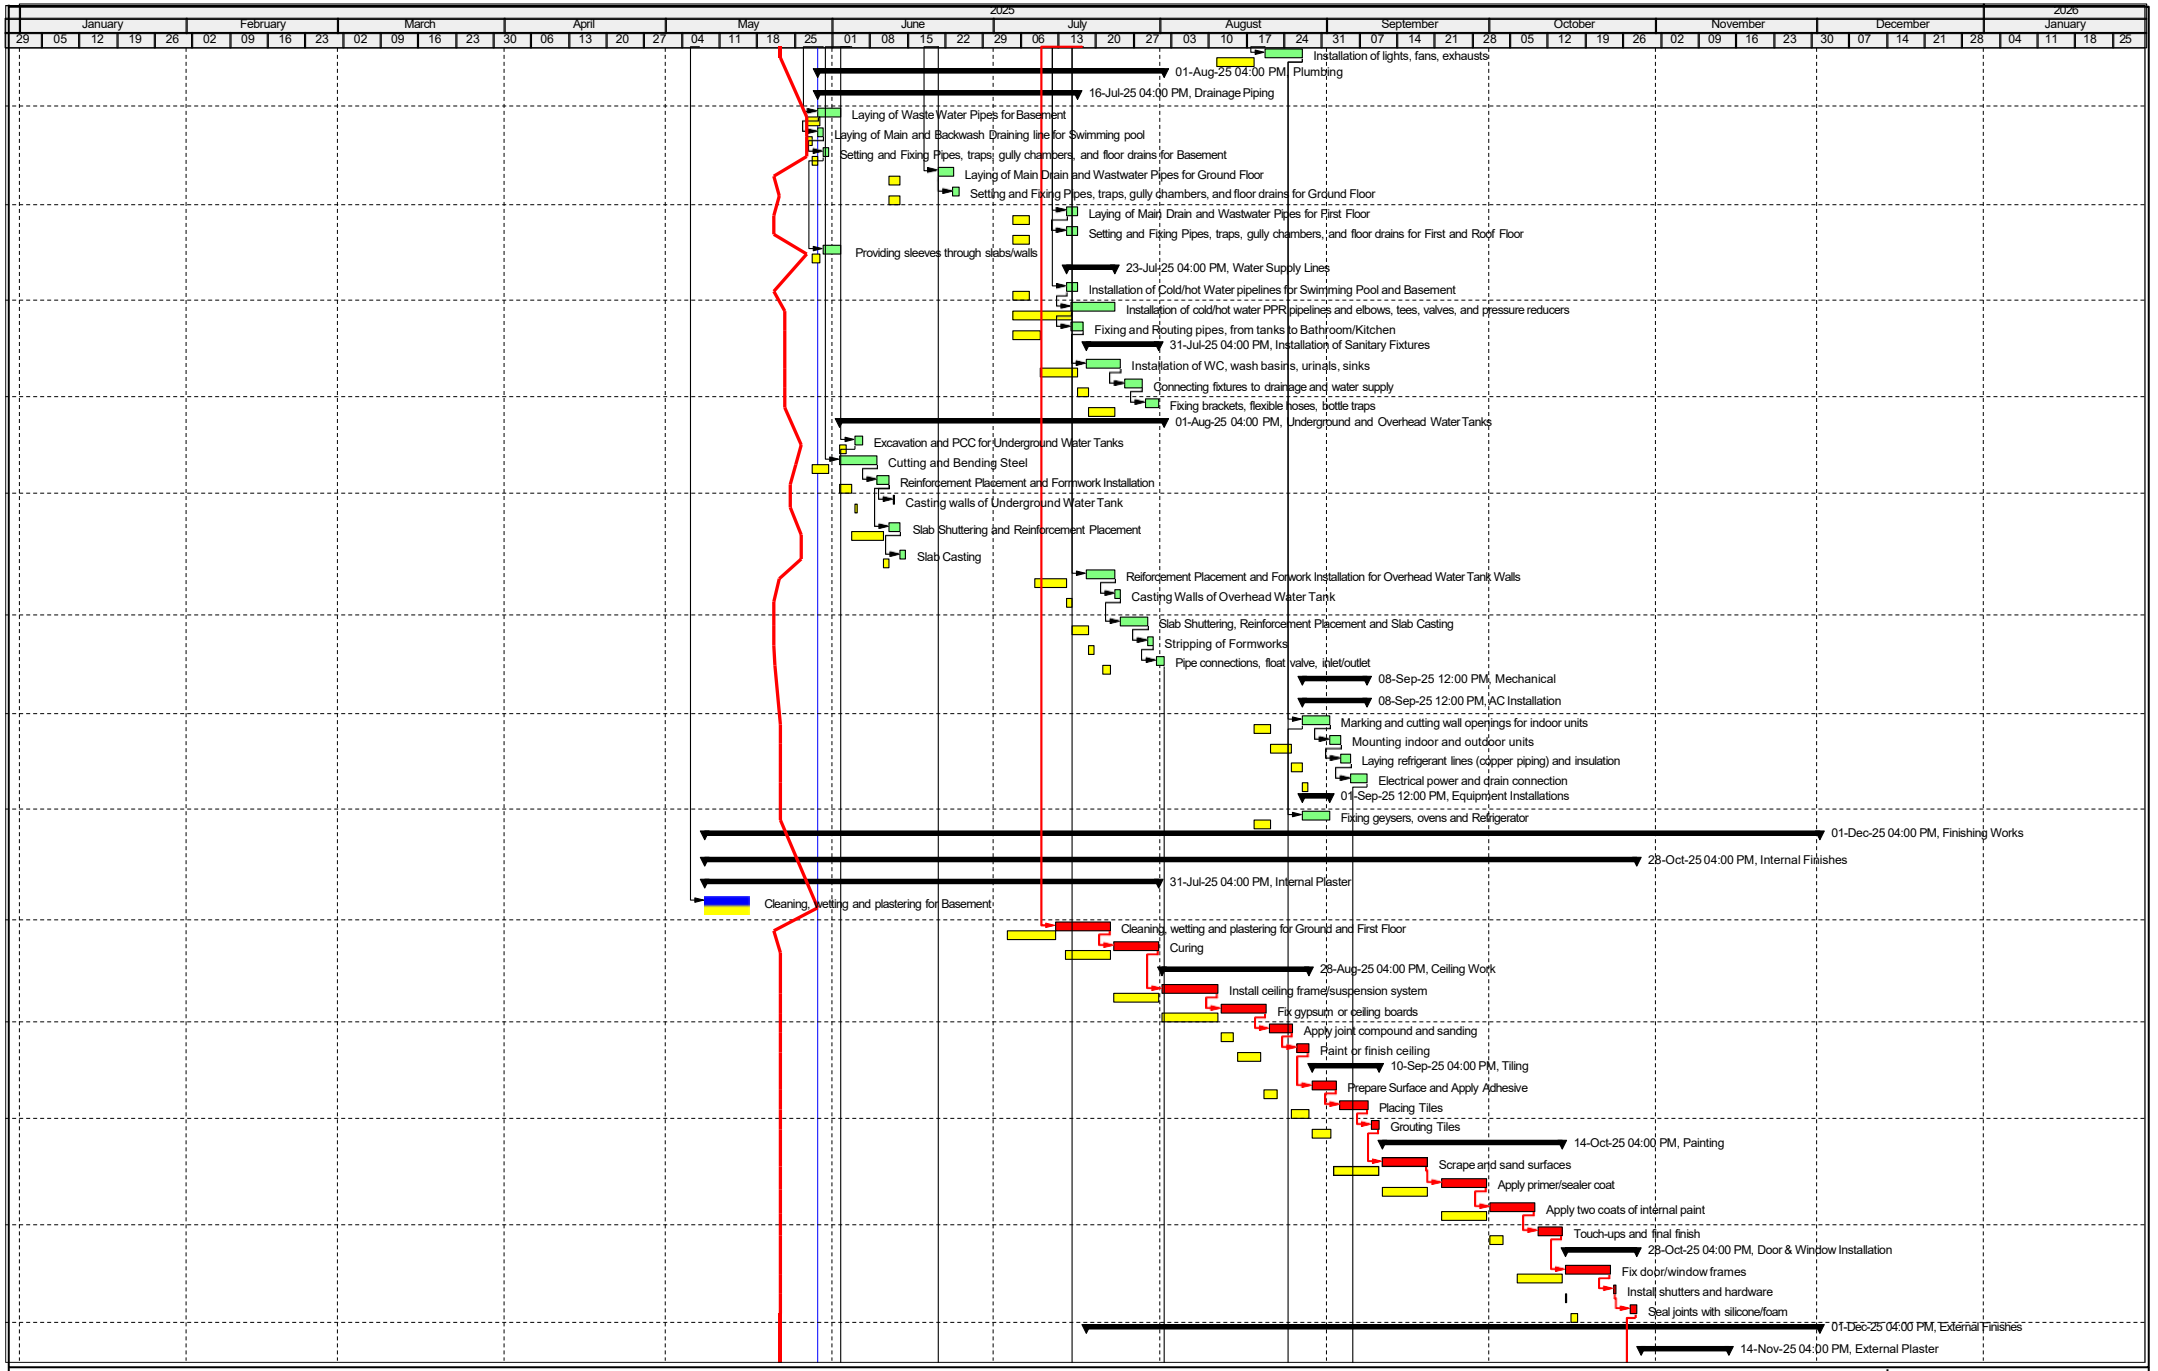

Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

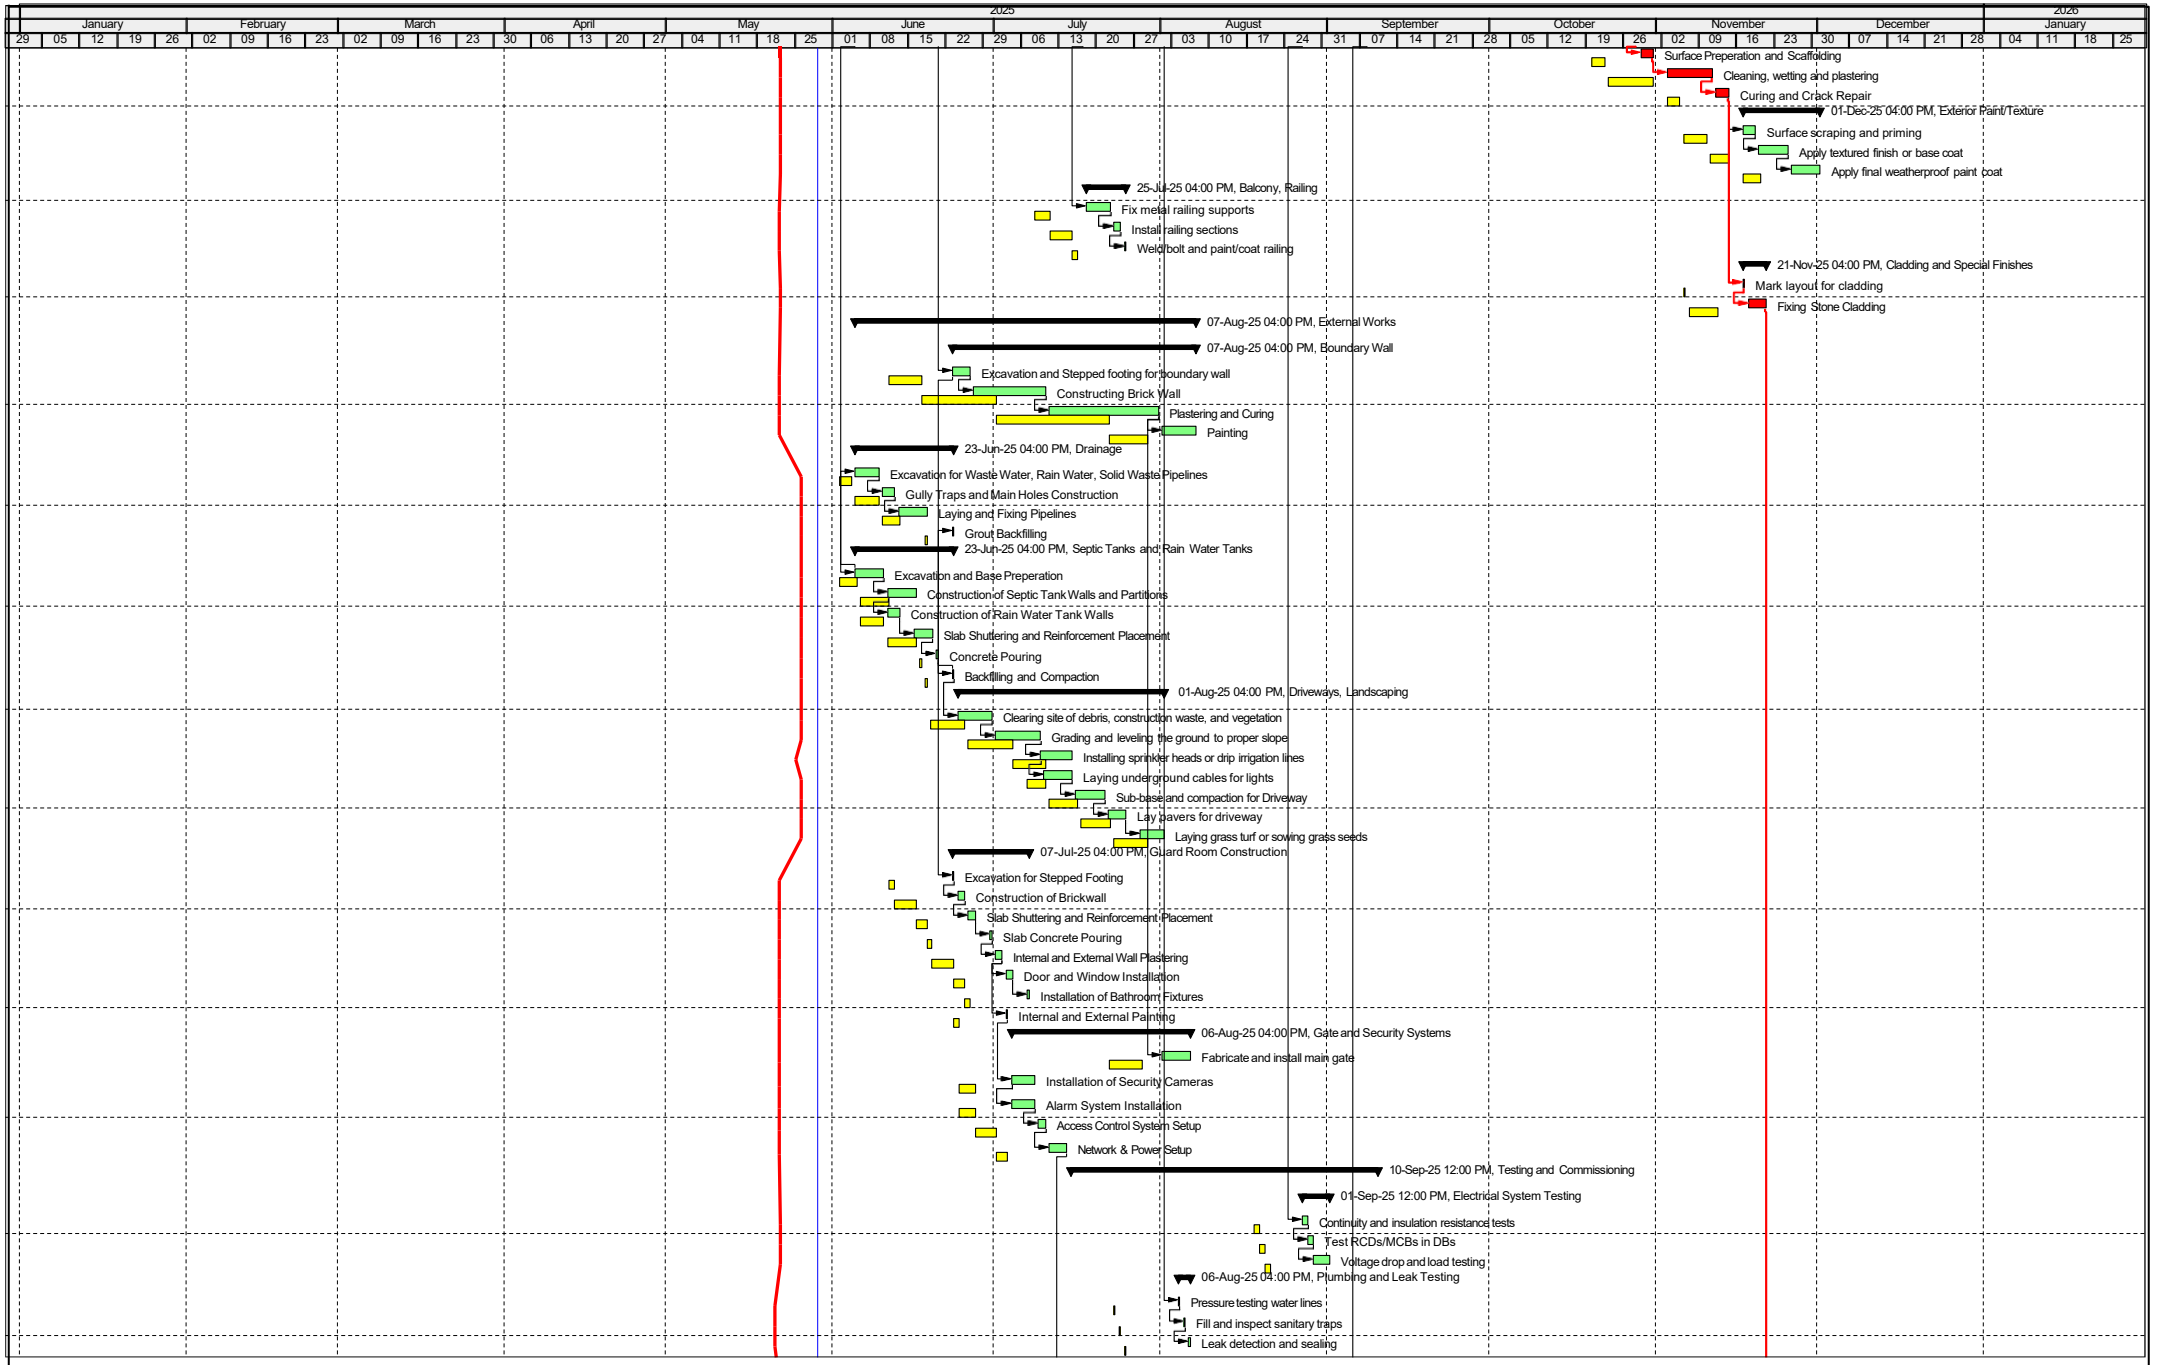

Actual Work
Remaining Work
Critical Remaining Work
Start Constraint
Milestone
summary
Primary Baseline

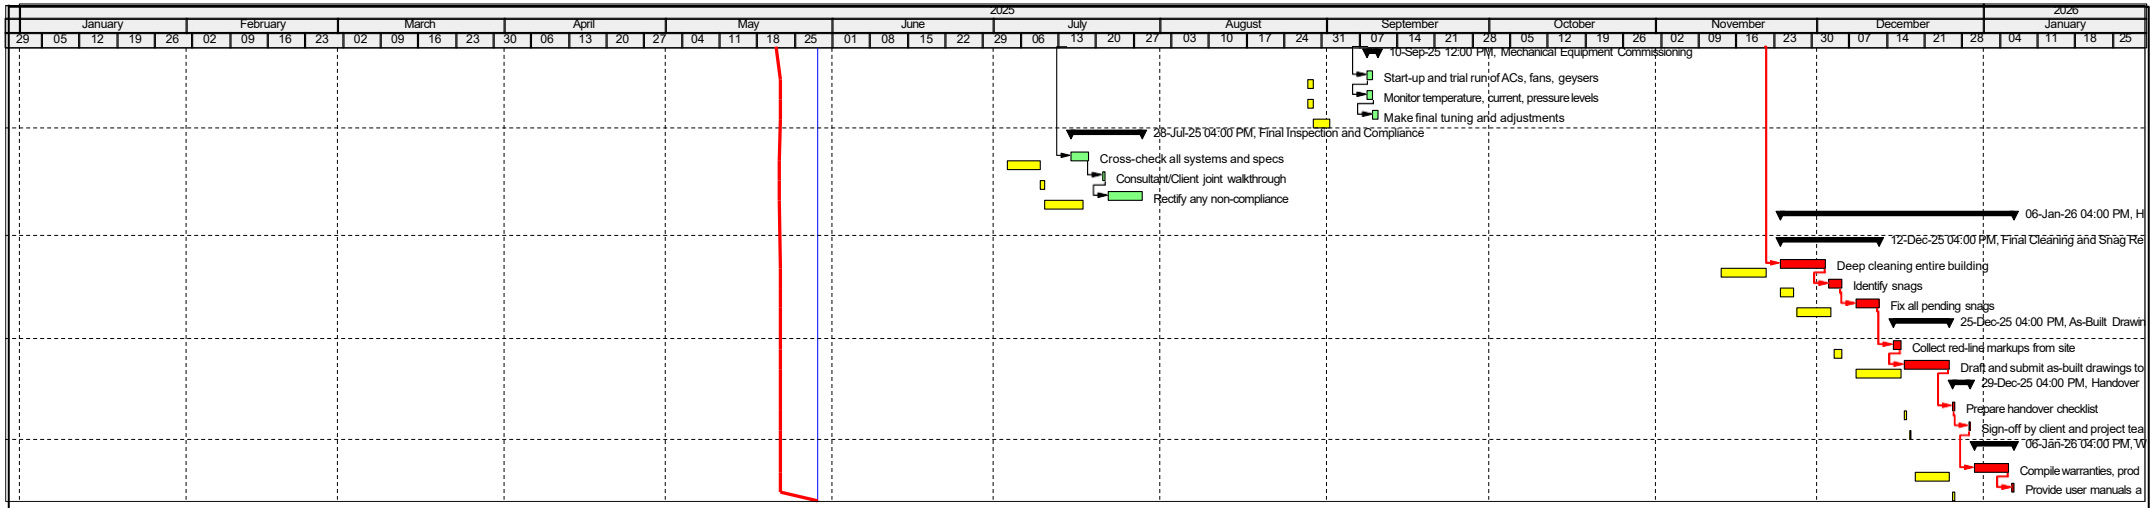


Figure 10 Earned Value Analysis (Ganting)

ISSUES REPORT

Issue	WBS	Status	Priority	Activity ID	Activity Name
Start Date Variance (days) is -2 on Activity: A1030	EC01000.1.1	Open	3 - Normal	A1030	Geotechnical report preparation
Start Date Variance (days) is -1 on Activity: A1040	EC01000.1.2	Open	3 - Normal	A1040	Drawing preparation
Start Date Variance (days) is -2 on Activity: A1050	EC01000.1.2	Open	3 - Normal	A1050	Submission to local authority
Start Date Variance (days) is -2 on Activity: A1060	EC01000.1.2	Open	3 - Normal	A1060	Revisions and approval follow-up
Start Date Variance (days) is -4 on Activity: A1170	EC01000.2.2	Open	3 - Normal	A1170	Reinforcement Placement
Start Date Variance (days) is -2 on Activity: A1190	EC01000.2.3	Open	3 - Normal	A1190	Raft Concreting
Start Date Variance (days) is -3 on Activity: A1200	EC01000.2.3	Open	3 - Normal	A1200	Curing
Start Date Variance (days) is -1 on Activity: A1205	EC01000.2.3	Open	3 - Normal	A1205	Stripping of Formwork
Start Date Variance (days) is -1 on Activity: A1210	EC01000.2.4	Open	3 - Normal	A1210	Layout marking
Start Date Variance (days) is -3 on Activity: A1220	EC01000.2.4	Open	3 - Normal	A1220	Cutting and bending steel
Start Date Variance (days) is -2 on Activity: A1230	EC01000.2.4	Open	3 - Normal	A1230	Reiforcement Placement
Start Date Variance (days) is -1 on Activity: A1240	EC01000.2.4	Open	3 - Normal	A1240	Shuttering/formwork installation
Start Date Variance (days) is -1 on Activity: A1250	EC01000.2.5	Open	3 - Normal	A1250	Concrete Pouring
Start Date Variance (days) is -1 on Activity: A1260	EC01000.2.5	Open	3 - Normal	A1260	Curing
Start Date Variance (days) is -1 on Activity: A1263	EC01000.2.6	Open	3 - Normal	A1263	Cutting and bending steel
Start Date Variance (days) is -2 on Activity: A1264	EC01000.2.6	Open	3 - Normal	A1264	Reinforcement Placement
Start Date Variance (days) is -2 on Activity: A1265	EC01000.2.6	Open	3 - Normal	A1265	Concrete Pouring
Start Date Variance (days) is -3 on Activity: A1266	EC01000.2.6	Open	3 - Normal	A1266	Curing
Start Date Variance (days) is -1 on Activity: A1270	EC01000.2.7	Open	3 - Normal	A1270	Earth filling in layers
Start Date Variance (days) is -1 on Activity: A1280	EC01000.2.7	Open	3 - Normal	A1280	Mechanical compaction
Start Date Variance (days) is -1 on Activity: A1290	EC01000.2.7	Open	3 - Normal	A1290	Leveling
Start Date Variance (days) is -3 on Activity: A1320	EC01000.2.8	Open	3 - Normal	A1320	Cutting and Bending steel bars
Start Date Variance (days) is -4 on Activity: A1325	EC01000.2.8	Open	3 - Normal	A1325	Shuttering and Reinforcement Placement
Start Date Variance (days) is -3 on Activity: A1330	EC01000.2.8	Open	3 - Normal	A1330	Concrete pouring
Start Date Variance (days) is -4 on Activity: A1332	EC01000.2.8	Open	3 - Normal	A1332	Curing
Start Date Variance (days) is -3 on Activity: A1336	EC01000.2.8	Open	3 - Normal	A1336	Stripping of Formwork
Start Date Variance (days) is -3 on Activity: A1340	EC01000.3.1.1	Open	3 - Normal	A1340	Column Marking
Start Date Variance (days) is -4 on Activity: A1345	EC01000.3.1.1	Open	3 - Normal	A1345	Cutting and Bending Steel
Start Date Variance (days) is -4 on Activity: A1350	EC01000.3.1.1	Open	3 - Normal	A1350	Reinforcement Placement and Shuttering
Start Date Variance (days) is -4 on Activity: A1360	EC01000.3.1.2	Open	3 - Normal	A1360	Beam Level Marking
Start Date Variance (days) is -3 on Activity: A1361	EC01000.2.5	Open	3 - Normal	A1361	Stripping of Formwork
Start Date Variance (days) is -4 on Activity: A1370	EC01000.3.1.2	Open	3 - Normal	A1370	Shuttering Placement
Start Date Variance (days) is -4 on Activity: A1375	EC01000.3.1.2	Open	3 - Normal	A1375	Cutting and Bending Steel
Start Date Variance (days) is -3 on Activity: A1380	EC01000.3.1.2	Open	3 - Normal	A1380	Reinforcement Placement
Start Date Variance (days) is -5 on Activity: A1385	EC01000.3.1.2	Open	3 - Normal	A1385	Stripping of Formwork
Start Date Variance (days) is -4 on Activity: A1390	EC01000.3.1.3	Open	3 - Normal	A1390	Staircase Marking
Start Date Variance (days) is -4 on Activity: A1395	EC01000.3.1.3	Open	3 - Normal	A1395	Cutting and Bending Steel
Start Date Variance (days) is -3 on Activity: A1400	EC01000.3.1.3	Open	3 - Normal	A1400	Reinforcement Placement and Shuttering
Start Date Variance (days) is -5 on Activity: A1405	EC01000.3.1.3	Open	3 - Normal	A1405	Stripping of Formwork
Start Date Variance (days) is -4 on Activity: A1410	EC01000.3.1.4	Open	3 - Normal	A1410	Column Concrete Pouring
Start Date Variance (days) is -3 on Activity: A1420	EC01000.3.1.4	Open	3 - Normal	A1420	Staircase, Beam and Slab Poring
Start Date Variance (days) is -5 on Activity: A1424	EC01000.3.1.4	Open	3 - Normal	A1424	Curing Column
Start Date Variance (days) is -4 on Activity: A1428	EC01000.3.1.4	Open	3 - Normal	A1428	Curing Slab
Start Date Variance (days) is -7 on Activity: A1430	EC01000.3.1.5	Open	3 - Normal	A1430	External Walls Construction
Start Date Variance (days) is -7 on Activity: A1440	EC01000.3.1.5	Open	3 - Normal	A1440	Internal Wall Construction
Start Date Variance (days) is -3 on Activity: A1450	EC01000.3.2.1	Open	3 - Normal	A1450	Column Marking
Start Date Variance (days) is -5 on Activity: A1455	EC01000.3.2.1	Open	3 - Normal	A1455	Cutting and Bending Steel
Start Date Variance (days) is -7 on Activity: A1460	EC01000.3.2.1	Open	3 - Normal	A1460	Shuttering and Reinforcement Placement
Start Date Variance (days) is -7 on Activity: A1470	EC01000.3.2.2	Open	3 - Normal	A1470	Beam Level Marking
Start Date Variance (days) is -7 on Activity: A1480	EC01000.3.2.2	Open	3 - Normal	A1480	Shuttering Placement
Start Date Variance (days) is -5 on Activity: A1485	EC01000.3.2.2	Open	3 - Normal	A1485	Cutting and Bending Steel
Start Date Variance (days) is -7 on Activity: A1490	EC01000.3.2.2	Open	3 - Normal	A1490	Reinforcement Placement
Start Date Variance (days) is -8 on Activity: A1495	EC01000.3.2.2	Open	3 - Normal	A1495	Stripping of Formwork
Start Date Variance (days) is -7 on Activity: A1500	EC01000.3.2.3	Open	3 - Normal	A1500	Staircase Marking
Start Date Variance (days) is -5 on Activity: A1505	EC01000.3.2.3	Open	3 - Normal	A1505	Cutting and Bending Steel
Start Date Variance (days) is -7 on Activity: A1510	EC01000.3.2.3	Open	3 - Normal	A1510	Reinforcement Placement and Shuttering
Start Date Variance (days) is -8 on Activity: A1514	EC01000.3.2.3	Open	3 - Normal	A1514	Stripping of Formwork
Start Date Variance (days) is -8 on Activity: A1518	EC01000.3.2.4	Open	3 - Normal	A1518	Column Concret Pouring
Start Date Variance (days) is -7 on Activity: A1520	EC01000.3.2.4	Open	3 - Normal	A1520	Staircase, Beam and Slab Poring
Start Date Variance (days) is -8 on Activity: A1524	EC01000.3.2.4	Open	3 - Normal	A1524	Curing Column
Start Date Variance (days) is -8 on Activity: A1528	EC01000.3.2.4	Open	3 - Normal	A1528	Curing Slab
Start Date Variance (days) is -6 on Activity: A1530	EC01000.3.2.5	Open	3 - Normal	A1530	External Walls Construction
Start Date Variance (days) is -6 on Activity: A1540	EC01000.3.2.5	Open	3 - Normal	A1540	Internal Wall Construction

Issue	WBS	Status	Priority	Activity ID	Activity Name
Start Date Variance (days) is -8 on Activity: A1545	EC01000.3.2.5	Open	3 - Normal	A1545	Parapet Wall Construction
Start Date Variance (days) is -6 on Activity: A1550	EC01000.4.1.1	Open	3 - Normal	A1550	Marking routes and Cutting chases
Start Date Variance (days) is -8 on Activity: A1560	EC01000.4.1.1	Open	3 - Normal	A1560	Laying and Fiixing of PVC conduits in Basement Slab
Start Date Variance (days) is -4 on Activity: A1563	EC01000.4.1.1	Open	3 - Normal	A1563	Laying and Fiixing of PVC conduits in Ground Floor Slab
Start Date Variance (days) is -7 on Activity: A1566	EC01000.4.1.1	Open	3 - Normal	A1566	Laying and Fiixing of PVC conduits in First Floor Slab
Start Date Variance (days) is -8 on Activity: A1569	EC01000.4.1.1	Open	3 - Normal	A1569	Laying and Fiixing of PVC conduits in Walls
Start Date Variance (days) is -7 on Activity: A1570	EC01000.4.1.1	Open	3 - Normal	A1570	Fixing junction boxes and switch boxes
Start Date Variance (days) is -7 on Activity: A1580	EC01000.4.1.1	Open	3 - Normal	A1580	Inspection before plastering or slab casting
Start Date Variance (days) is -7 on Activity: A1590	EC01000.4.1.2	Open	3 - Normal	A1590	Pulling wires through conduits
Start Date Variance (days) is -7 on Activity: A1600	EC01000.4.1.2	Open	3 - Normal	A1600	Terminating wires in switch boxes and DBs
Start Date Variance (days) is -7 on Activity: A1610	EC01000.4.1.2	Open	3 - Normal	A1610	Segregation of lighting, power, and HVAC wiring
Start Date Variance (days) is -7 on Activity: A1620	EC01000.4.1.3	Open	3 - Normal	A1620	Mounting DBs and electrical panels
Start Date Variance (days) is -7 on Activity: A1630	EC01000.4.1.3	Open	3 - Normal	A1630	Connecting incoming/outgoing wires with MCBs/isolators
Start Date Variance (days) is -7 on Activity: A1640	EC01000.4.1.3	Open	3 - Normal	A1640	Earthing connection and neutral link bar setup
Start Date Variance (days) is -7 on Activity: A1645	EC01000.4.1.4	Open	3 - Normal	A1645	Fixing modular switches, sockets, dimmers, regulators
Start Date Variance (days) is -7 on Activity: A1650	EC01000.4.1.4	Open	3 - Normal	A1650	Installation of lights, fans, exhausts
Start Date Variance (days) is -2 on Activity: A1670	EC01000.4.2.1	Open	3 - Normal	A1670	Laying of Waste Water Pipes for Basement
Start Date Variance (days) is -2 on Activity: A1673	EC01000.4.2.1	Open	3 - Normal	A1673	Laying of Main and Backwash Draining line for Swimming pool
Start Date Variance (days) is -2 on Activity: A1676	EC01000.4.2.1	Open	3 - Normal	A1676	Setting and Fixing Pipes, traps, gully chambers, and floor drains fo
Start Date Variance (days) is -8 on Activity: A1679	EC01000.4.2.1	Open	3 - Normal	A1679	Laying of Main Drain and Wastwater Pipes for Ground Floor
Start Date Variance (days) is -7 on Activity: A1680	EC01000.4.2.1	Open	3 - Normal	A1680	Setting and Fixing Pipes, traps, gully chambers, and floor drains fo
Start Date Variance (days) is -8 on Activity: A1684	EC01000.4.2.1	Open	3 - Normal	A1684	Laying of Main Drain and Wastwater Pipes for First Floor
Start Date Variance (days) is -8 on Activity: A1688	EC01000.4.2.1	Open	3 - Normal	A1688	Setting and Fixing Pipes, traps, gully chambers, and floor drains fo
Start Date Variance (days) is -2 on Activity: A1690	EC01000.4.2.1	Open	3 - Normal	A1690	Providing sleeves through slabs/walls
Start Date Variance (days) is -8 on Activity: A1695	EC01000.4.2.2	Open	3 - Normal	A1695	Installation of Cold/hot Water pipelines for Swimming Pool and Ba
Start Date Variance (days) is -6 on Activity: A1700	EC01000.4.2.2	Open	3 - Normal	A1700	Installation of cold/hot water PPR pipelines and elbows, tees, valve
Start Date Variance (days) is -6 on Activity: A1710	EC01000.4.2.2	Open	3 - Normal	A1710	Fixing and Routing pipes, from tanks to Bathroom/Kitchen
Start Date Variance (days) is -6 on Activity: A1720	EC01000.4.2.3	Open	3 - Normal	A1720	Installation of WC, wash basins, urinals, sinks
Start Date Variance (days) is -6 on Activity: A1730	EC01000.4.2.3	Open	3 - Normal	A1730	Connecting fixtures to drainage and water supply
Start Date Variance (days) is -6 on Activity: A1740	EC01000.4.2.3	Open	3 - Normal	A1740	Fixing brackets, flexible hoses, bottle traps
Start Date Variance (days) is -3 on Activity: A1750	EC01000.4.2.4	Open	3 - Normal	A1750	Excavation and PCC for Underground Water Tanks
Start Date Variance (days) is -4 on Activity: A1760	EC01000.4.2.4	Open	3 - Normal	A1760	Cutting and Bending Steel
Start Date Variance (days) is -5 on Activity: A1765	EC01000.4.2.4	Open	3 - Normal	A1765	Reinforcement Placement and Formwork Installation
Start Date Variance (days) is -5 on Activity: A1770	EC01000.4.2.4	Open	3 - Normal	A1770	Casting walls of Underground Water Tank
Start Date Variance (days) is -3 on Activity: A1774	EC01000.4.2.4	Open	3 - Normal	A1774	Slab Shuttering and Reinforcement Placement
Start Date Variance (days) is -3 on Activity: A1778	EC01000.4.2.4	Open	3 - Normal	A1778	Slab Casting
Start Date Variance (days) is -7 on Activity: A1780	EC01000.4.2.4	Open	3 - Normal	A1780	Reiforcement Placement and Forwork Installation for Overhead Wa
Start Date Variance (days) is -8 on Activity: A1790	EC01000.4.2.4	Open	3 - Normal	A1790	Casting Walls of Overhead Water Tank
Start Date Variance (days) is -8 on Activity: A1800	EC01000.4.2.4	Open	3 - Normal	A1800	Slab Shuttering, Reinforcement Placement and Slab Casting
Start Date Variance (days) is -8 on Activity: A1810	EC01000.4.2.4	Open	3 - Normal	A1810	Stripping of Formworks
Start Date Variance (days) is -8 on Activity: A1815	EC01000.4.2.4	Open	3 - Normal	A1815	Pipe connections, float valve, inlet/outlet
Start Date Variance (days) is -7 on Activity: A1820	EC01000.4.3.1	Open	3 - Normal	A1820	Marking and cutting wall openings for indoor units
Start Date Variance (days) is -7 on Activity: A1830	EC01000.4.3.1	Open	3 - Normal	A1830	Mounting indoor and outdoor units
Start Date Variance (days) is -7 on Activity: A1840	EC01000.4.3.1	Open	3 - Normal	A1840	Laying refrigerant lines (copper piping) and insulation
Start Date Variance (days) is -7 on Activity: A1850	EC01000.4.3.1	Open	3 - Normal	A1850	Electrical power and drain connection
Start Date Variance (days) is -7 on Activity: A1860	EC01000.4.3.2	Open	3 - Normal	A1860	Fixing geysers, ovens and Refrigerator
Start Date Variance (days) is -8 on Activity: A1875	EC01000.5.1.1	Open	3 - Normal	A1875	Cleaning, wetting and plastering for Ground and First Floor
Start Date Variance (days) is -7 on Activity: A1880	EC01000.5.1.1	Open	3 - Normal	A1880	Curing
Start Date Variance (days) is -7 on Activity: A1890	EC01000.5.1.2	Open	3 - Normal	A1890	Install ceiling frame/suspension system
Start Date Variance (days) is -7 on Activity: A1900	EC01000.5.1.2	Open	3 - Normal	A1900	Fix gypsum or ceiling boards
Start Date Variance (days) is -7 on Activity: A1910	EC01000.5.1.2	Open	3 - Normal	A1910	Apply joint compound and sanding
Start Date Variance (days) is -7 on Activity: A1920	EC01000.5.1.2	Open	3 - Normal	A1920	Paint or finish ceiling
Start Date Variance (days) is -7 on Activity: A1930	EC01000.5.1.3	Open	3 - Normal	A1930	Prepare Surface and Apply Adhesive
Start Date Variance (days) is -7 on Activity: A1940	EC01000.5.1.3	Open	3 - Normal	A1940	Placing Tiles
Start Date Variance (days) is -7 on Activity: A1950	EC01000.5.1.3	Open	3 - Normal	A1950	Grouting Tiles
Start Date Variance (days) is -7 on Activity: A1960	EC01000.5.1.4	Open	3 - Normal	A1960	Scrape and sand surfaces
Start Date Variance (days) is -7 on Activity: A1970	EC01000.5.1.4	Open	3 - Normal	A1970	Apply primer/sealer coat
Start Date Variance (days) is -7 on Activity: A1980	EC01000.5.1.4	Open	3 - Normal	A1980	Apply two coats of internal paint
Start Date Variance (days) is -7 on Activity: A1990	EC01000.5.1.4	Open	3 - Normal	A1990	Touch-ups and final finish
Start Date Variance (days) is -7 on Activity: A2000	EC01000.5.1.5	Open	3 - Normal	A2000	Fix door/window frames
Start Date Variance (days) is -7 on Activity: A2010	EC01000.5.1.5	Open	3 - Normal	A2010	Install shutters and hardware
Start Date Variance (days) is -7 on Activity: A2020	EC01000.5.1.5	Open	3 - Normal	A2020	Seal joints with silicone/foam
Start Date Variance (days) is -7 on Activity: A2030	EC01000.5.2.1	Open	3 - Normal	A2030	Surface Preperation and Scaffolding
Start Date Variance (days) is -7 on Activity: A2040	EC01000.5.2.1	Open	3 - Normal	A2040	Cleaning, wetting and plastering
Start Date Variance (days) is -7 on Activity: A2050	EC01000.5.2.1	Open	3 - Normal	A2050	Curing and Crack Repair

Issue	WBS	Status	Priority	Activity ID	Activity Name
Start Date Variance (days) is -7 on Activity: A2060	EC01000.5.2.2	Open	3 - Normal	A2060	Surface scraping and priming
Start Date Variance (days) is -7 on Activity: A2070	EC01000.5.2.2	Open	3 - Normal	A2070	Apply textured finish or base coat
Start Date Variance (days) is -7 on Activity: A2080	EC01000.5.2.2	Open	3 - Normal	A2080	Apply final weatherproof paint coat
Start Date Variance (days) is -7 on Activity: A2090	EC01000.5.2.3	Open	3 - Normal	A2090	Fix metal railing supports
Start Date Variance (days) is -7 on Activity: A2100	EC01000.5.2.3	Open	3 - Normal	A2100	Install railing sections
Start Date Variance (days) is -7 on Activity: A2110	EC01000.5.2.3	Open	3 - Normal	A2110	Weld/bolt and paint/coat railing
Start Date Variance (days) is -7 on Activity: A2120	EC01000.5.2.4	Open	3 - Normal	A2120	Mark layout for cladding
Start Date Variance (days) is -7 on Activity: A2130	EC01000.5.2.4	Open	3 - Normal	A2130	Fixing Stone Cladding
Start Date Variance (days) is -7 on Activity: A2140	EC01000.6.1	Open	3 - Normal	A2140	Excavation and Stepped footing for boundary wall
Start Date Variance (days) is -7 on Activity: A2150	EC01000.6.1	Open	3 - Normal	A2150	Constructing Brick Wall
Start Date Variance (days) is -7 on Activity: A2160	EC01000.6.1	Open	3 - Normal	A2160	Plastering and Curing
Start Date Variance (days) is -7 on Activity: A2170	EC01000.6.1	Open	3 - Normal	A2170	Painting
Start Date Variance (days) is -3 on Activity: A2180	EC01000.6.2	Open	3 - Normal	A2180	Excavation for Waste Water, Rain Water, Solid Waste Pipelines
Start Date Variance (days) is -3 on Activity: A2190	EC01000.6.2	Open	3 - Normal	A2190	Gully Traps and Main Holes Construction
Start Date Variance (days) is -3 on Activity: A2200	EC01000.6.2	Open	3 - Normal	A2200	Laying and Fixing Pipelines
Start Date Variance (days) is -3 on Activity: A2210	EC01000.6.2	Open	3 - Normal	A2210	Grout Backfilling
Start Date Variance (days) is -3 on Activity: A2220	EC01000.6.3	Open	3 - Normal	A2220	Excavation and Base Preperation
Start Date Variance (days) is -3 on Activity: A2230	EC01000.6.3	Open	3 - Normal	A2230	Construction of Septic Tank Walls and Partitions
Start Date Variance (days) is -3 on Activity: A2240	EC01000.6.3	Open	3 - Normal	A2240	Construction of Rain Water Tank Walls
Start Date Variance (days) is -3 on Activity: A2250	EC01000.6.3	Open	3 - Normal	A2250	Slab Shuttering and Reinforcement Placement
Start Date Variance (days) is -3 on Activity: A2260	EC01000.6.3	Open	3 - Normal	A2260	Concrete Pouring
Start Date Variance (days) is -3 on Activity: A2270	EC01000.6.3	Open	3 - Normal	A2270	Backfilling and Compaction
Start Date Variance (days) is -3 on Activity: A2280	EC01000.6.4	Open	3 - Normal	A2280	Clearing site of debris, construction waste, and vegetation
Start Date Variance (days) is -3 on Activity: A2290	EC01000.6.4	Open	3 - Normal	A2290	Grading and leveling the ground to proper slope
Start Date Variance (days) is -4 on Activity: A2300	EC01000.6.4	Open	3 - Normal	A2300	Installing sprinkler heads or drip irrigation lines
Start Date Variance (days) is -3 on Activity: A2310	EC01000.6.4	Open	3 - Normal	A2310	Laying underground cables for lights
Start Date Variance (days) is -3 on Activity: A2320	EC01000.6.4	Open	3 - Normal	A2320	Sub-base and compaction for Driveway
Start Date Variance (days) is -3 on Activity: A2330	EC01000.6.4	Open	3 - Normal	A2330	Lay pavers for driveway
Start Date Variance (days) is -3 on Activity: A2340	EC01000.6.4	Open	3 - Normal	A2340	Laying grass turf or sowing grass seeds
Start Date Variance (days) is -7 on Activity: A2350	EC01000.6.5	Open	3 - Normal	A2350	Excavation for Stepped Footing
Start Date Variance (days) is -7 on Activity: A2360	EC01000.6.5	Open	3 - Normal	A2360	Construction of Brickwall
Start Date Variance (days) is -7 on Activity: A2370	EC01000.6.5	Open	3 - Normal	A2370	Slab Shuttering and Reinforcement Placement
Start Date Variance (days) is -7 on Activity: A2380	EC01000.6.5	Open	3 - Normal	A2380	Slab Concrete Pouring
Start Date Variance (days) is -7 on Activity: A2390	EC01000.6.5	Open	3 - Normal	A2390	Internal and External Wall Plastering
Start Date Variance (days) is -7 on Activity: A2400	EC01000.6.5	Open	3 - Normal	A2400	Door and Window Installation
Start Date Variance (days) is -7 on Activity: A2410	EC01000.6.5	Open	3 - Normal	A2410	Installation of Bathroom Fixtures
Start Date Variance (days) is -7 on Activity: A2420	EC01000.6.5	Open	3 - Normal	A2420	Internal and External Painting
Start Date Variance (days) is -7 on Activity: A2430	EC01000.6.6	Open	3 - Normal	A2430	Fabricate and install main gate
Start Date Variance (days) is -7 on Activity: A2440	EC01000.6.6	Open	3 - Normal	A2440	Installation of Security Cameras
Start Date Variance (days) is -7 on Activity: A2450	EC01000.6.6	Open	3 - Normal	A2450	Alarm System Installation
Start Date Variance (days) is -7 on Activity: A2460	EC01000.6.6	Open	3 - Normal	A2460	Access Control System Setup
Start Date Variance (days) is -7 on Activity: A2470	EC01000.6.6	Open	3 - Normal	A2470	Network & Power Setup
Start Date Variance (days) is -7 on Activity: A2480	EC01000.7.1	Open	3 - Normal	A2480	Continuity and insulation resistance tests
Start Date Variance (days) is -7 on Activity: A2490	EC01000.7.1	Open	3 - Normal	A2490	Test RCDs/MCBs in DBs
Start Date Variance (days) is -7 on Activity: A2500	EC01000.7.1	Open	3 - Normal	A2500	Voltage drop and load testing
Start Date Variance (days) is -8 on Activity: A2510	EC01000.7.2	Open	3 - Normal	A2510	Pressure testing water lines
Start Date Variance (days) is -8 on Activity: A2520	EC01000.7.2	Open	3 - Normal	A2520	Fill and inspect sanitary traps
Start Date Variance (days) is -8 on Activity: A2530	EC01000.7.2	Open	3 - Normal	A2530	Leak detection and sealing
Start Date Variance (days) is -7 on Activity: A2540	EC01000.7.3	Open	3 - Normal	A2540	Start-up and trial run of ACs, fans, geysers
Start Date Variance (days) is -7 on Activity: A2550	EC01000.7.3	Open	3 - Normal	A2550	Monitor temperature, current, pressure levels
Start Date Variance (days) is -7 on Activity: A2560	EC01000.7.3	Open	3 - Normal	A2560	Make final tuning and adjustments
Start Date Variance (days) is -7 on Activity: A2570	EC01000.7.4	Open	3 - Normal	A2570	Cross-check all systems and specs
Start Date Variance (days) is -7 on Activity: A2580	EC01000.7.4	Open	3 - Normal	A2580	Consultant/Client joint walkthrough
Start Date Variance (days) is -7 on Activity: A2590	EC01000.7.4	Open	3 - Normal	A2590	Rectify any non-compliance
Start Date Variance (days) is -7 on Activity: A2600	EC01000.8.1	Open	3 - Normal	A2600	Deep cleaning entire building
Start Date Variance (days) is -7 on Activity: A2610	EC01000.8.1	Open	3 - Normal	A2610	Identify snags
Start Date Variance (days) is -7 on Activity: A2620	EC01000.8.1	Open	3 - Normal	A2620	Fix all pending snags
Start Date Variance (days) is -7 on Activity: A2630	EC01000.8.2	Open	3 - Normal	A2630	Collect red-line markups from site
Start Date Variance (days) is -7 on Activity: A2640	EC01000.8.2	Open	3 - Normal	A2640	Draft and submit as-built drawings to client
Start Date Variance (days) is -7 on Activity: A2650	EC01000.8.3	Open	3 - Normal	A2650	Prepare handover checklist
Start Date Variance (days) is -7 on Activity: A2660	EC01000.8.3	Open	3 - Normal	A2660	Sign-off by client and project team
Start Date Variance (days) is -7 on Activity: A2670	EC01000.8.4	Open	3 - Normal	A2670	Compile warranties, product data sheets
Start Date Variance (days) is -7 on Activity: A2680	EC01000.8.4	Open	3 - Normal	A2680	Provide user manuals and maintenance guides